

**Ultra Low Current XO 10 MHz to 52 MHz**


**FEATURES**

- Low phase noise (-130 dBc @ 10kHz offset).
- CMOS output with OE tri-state control.
- Selectable oscillator “on” or “off” ( Sleep Mode ) feature in output disable mode
- Ultra Low current consumption ( <2mA, <1.5mA at 27MHz, 3.3V respectively for PLL600-27 and PLL600-37)
- Ultra Low disable mode current (<2uA when disabled with osc. off)
- 10 to 52MHz fundamental or 3<sup>rd</sup> OT crystal input.
- 12mA drive capability at TTL output.
- Low jitter (RMS): 2.5ps period jitter.
- 1.8V, 2.5V and 3.3V DC operation.
- Available in 8 pin SOIC, 6 pin SOT or DIE.


**DESCRIPTION**

The PLL600-27/-37 form a low cost family of XO IC’s, designed to consume the lowest current on the market for the 10MHz to 52MHz range. It accepts fundamental resonant mode crystal input from 10 to 52MHz. Providing less than -130dBc at 10kHz offset at 30MHz and with a very low jitter (2.5 ps RMS period jitter) makes this chip ideal for applications requiring low current frequency sources.


**BLOCK DIAGRAM**

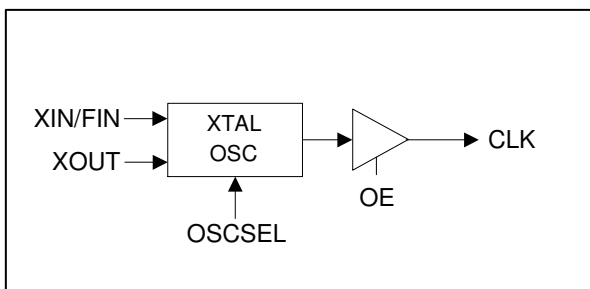

**PIN ASSIGNMENT (PACKAGE)**

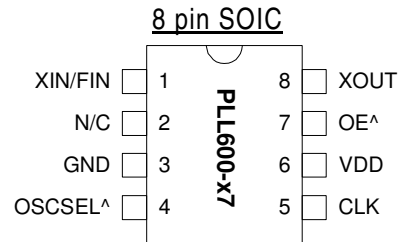

^ : denotes internal pull-up

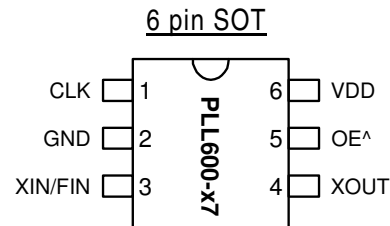

^: denotes internal Pull-up

**SELECTION TABLE**

OE^	OSCSEL^*	OUTPUT
0	0	Disabled - osc. off
0	1	Disabled - osc. on
1	0	Enabled
1	1	Enabled

^ Internal Pull-up, default value is ‘1’ when not connected.  
\* Not available in 6 pin SOT package.

**Ultra Low Current XO 10 MHz to 52 MHz**
**PIN/PAD DESCRIPTION**

Name	Pin #		Type	Description
	8 pin SOIC	6 pin SOT		
XIN	1	4	I	Crystal input or reference clock input pin.
N/C	2	n/a	I	No connect.
GND	3	2	P	Ground.
OSCSEL	4	n/a	I	Disable mode select. See Table on page 1.
CLK	5	1	O	Output clock.
VDD	6	6	P	Power supply.
OE	7	5	I	Output Enable input. See Table on page 1.
XOUT	8	3	I	Crystal output.

OE and OSCSEL have internal pull-ups, so the default value is '1' when not connected (OSCSEL not available on 6 pin package).

**ELECTRICAL SPECIFICATIONS**
**1. Absolute Maximum Ratings**

PARAMETERS	SYMBOL	MIN.	MAX.	UNITS
Supply Voltage	$V_{DD}$		4.6	V
Input Voltage, dc	$V_I$	-0.5	$V_{DD}+0.5$	V
Output Voltage, dc	$V_O$	-0.5	$V_{DD}+0.5$	V
Storage Temperature	$T_S$	-65	150	°C
Ambient Operating Temperature*	$T_A$	-40	85	°C
Junction Temperature	$T_J$		125	°C
Lead Temperature (soldering, 10s)			260	°C
ESD Protection, Human Body Model			2	kV

Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied.

\* **Note:** Operating Temperature is guaranteed by design for all parts (COMMERCIAL and INDUSTRIAL), but tested for COMMERCIAL grade only.

**2. AC Electrical Specifications**

PARAMETERS	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Crystal Frequency		10		52	MHz
Settling time	At power-up (Vdd reaches 1.62V)			10	ms
	Disable to enable, osc. Off			10	ms
	Disable to enable, osc. On			500	µs
Output Clock Rise/Fall Time	0.8V ~ 2.0V with 10 pF load		1.15		ns
	0.3V ~ 3.0V with 15 pF load		2.4		
VDD sensitivity	Frequency vs. VDD +/- 10%	0.8		0.8	ppm
Output Clock Duty Cycle	Measured @ 50% $V_{DD}$	45	50	55	%

**Ultra Low Current XO 10 MHz to 52 MHz**
**3. Jitter and Phase Noise Specifications**

PARAMETERS	CONDITIONS	MIN.	TYP.	MAX.	UNITS
RMS Period Jitter (1 sigma – 1000 samples)	With capacitive decoupling between VDD and GND.		2.1	2.5	ps
Phase Noise relative to carrier	30MHz @100Hz offset		-80		dBc/Hz
Phase Noise relative to carrier	30MHz @1kHz offset		-110		dBc/Hz
Phase Noise relative to carrier	30MHz @10kHz offset		-130		dBc/Hz
Phase Noise relative to carrier	30MHz @100kHz offset		-138		dBc/Hz
Phase Noise relative to carrier	30MHz @1MHz offset		-145		dBc/Hz

**4. DC Specification**

PARAMETERS	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Supply Current, Dynamic, with Loaded Outputs (at VDD = 3.3V) Respectively for PLL600 -27/-37	I <sub>DD</sub>	At 10MHz, Cload=15pF		1.0 / 0.75	1.1 / 0.9	mA
		At 13.5MHz, Cload=15pF		1.2 / 0.8	1.3 / 1.0	
		At 17.7MHz, Cload=15pF		1.5 / 1.0	1.6 / 1.1	
		At 27MHz, Cload=15pF		2.0 / 1.2	2.1 / 1.3	
		At 48MHz, Cload=15pF		3.5 / 2.1	3.6 / 2.2	
Supply Current in tri- state	I <sub>DD</sub>	Output disabled, Osc. off		2	4	μA
		Output disabled, Osc. On			520	μA
Operating Voltage	V <sub>DD</sub>		1.62		3.63	V
Output High Voltage	V <sub>OH</sub>	I <sub>OH</sub> = -12mA* (3.3V)	2.4			V
		-37*, I <sub>OH</sub> = -12mA* (3.3V)	2.4	2.9		V
Output Low Voltage	V <sub>OL</sub>	I <sub>OL</sub> = 12mA* (3.3V)			0.4	V
		-37*, I <sub>OL</sub> = 12mA* (3.3V)		0.32	0.4	V
Output High Voltage at CMOS level (PLL600-27)	V <sub>OHC</sub>	I <sub>OH</sub> = -4mA	V <sub>DD</sub> - 0.4			V
Output drive current (PLL600-27)		At TTL level (3.3V)	12	17		mA
Short Circuit Current		(3.3V)		±50		mA

\* **Note:** PLL600-37 has non-standard CMOS VOH and VOL levels for lower current consumption, but meets CMOS input stage needs. PLL600-37 should be used to drive pure capacitive loads only.

**5. Crystal Specifications**

PARAMETERS	SYMBOL	MIN.	TYP.	MAX.	UNITS
Crystal Resonator Frequency	F <sub>XIN</sub>	10		52	MHz
Crystal Loading Rating	C <sub>L(xtal)</sub>		8.5		pF
Maximum Sustainable Drive Level				200	μW
Operating Drive Level			50		μW
C0 (for frequencies below 30MHz)				5	pF
C0 (for frequencies above 30MHz)				4	pF
ESR	R <sub>s</sub>			30	Ω


**Note:** A detailed crystal specification document is also available for this part

**Ultra Low Current XO 10 MHz to 52 MHz**


**PACKAGE INFORMATION**

8-PIN SOIC ( dimensions in mm )

Symbol	Narrow SOIC	
	Min.	Max.
A	1.47	1.73
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	4.95
E	3.80	4.00
H	5.80	6.20
L	0.38	1.27
e	1.27 BSC	

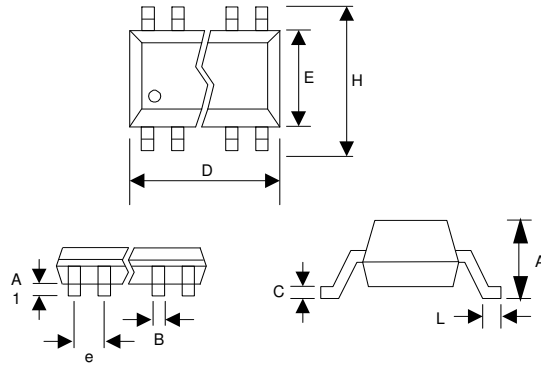

6-PIN SOIC ( dimensions in mm )

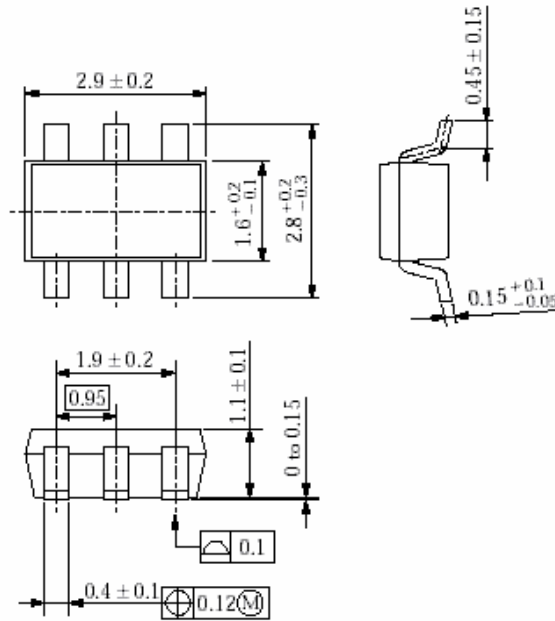

**Ultra Low Current XO 10 MHz to 52 MHz**

**ORDERING INFORMATION**


**For part ordering, please contact our Sales Department:**

47745 Fremont Blvd., Fremont, CA 94538, USA

Tel: (510) 492-0990 Fax: (510) 492-0991

**PART NUMBER**

The order number for this device is a combination of the following:  
Device number, Package type and Operating temperature range

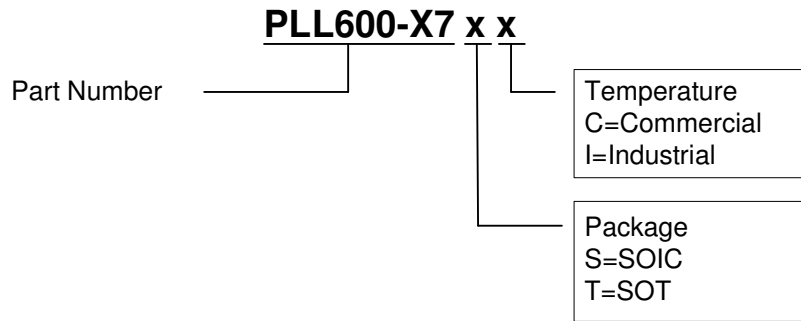

Order Number	Marking	Package Option
PLL600-27SC	P600-27 SC	8-Pin SOIC (Tube)
PLL600-27SC-R	P600-27 SC	8-Pin SOIC (Tape and Reel)
PLL600-27TC	<b>A27A1</b>	6-Pin SOT (Bulk)
PLL600-37SC	P600-37 SC	8-Pin SOIC (Tube)
PLL600-37SC-R	P600-37 SC	8-Pin SOIC (Tape and Reel)
PLL600-37TC	<b>A37A2</b>	6-Pin SOT (Bulk)

*PhaseLink Corporation, reserves the right to make changes in its products or specifications, or both at any time without notice. The information furnished by PhaseLink is believed to be accurate and reliable. However, PhaseLink makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon this product.*

**LIFE SUPPORT POLICY:** PhaseLink's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of PhaseLink Corporation.



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331