




PART NO. ENG. NO.

02-06-1131	1855-(P901)	
02-06-1132	1855-(P901)IL	
02-06-5137	1855-(P591)	OBSOLETE
02-06-5136	1855-(P591)IL	OBSOLETE
02-06-5138	1855-(P561)	
02-06-5139	1855-(P561)IL	
02-06-5130	1855-(P550)	
02-06-5135	1855-(P550)IL	
02-06-5147	1855-(P228)	
02-06-5148	1855-(P228)IL	
02-06-1141	1855-1(P901)	
NOT TOOLED	1855-1(P901)IL	
02-06-1143	1855-(P901)IL	

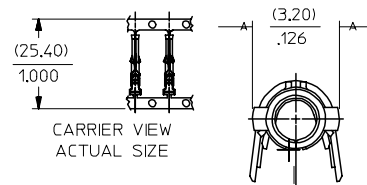

SCALE:10X



SCALE:10X

LEGEND

1855-*(****)*

BLANK=WITH LOCKING TABS
1=WITHOUT LOCKING TABS

P=PREPLATE
BLANK=POSTPLATE

FORM
BLANK=CHAIN
1=CHAIN WITH INTERLEAF
PAPER ON REEL.
L=LOOSE

FINISH CODE

NOTES:

1. MATERIAL: BRASS

2. FINISHES:

901 HOT TIN DIP (.00051)/.000020 MIN.

* 228 SELECT GOLD PLATE (.00075)/.000030 MIN. IN CONTACT AREA, SELECT TIN (.00250)/.000100 MIN. IN CRIMP AREA OVER (.00125)/.000050 MIN. NICKEL OVERALL, WITH .000010/(.000025) MAX. SELECT GOLD FLASH IN AREA INDICATED.

561 SELECT GOLD PLATE (.00076)/.000030 MIN. IN CONTACT AREA, (.00127)/.000050 MIN. NICKEL OVERALL.

591 SELECT GOLD PLATE (.00127)/.000050 MIN. IN CONTACT AREA, OVER (.00127)/.000050 MIN. NICKEL OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.


550 SELECT GOLD PLATE (.00038)/.000015 MIN. IN CONTACT AREA, OVER (.00076)/.000030 MIN. NICKLE OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.

* THE PRIMARY SHIPPING CARTON WILL BE LABELED, *COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD.

3. PRODUCT SPECIFICATION: PS-02-0-6

4. PACKAGE INFORMATION: NOT AVAILABLE

5. TERMINAL FOR USE WITH (.157)/.062 DIA. SERIES HOUSINGS AND WILL ACCEPT 24 THRU 30 AWG WIRE WITH (.102/2.29)/.040/.090 INSULATION DIAMETER.

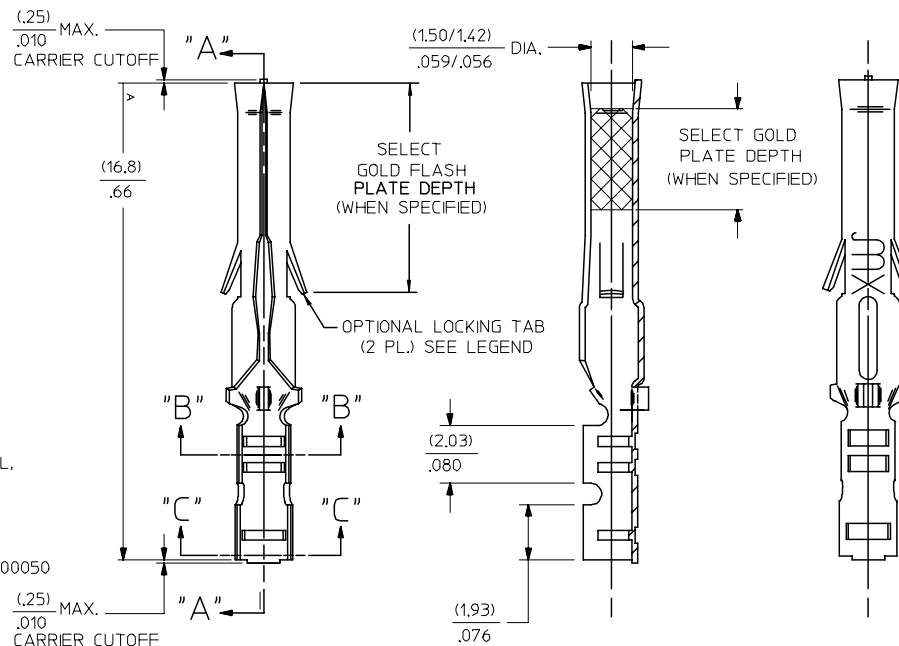

SECT. "A-A"

AP	REVISE Sn/Pb PLATE REDRAWN TO ME10 UCR2004-0097 5/07/04 RHOLTS
AN	OBSOLETE P/N UCR2002-0270 COMERC 01/9/28
AM1	OBSOLETE -JP575J & -JP575L ECR UG 0558 6/3/15/95 RW
AM	REV. AND REDRAWN PER ECR 10372 SEP 6-17-87 RW

REV. MATL. SPEC/USTAT TO ME10		EC NO.: IUCP2004L-20097		DRAWN/RHOLTS 2004/05/14		CHKD: 2004/05/14		APPR:FSMITH 2004/05/18		REV							
AP		DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 8:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION		REVISE ON CAD ONLY			
						mm INCH		DIMENSION STYLE IN/MM		TITLE							
AP		▽=0		4 PLACES ±.0005 ±.0005		DRAWN BY DATE		GEP 1987/09/17		CRIMP TERMINAL, FEMALE (157)/.062 DIA., BRASS FOR 24 THRU 30 GA. WIRE		MOLEX MOLEX INCORPORATED		SEE CHART SD-1855-*		SHEET NO. 1 OF 1	
				3 PLACES ±.001 ±.001		GEP 1987/09/17											
				2 PLACES ±0.25 ±.014		GEP 1987/09/17											
				1 PLACE ±0.35 ±.014		GEP 1987/09/17											
				ANGULAR ±1/2°		GEP 1987/09/17											
AP		▽=0		DRAFT WHERE APPLICABLE		APPROVED BY DATE		RAS 1987/09/17		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-1855-*		SHEET NO. 1 OF 1			
				MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331