

**SPECIFICATIONS**

**ELECTRICAL**

RESISTANCE RANGE ----- SEE CHART  
 RESISTANCE TOLERANCE ----- ±3%  
 LINEARITY TOLERANCE ----- ±0.25%  
 RESOLUTION ----- SEE CHART  
 END RESISTANCE AT TERM. ----- 1 OHM OR 0.1%  
 ELECTRICAL ANGLE ----- 3600±.5°  
 ELECTRICAL NOISE ----- 100 OHM MAX.  
 POWER RATING ----- 1.5 WATTS  
 MAXIMUM VOLTAGE ----- 450 VOLTS  
 INSULATION RESISTANCE ----- 1,000 MEGOHMS @ 500 V.D.C.  
 DIELECTRIC STRENGTH ----- 1,000 V.A.C.

**MECHANICAL**

NUMBER OF TURNS ----- 10  
 MECHANICAL ANGLE ----- 3600±15°-0°  
 TORQUE ----- 0.4 OZ. IN. MAX.  
 STOP STRENGTH ----- 20 OZ. IN. MAX.  
 WEIGHT ----- 0.35 OZ.

**ENVIRONMENTAL**




OPERATING TEMPERATURE ----- -55°C to +105°C  
 TEMPERATURE COEFFICIENT ----- SEE CHART  
 VIBRATION ----- 10HZ TO 2000HZ 15G  
 SHOCK ----- 50G 11ms  
 MOISTURE RESISTANCE ----- 40°C 95%RH 120 HOURS  
 ROTATIONAL LIFE ----- 1,000,000 SHAFT REVOLUTIONS

**MATERIALS**

HOUSING ----- HIGH TEMPERATURE PLASTIC  
 SHAFT ----- STAINLESS STEEL  
 BUSHING ----- BRASS  
 TERMINALS ----- GOLD PLATED  
 ELEMENT ----- WIREWOUND

RESISTANCE	20	50	100	200	500	1K	2K	5K	10K	20K	50K	100K
RESOLUTION	.070	.050	.059	.054	.039	.040	.033	.024	.021	.016	.012	.009
TEMPERATURE COEFFICIENT, PPM/°C	700	700	80	80	80	20	20	20	20	20	20	20

REV.	BY	DATE	PART NO.
C	BT	11-21 87	MW12B-10
			MECH. ANGLE WAS 3600±.5° ADDED OPERATING TEMPERATURE

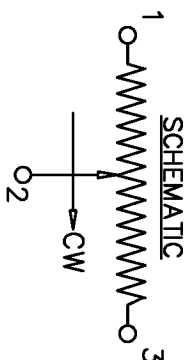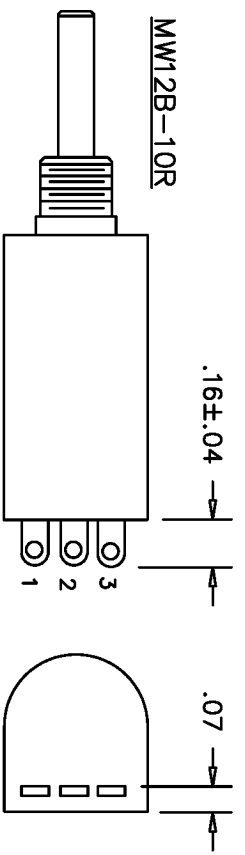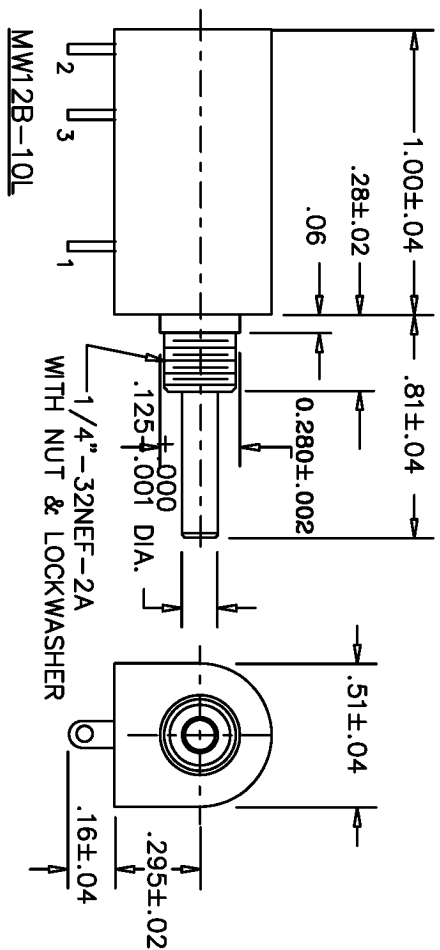


THIS DOCUMENT CONTAINS PROPRIETARY DATA OF POLARIS INDUSTRIAL ENTERPRISES, INC. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THERE OF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.

**TOLERANCES**

XX = +/- .010" FRACT. = +/- 1/64"  
 XXX = +/- .005" ANGLES = +/- 1/2°  
 ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SCALE: NONE  
 DATE: 4-3-79  
 BY: \_\_\_\_\_  
 APPR'D: BT

TITLE: MULTI-TURN POTENTIOMETER



CARLSBAD SYSTEMS CALIFORNIA

PART NO. MW12B-10



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331