



[illegible]

DOUBLE POLE

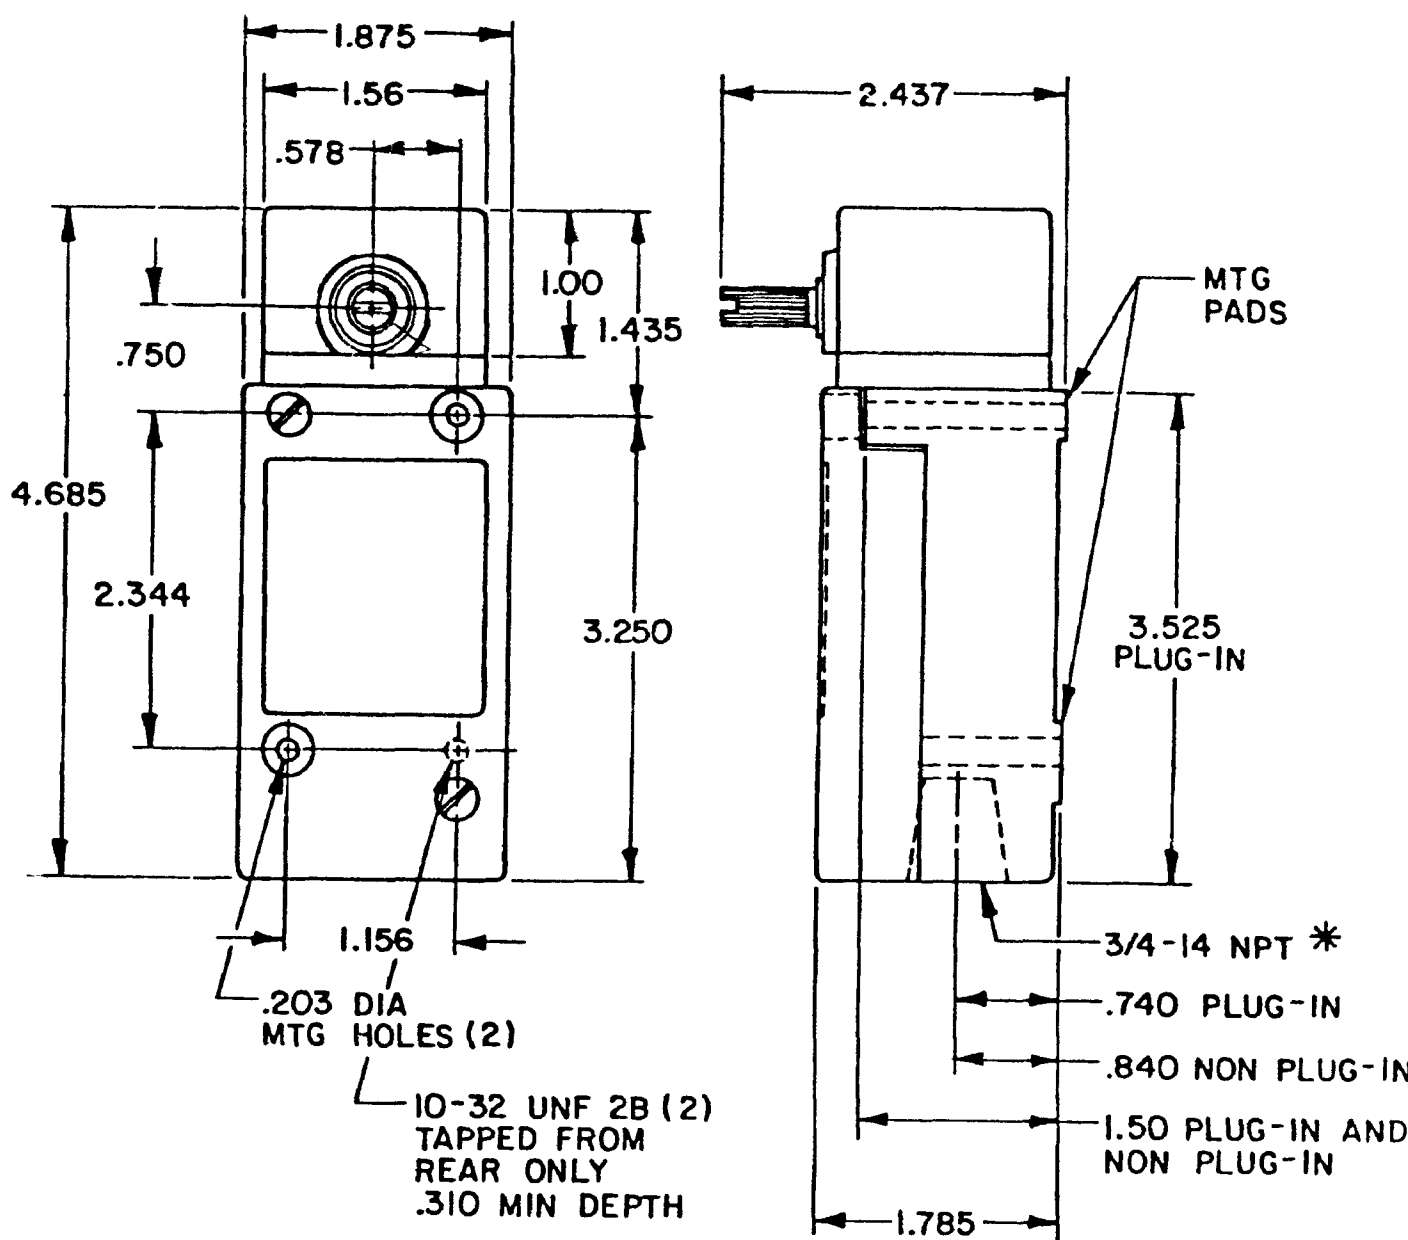


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

*(LSA6, LSH6, LSM6, LSN6, LSP6, LSR6
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE
1/2-14 NPT CONDUIT HOLE)

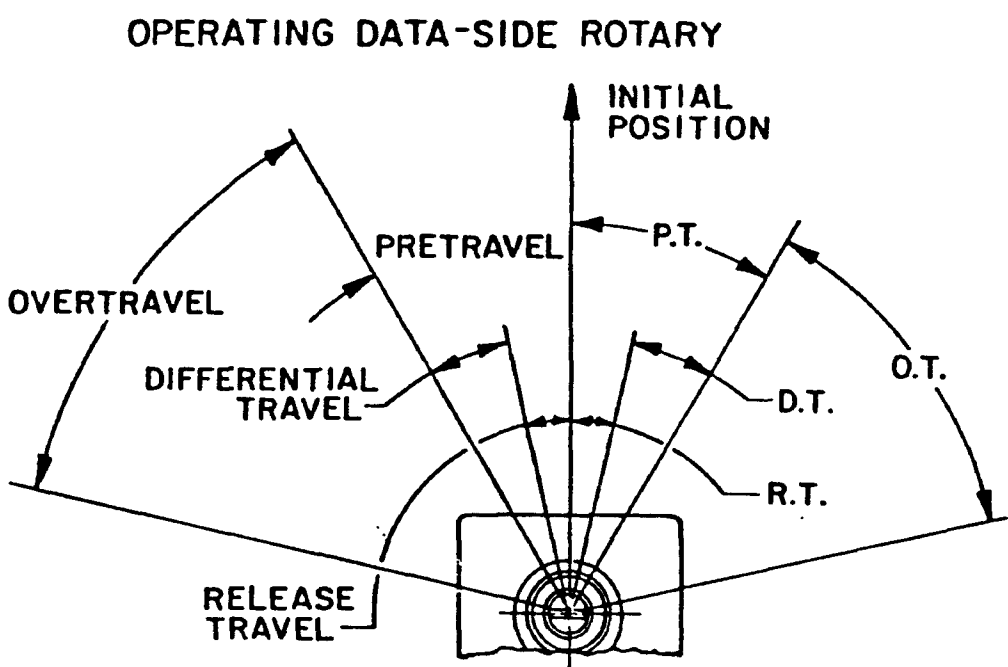

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

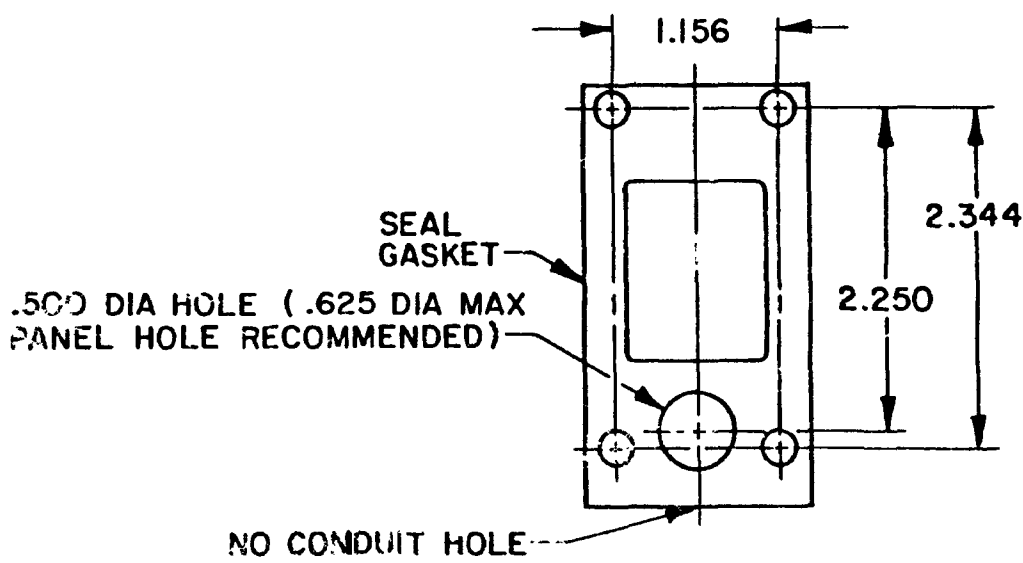

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
MICRO SWITCH a Honeywell Division FED. MFG. CODE 91929	SWITCH - ENCLOSED	CATALOG LISTING
		LSA-LSW SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE


DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE


ONE PLACE	(.0)	$\pm .030$
TWO PLACES	(.00)	$\pm .015$
THREE PLACES	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT


SIDE ROTARY CAM TRACKING

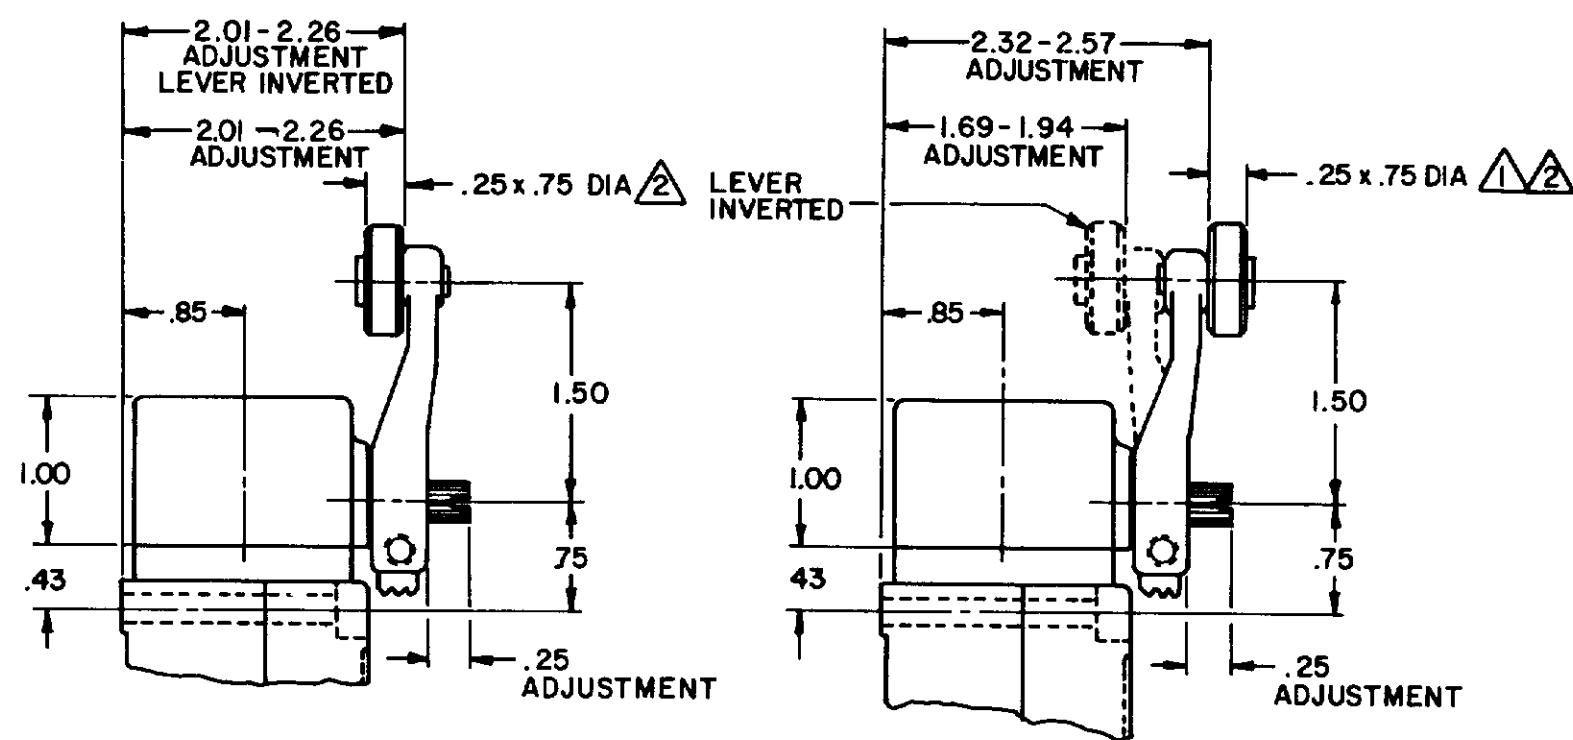


LSZ51 TYPE LEVERS

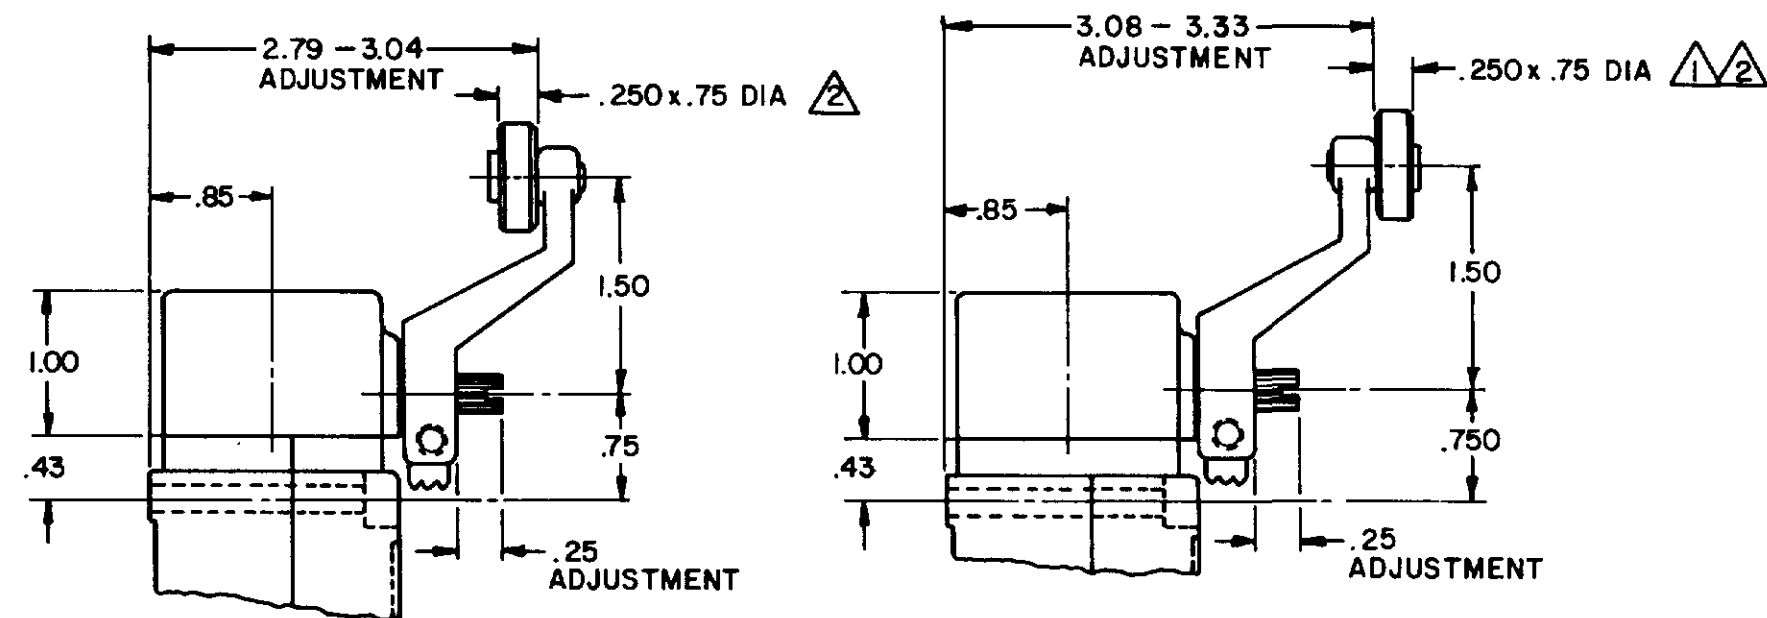


LSZ55 TYPE LEVERS

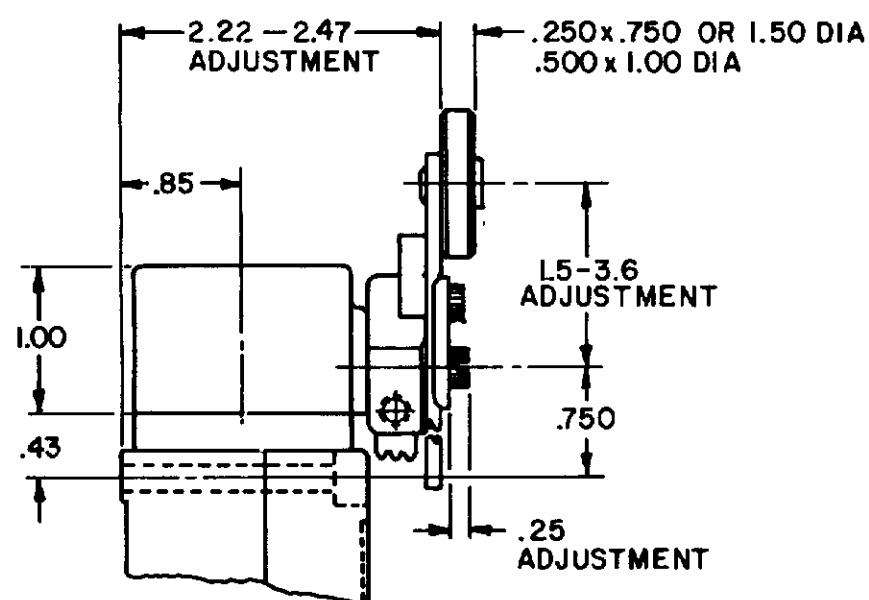


LSZ52 TYPE LEVER

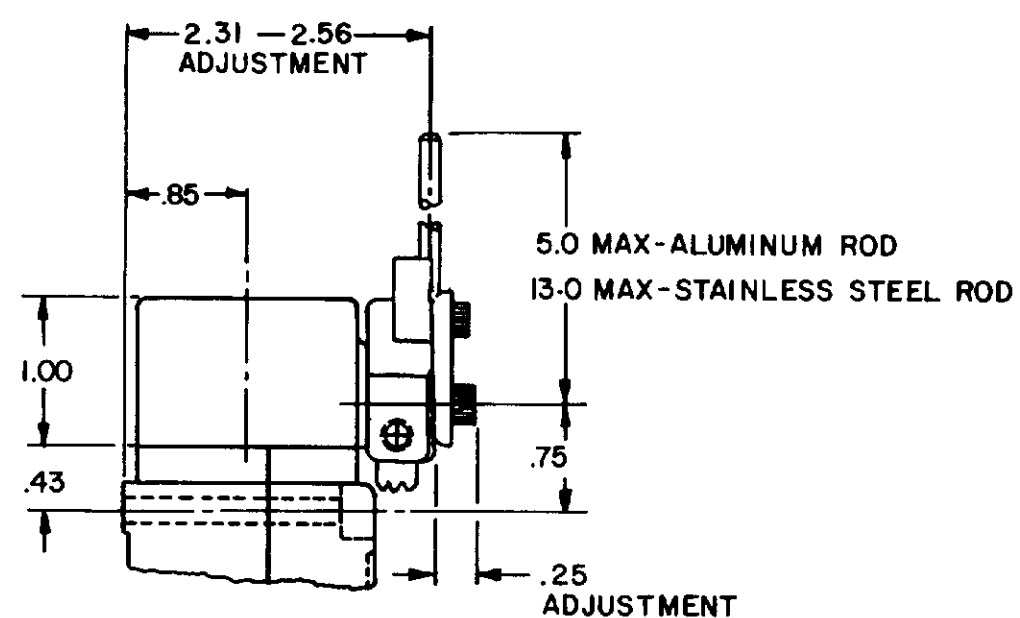

LSZ54 TYPE LEVER

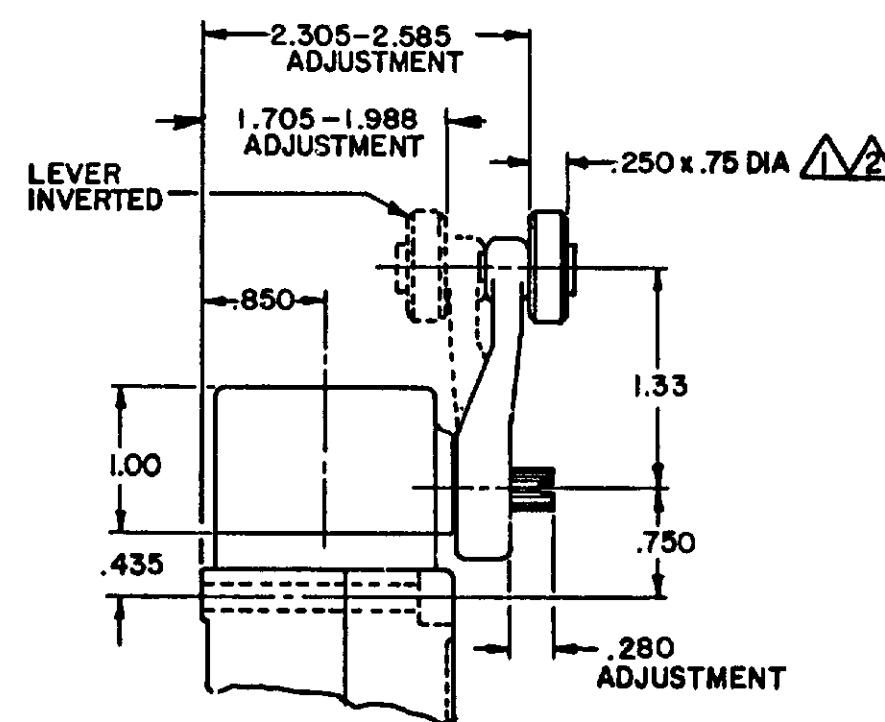

OPEN MOUNTED ROLLER

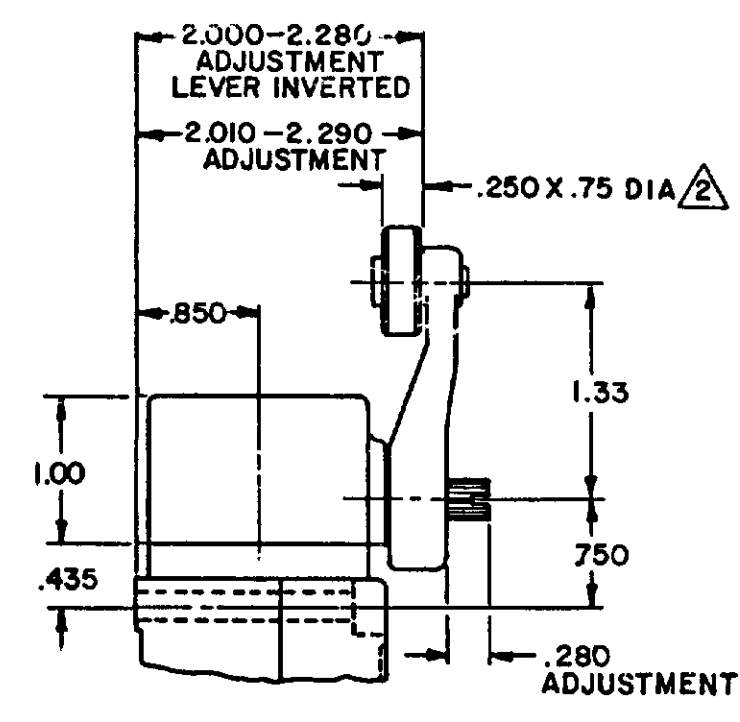

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
DRAWN
MASTER


REV	DATE	BY	CHK	DESCRIPTION
1	0031956			
2	10JUL07	BS		
3	201004	B		
4	10AUG00	C		
5	201748	C		
6	17NOV00	C		
7	202198	D		
8	20JAN01	E		
9	204871	F		
10	206581	F		
11	14OCT02	G		
12	206763	G		
13	31OCT02	H		
14	207178	H		
15	14JAN03	J		
16	207474	J		
17	18FEB03	K		
18	0006871	K		

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
ONE PLACE	(0)	±.030	
TWO PLACES	(.00)	±.015	
THREE PLACES	(.000)	±.005	
ANGLES		±	
WEIGHT			

TOP ROTARY

SINGLE POLE

DOUBLE POLE

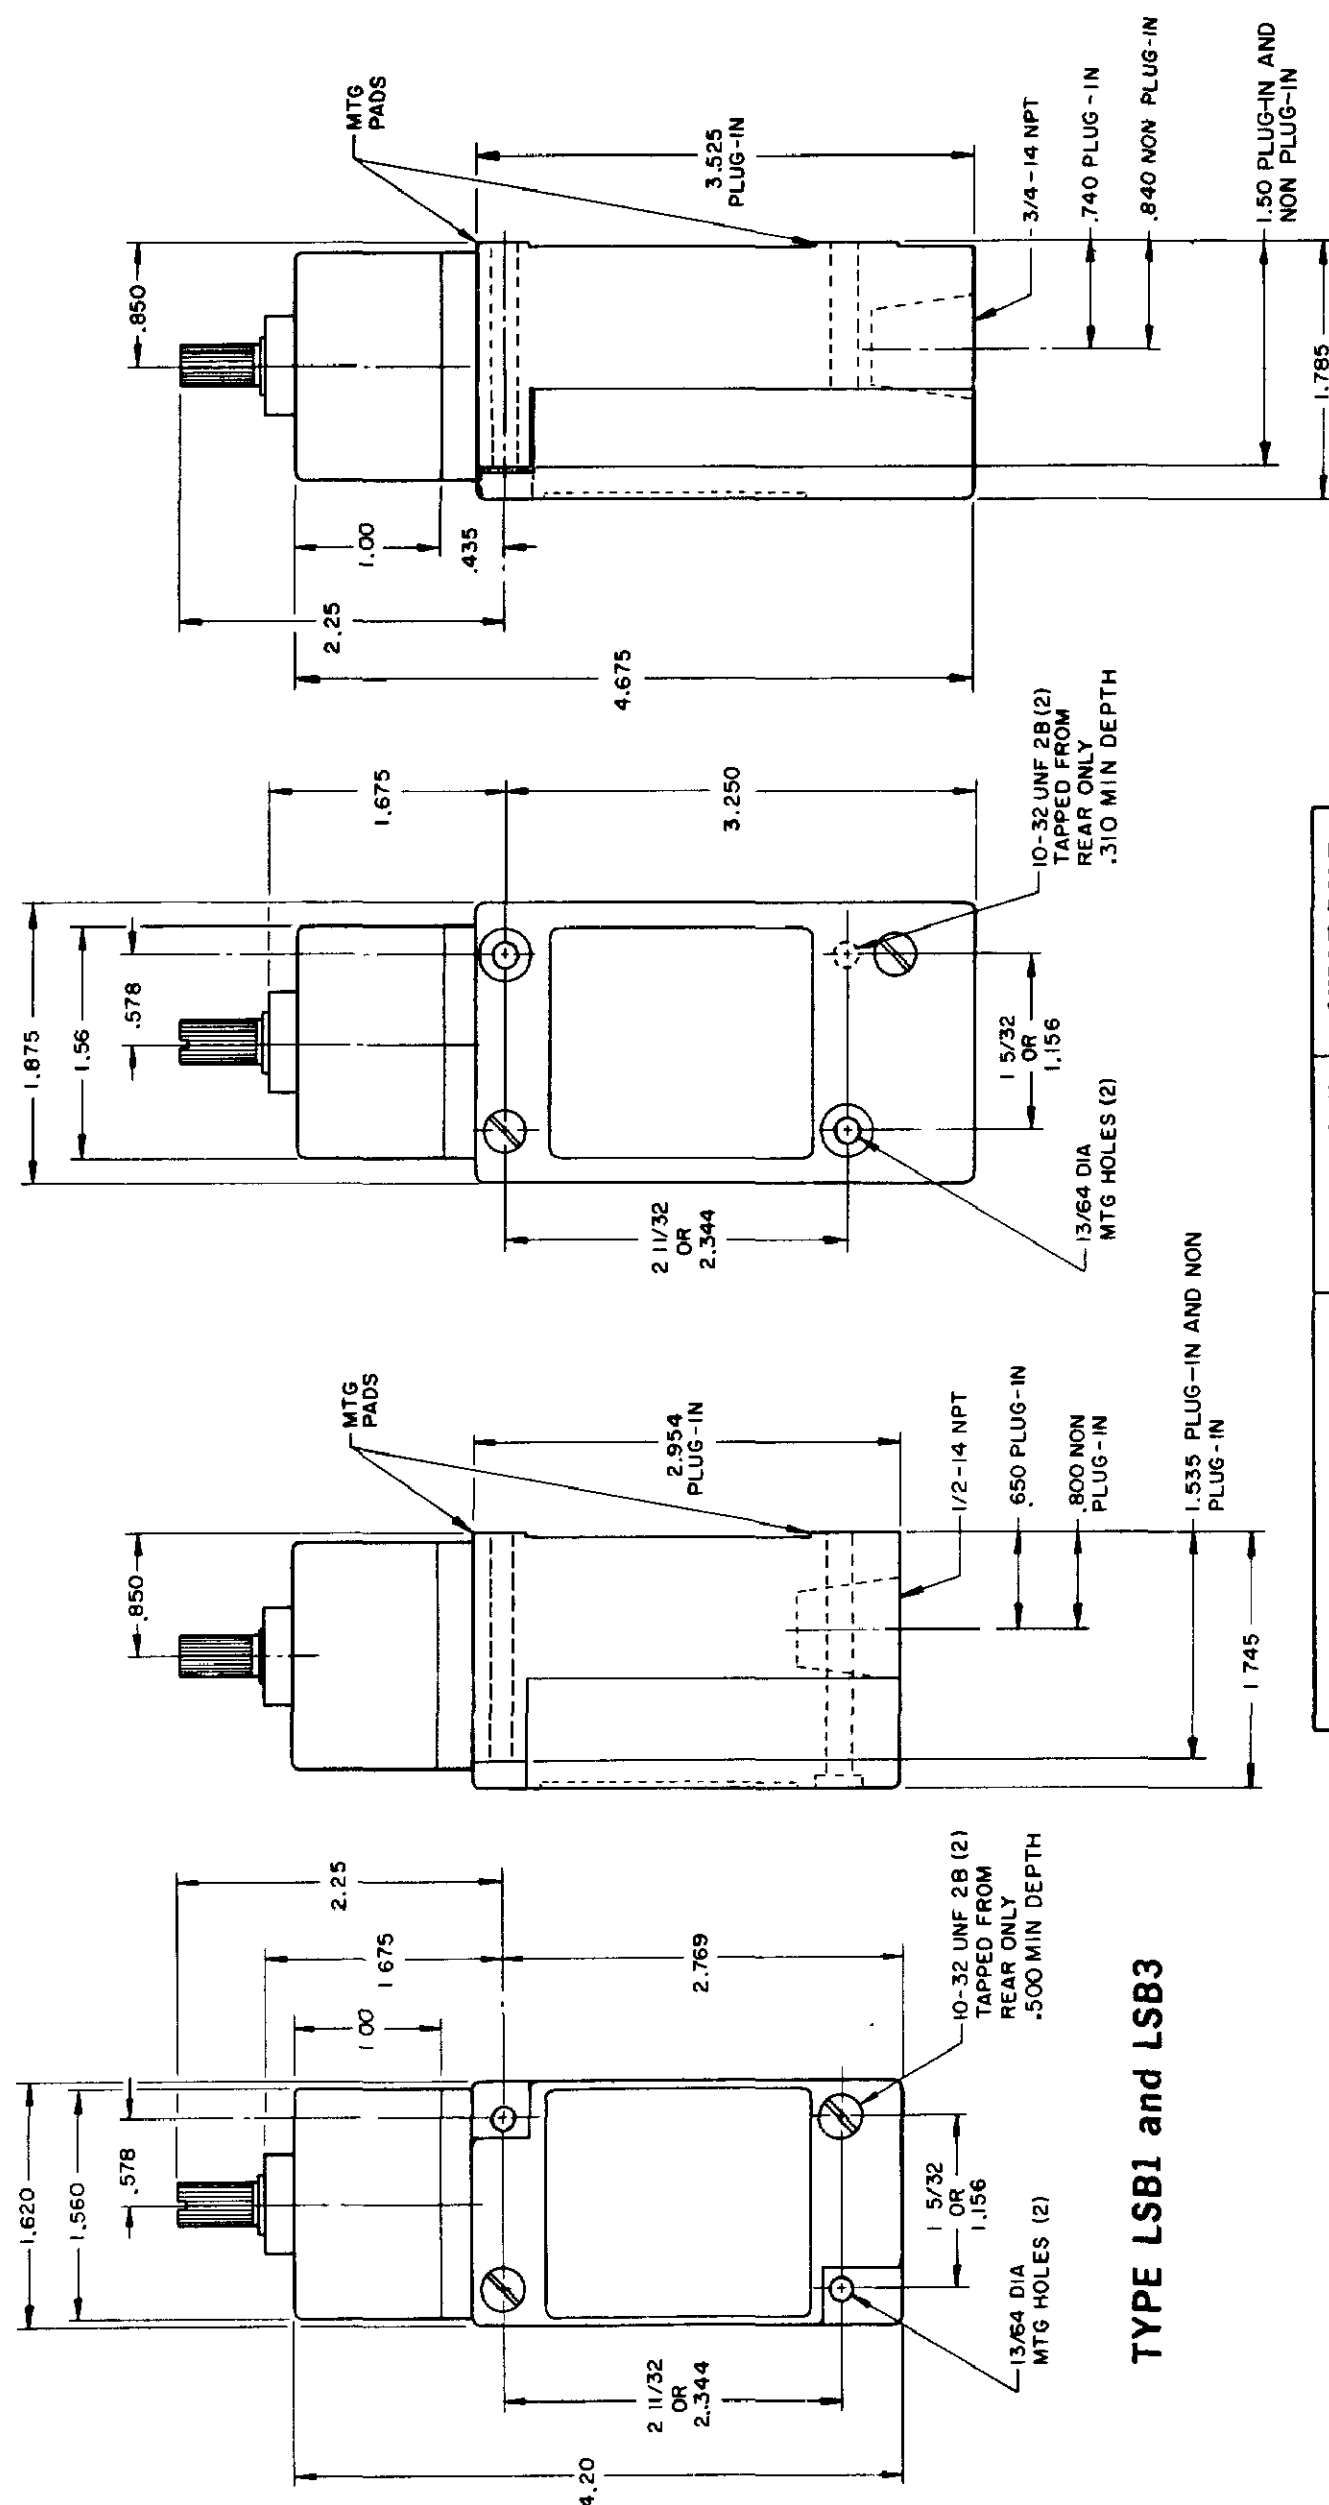

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR			
		SINGL POLE		DOUBLE POLE	
		MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3
	240	30	3	15	1.5
	480	15	1.5	7.5	.75
	600	12	1.2	6	.6

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE

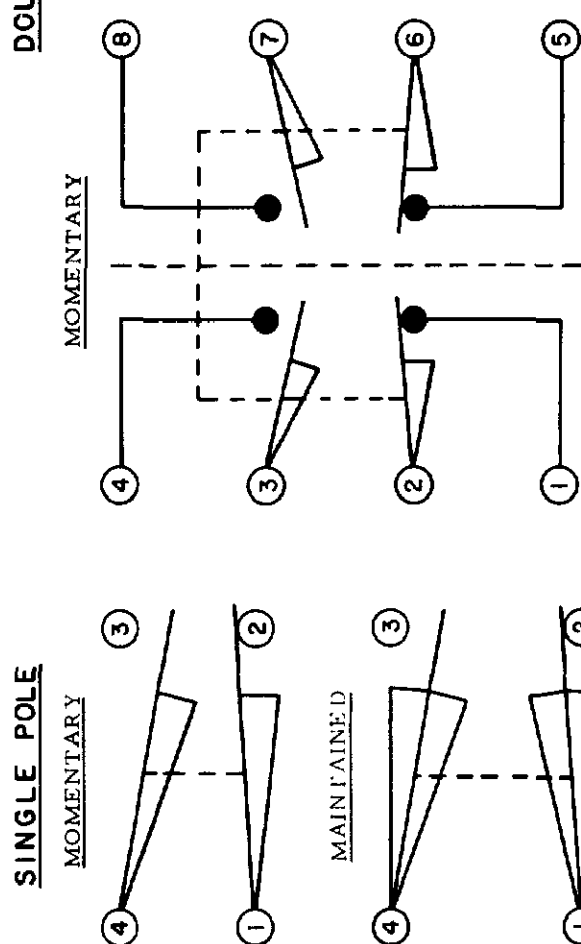

SINGLE POLE

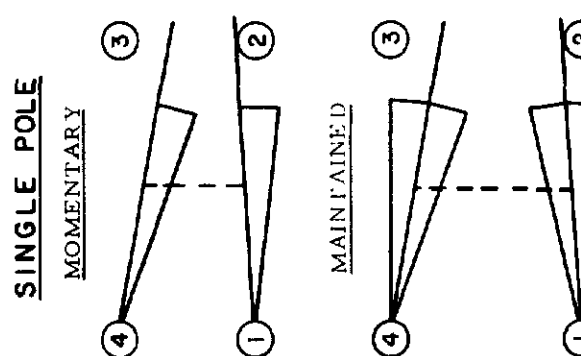


SINGLE POLE

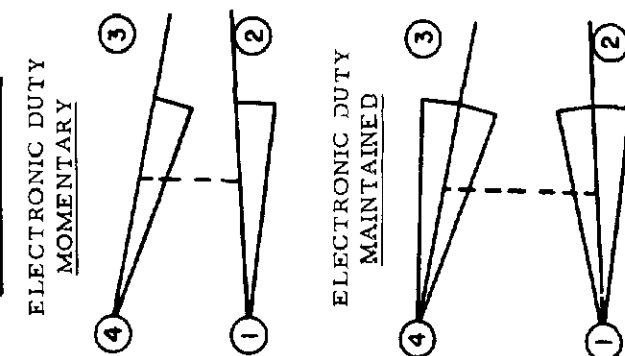

DIRECT ACTING




SINGLE POLE

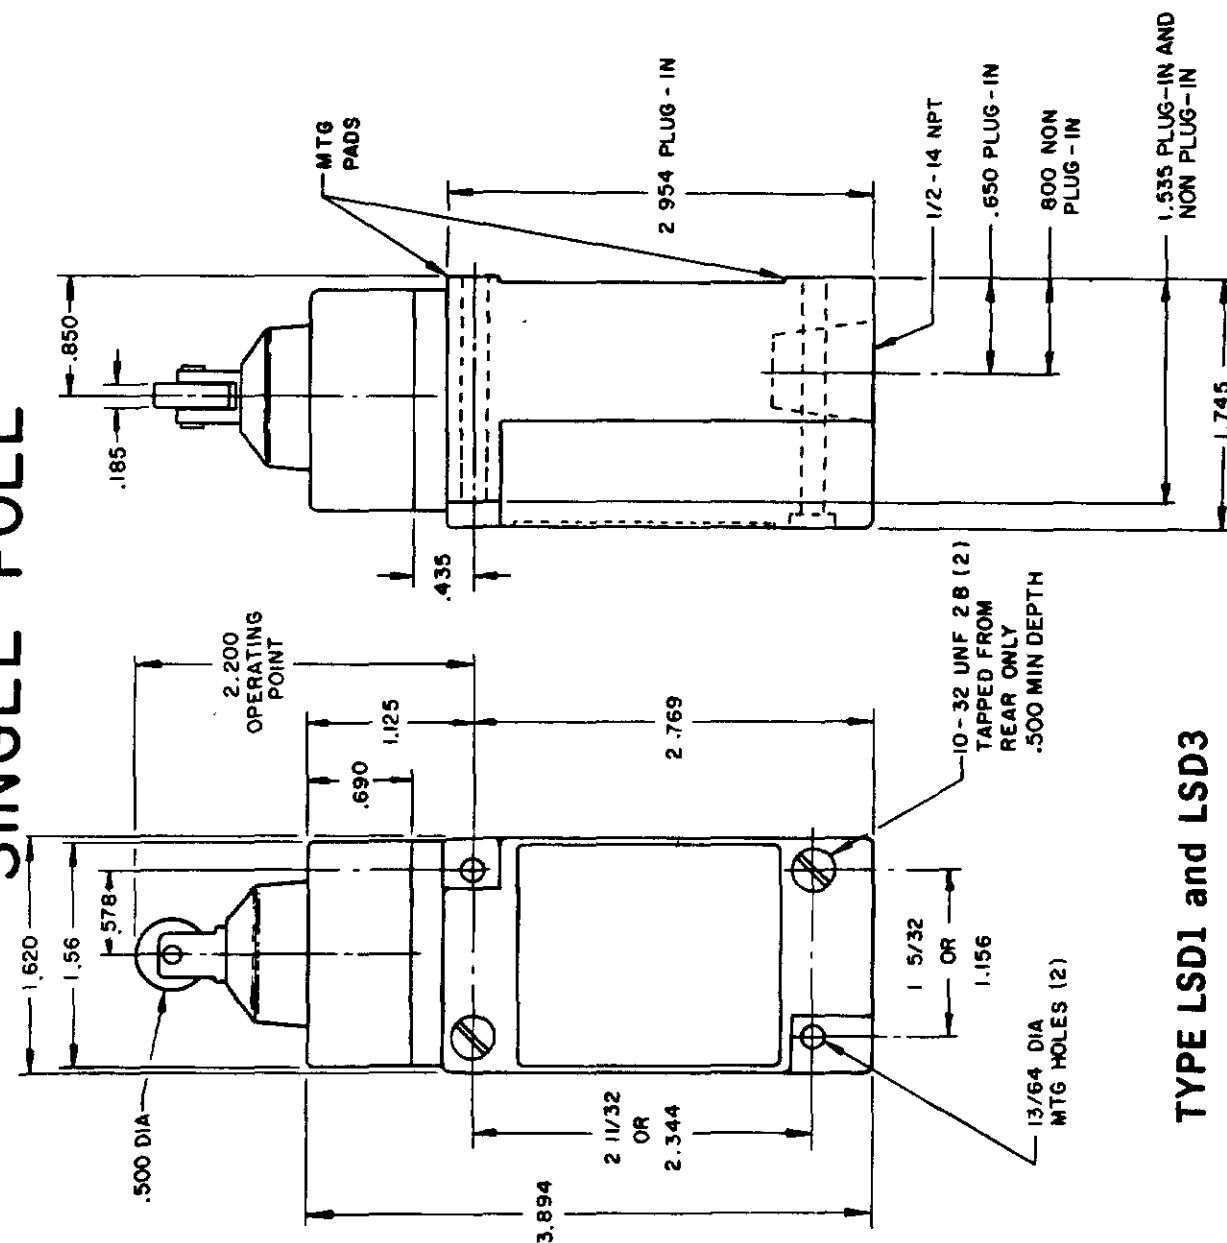


TYPE LSD1 and LSD3

DOUBLE POLE

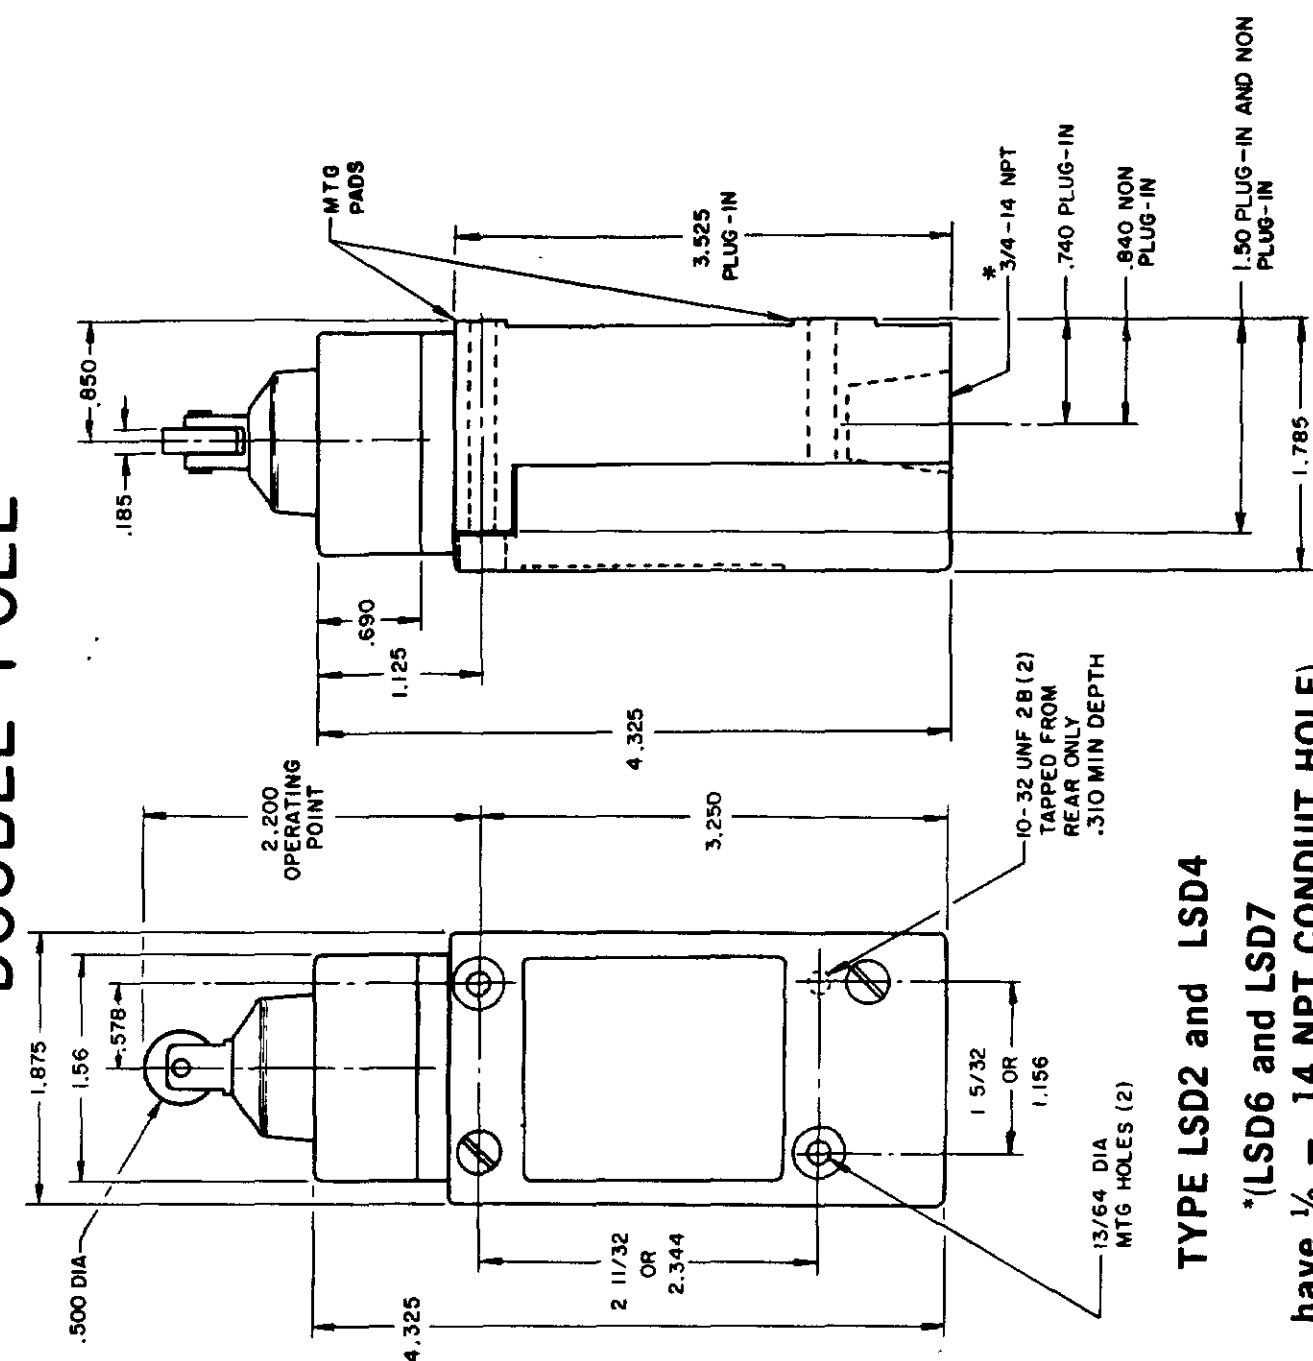


TYPE LSD2 and LSD4


*(LSD6 and LSD7 have 1/2 - 14 NPT CON

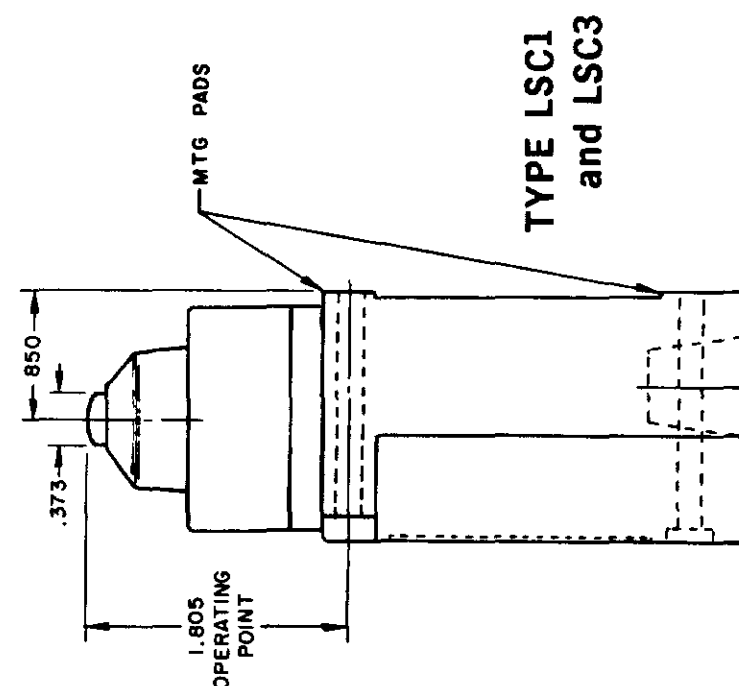

TYPE LSC1 and LSC3

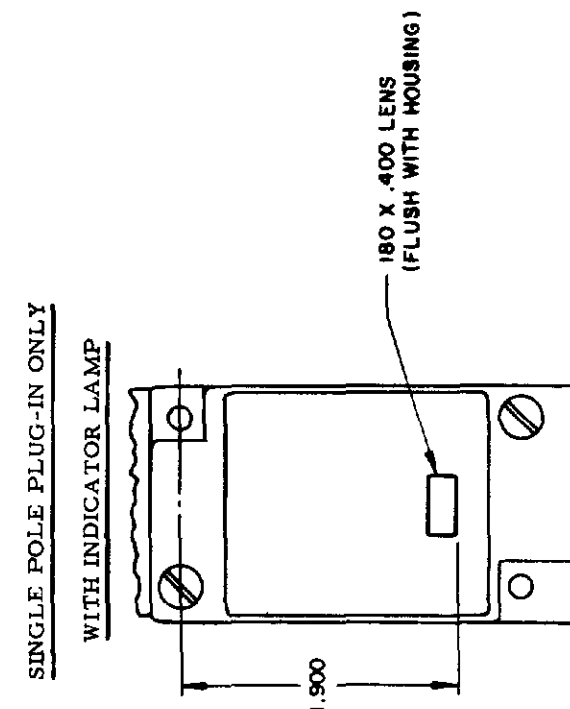


**TYPE LSC2
and LSC4**

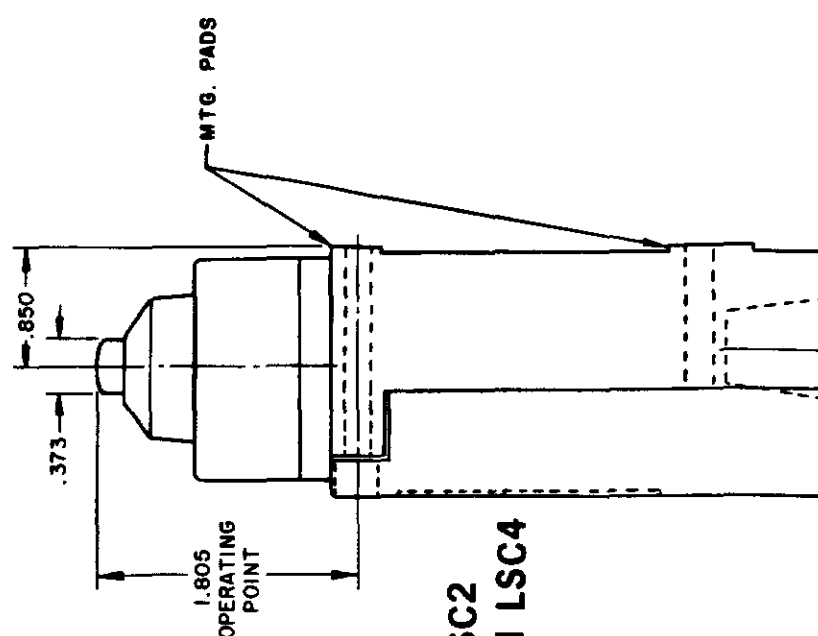


**120 LAMP VOLTAGE -
TYPE LSC5, LSD5 or LSV5**


**240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8**

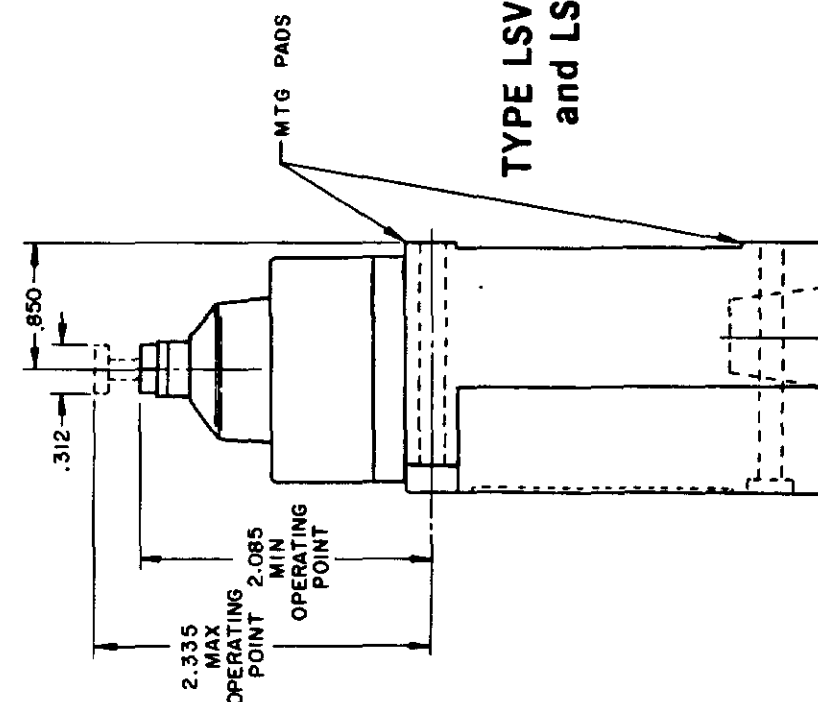

TYPE LSV1 and LSV3

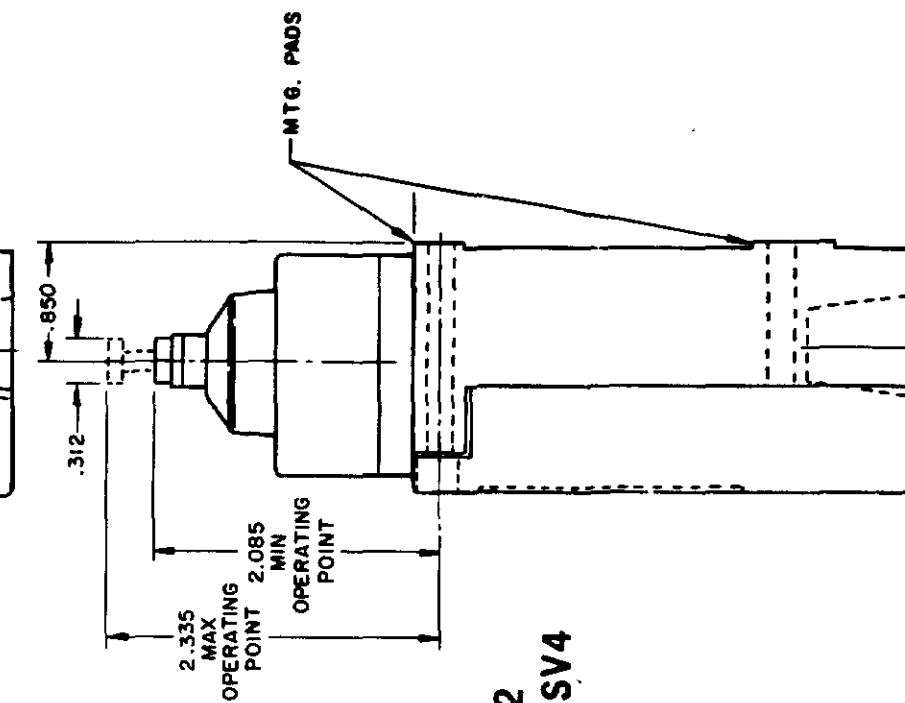

**TYPE LSV2
and LSV4**

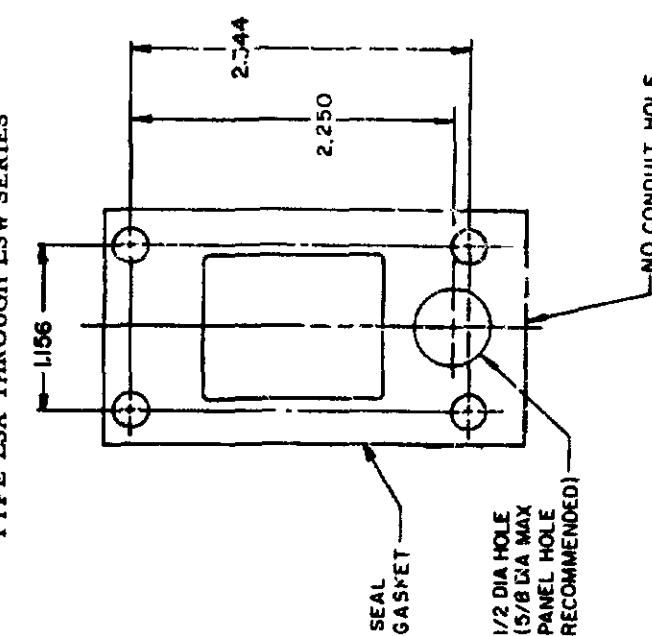

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

LSA-LSW SERIES

CHART 1

SCALE NONE

~~DO NOT SCALE PRINT~~

REV. NO.		
L	0031956	BS
B	10 JUL 97	10 JUL 97
C	201004	10 AUG 00
D	201748	17 NOV 00
E	202198	20 JAN 01
F	204871	14 OCT 02
G	206763	31 OCT 02
H	207179	14 JAN 03
J	207474	18 FEB 03
K	0006871	11 AUG 04

RASTER

DRAWN

MAM 15 JUN 94

CHECK

11 JUL 94

CHECK

11 JUL 94

CHECK

AK

11AUG04

CHECK

PSR

10JUL07

RELEASE NO

CO-78498

REPLACES

LSA-LSW SERIES

ISSUE

12

CATALOG LISTING

LSA-LSW SERIES CHART 1

10JUL07

RELEASE NO

CO-78498


REPLACES

LSA-LSW SERIES


SIDE PLUNGER TYPE

SINGLE POLE

DOUBLE POLE

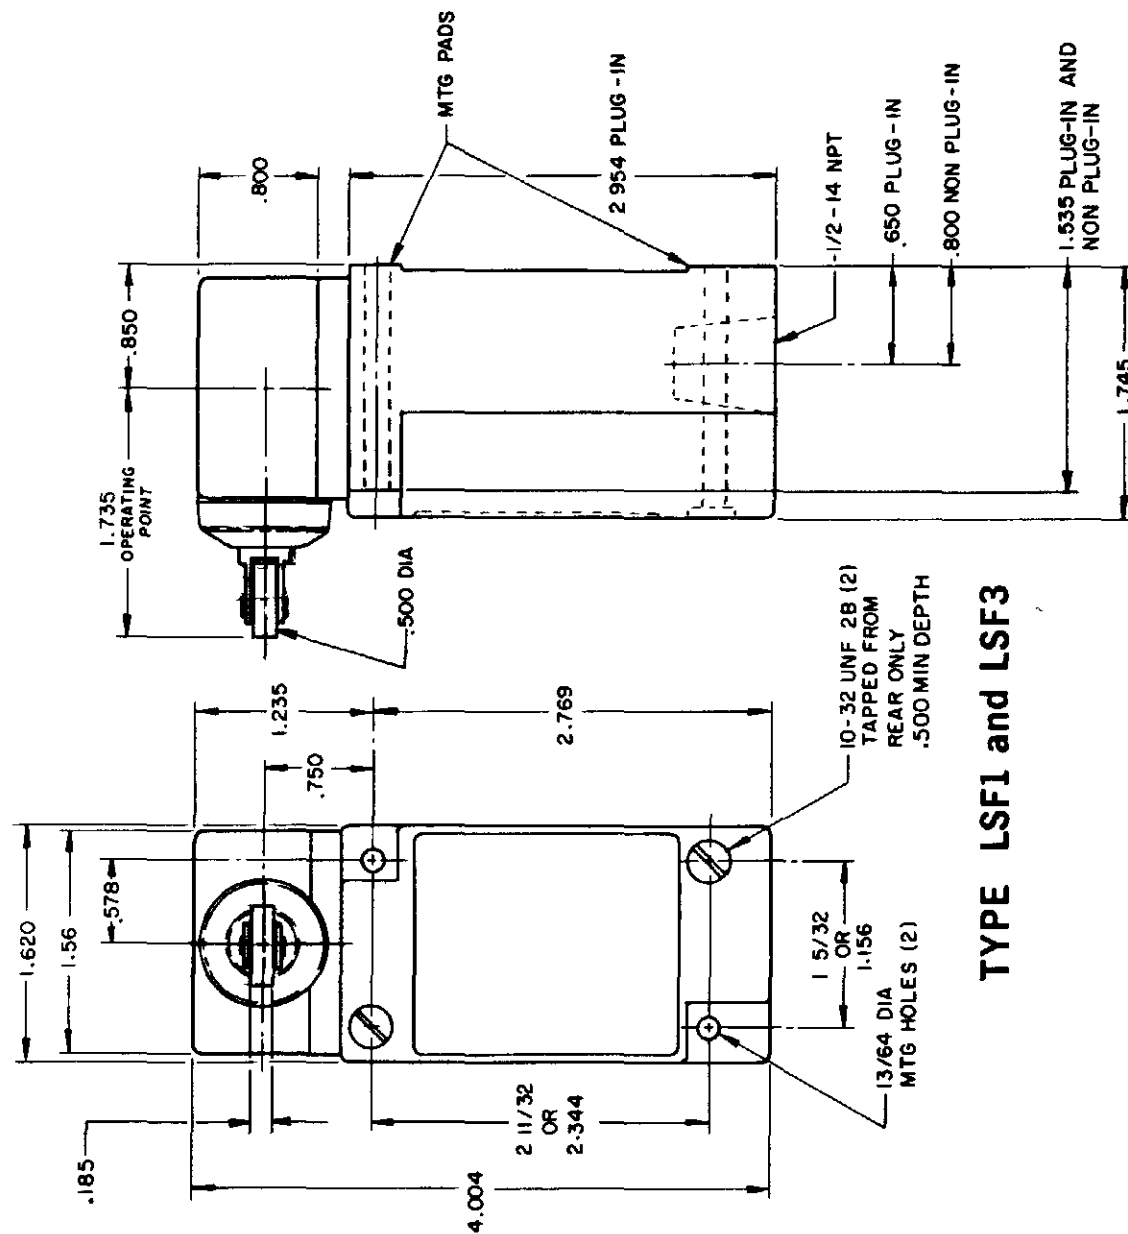


TYPE LSF1 and LSF3

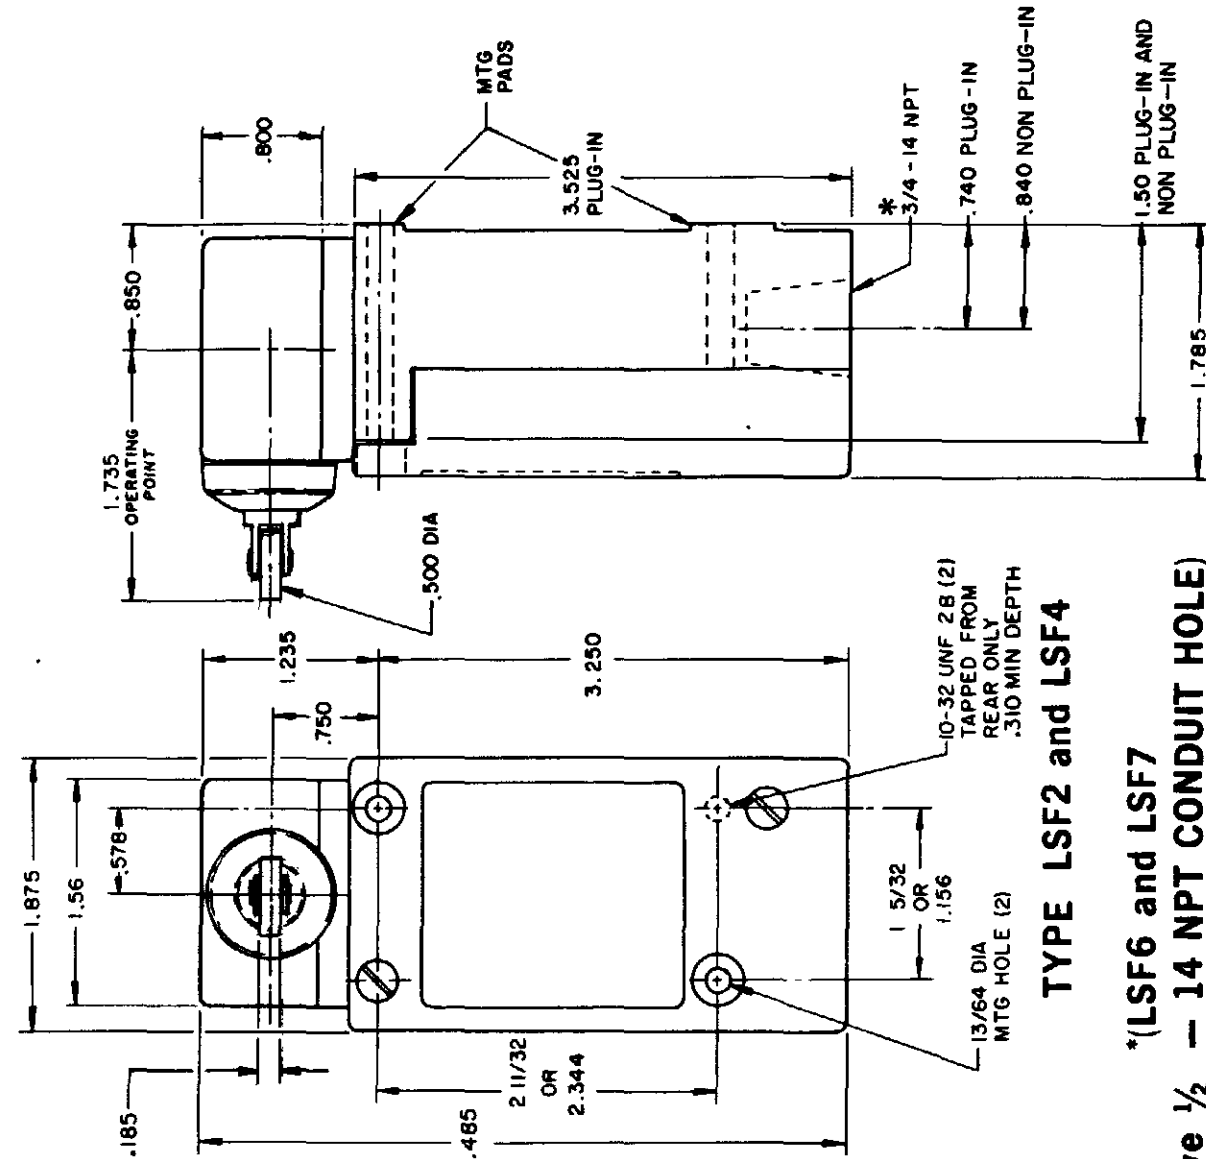


TYPE LSF2 and LSF4

*(LSF6 and LSF7 have 1/2 - 14 NPT CONDUIT HOLE)

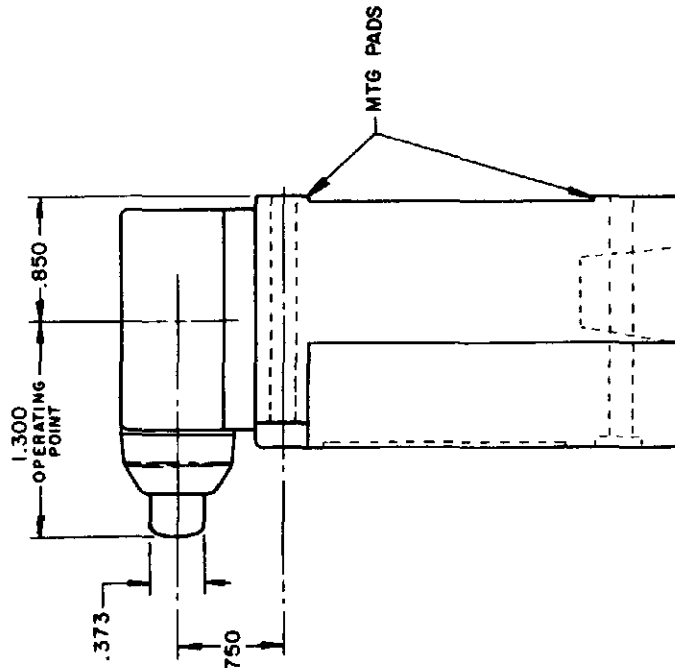


TYPE LSE1 and LSE3

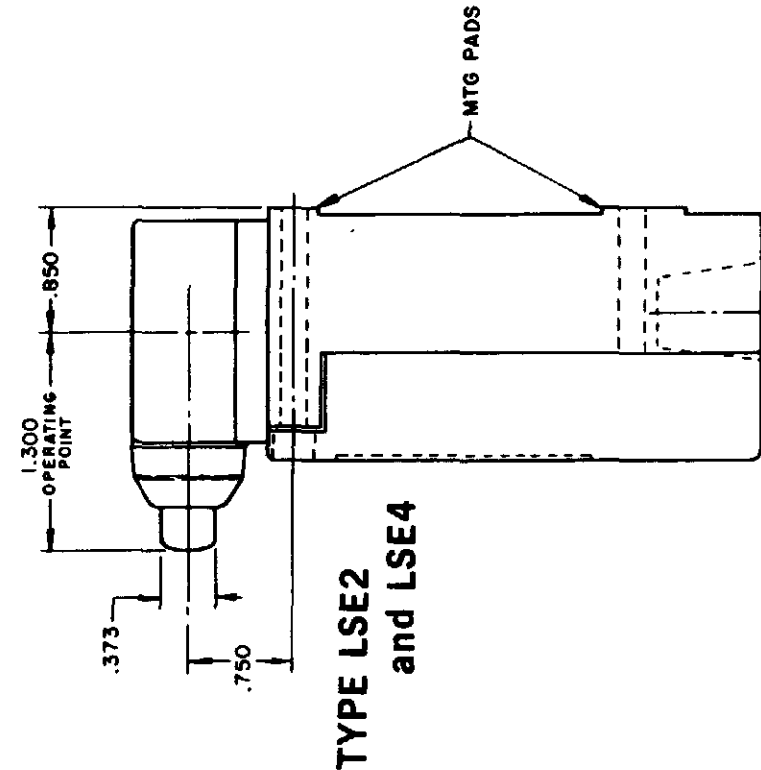


TYPE LSE2 and LSE4

120 LAMP VOLTAGE - TYPE LSF5, LSE5 and LSW5

240 LAMP VOLTAGE - TYPE LSF8, LSE8 and LSW8

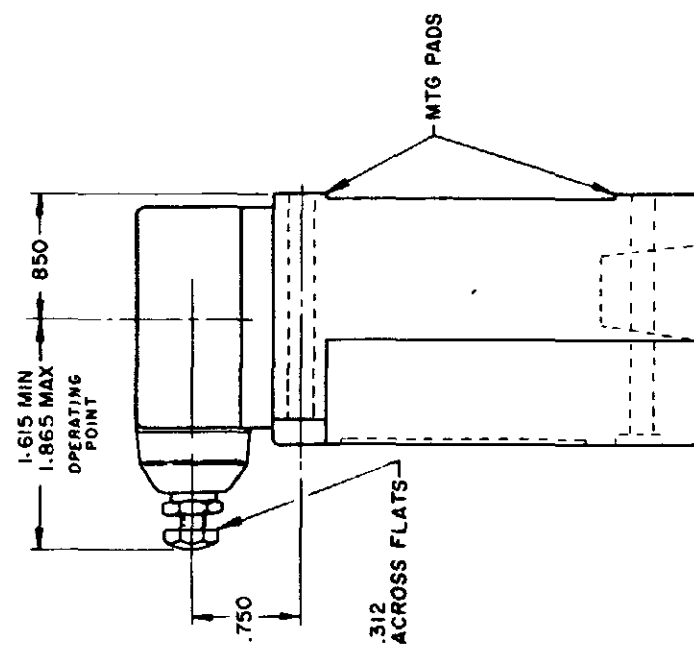


TYPE LSW1 and LSW3

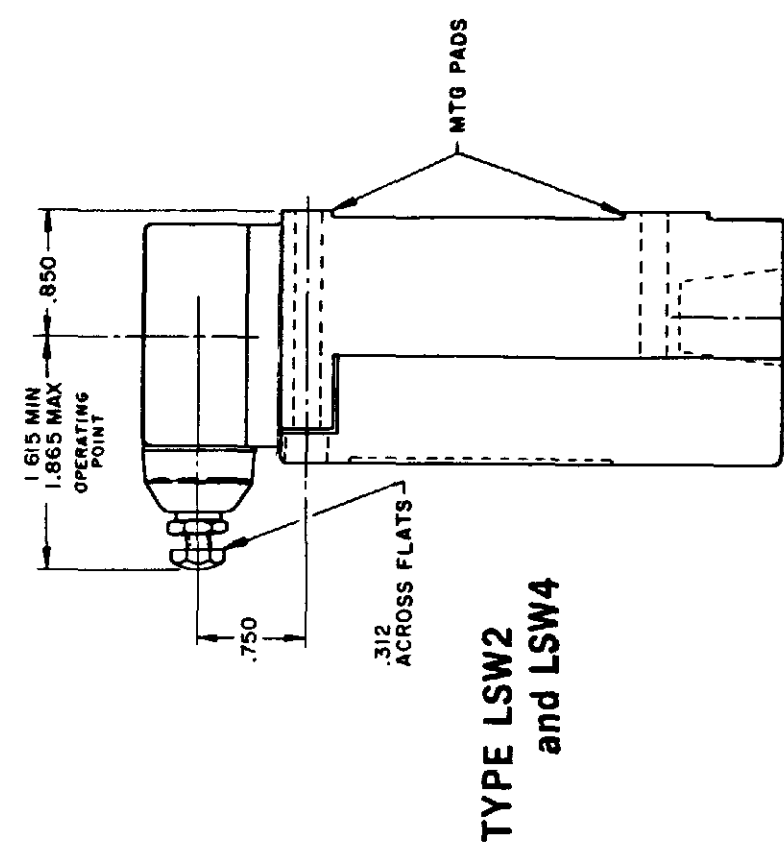

TYPE LSW2 and LSW4

MANIFOLD MOUNT (PLUG-IN ONLY) SINGLE POLE AND DOUBLE POLE TYPE LSA THROUGH LSW SERIES

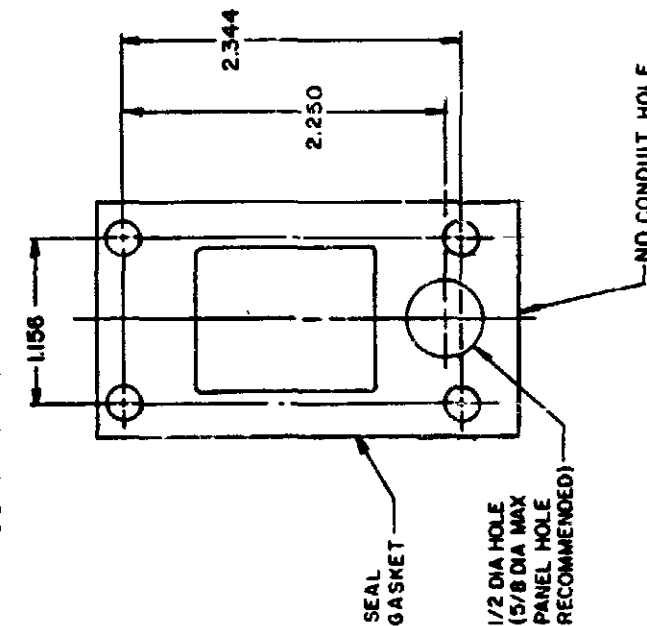

SCALE NONE


DO NOT SCALE PRINT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

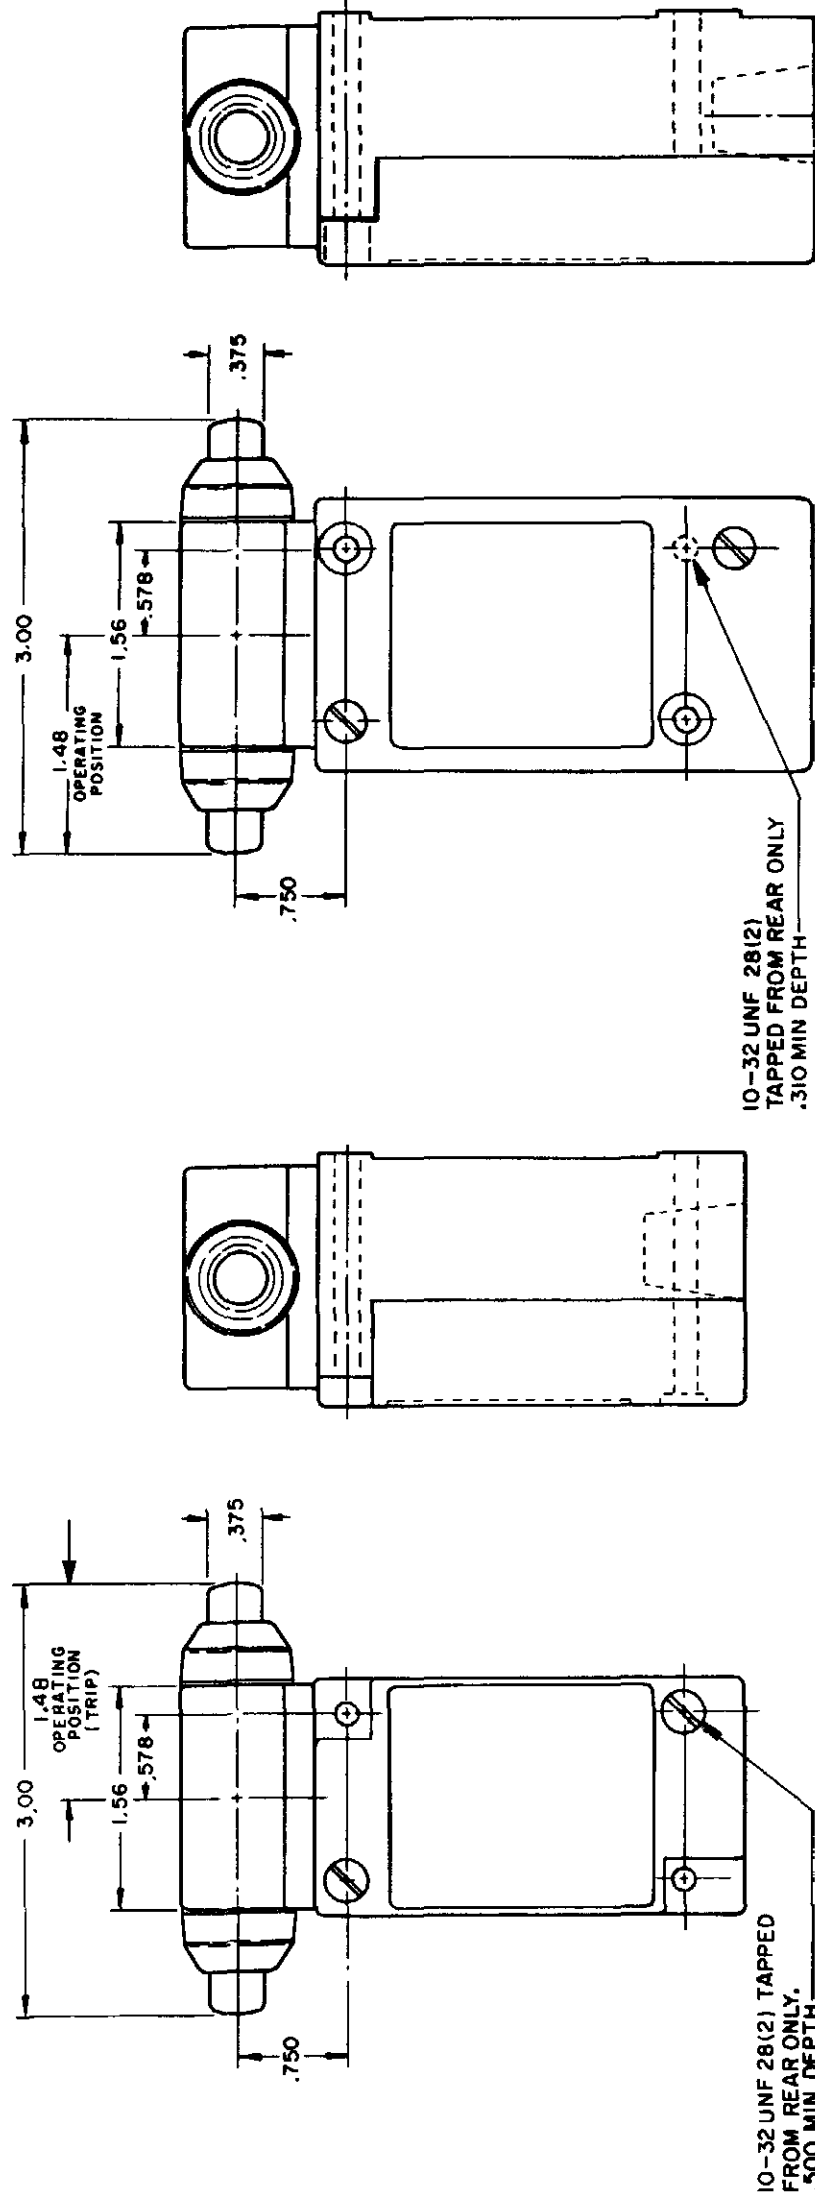

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE


CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC		
				LSC	LSD	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070		
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE DOUBLE POLE .015	SINGLE POLE DOUBLE POLE .020	SINGLE POLE DOUBLE POLE .015	2ND STEP .016 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.015 EACH STEP		
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	.170		
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX		

SIDE PLUNGER TYPES

OPERATING POINT GIVEN IN
RELATION TO CENTER OF HEAD

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	SEQUENCE BASIC		
				LSE	LSF	LSW
PRETRAVEL (MAX)	.100	.100	.170	1ST STEP .100		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.090	2ND STEP .020 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.080	.025 EACH STEP		
OPERATING FORCE (MAX)	6 LBS	6 LBS	10 LBS	.170		
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN 1.865 MAX	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	10 LBS	1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		

WOBBLE STICK
SINGLE POLE
DOUBLE POLE

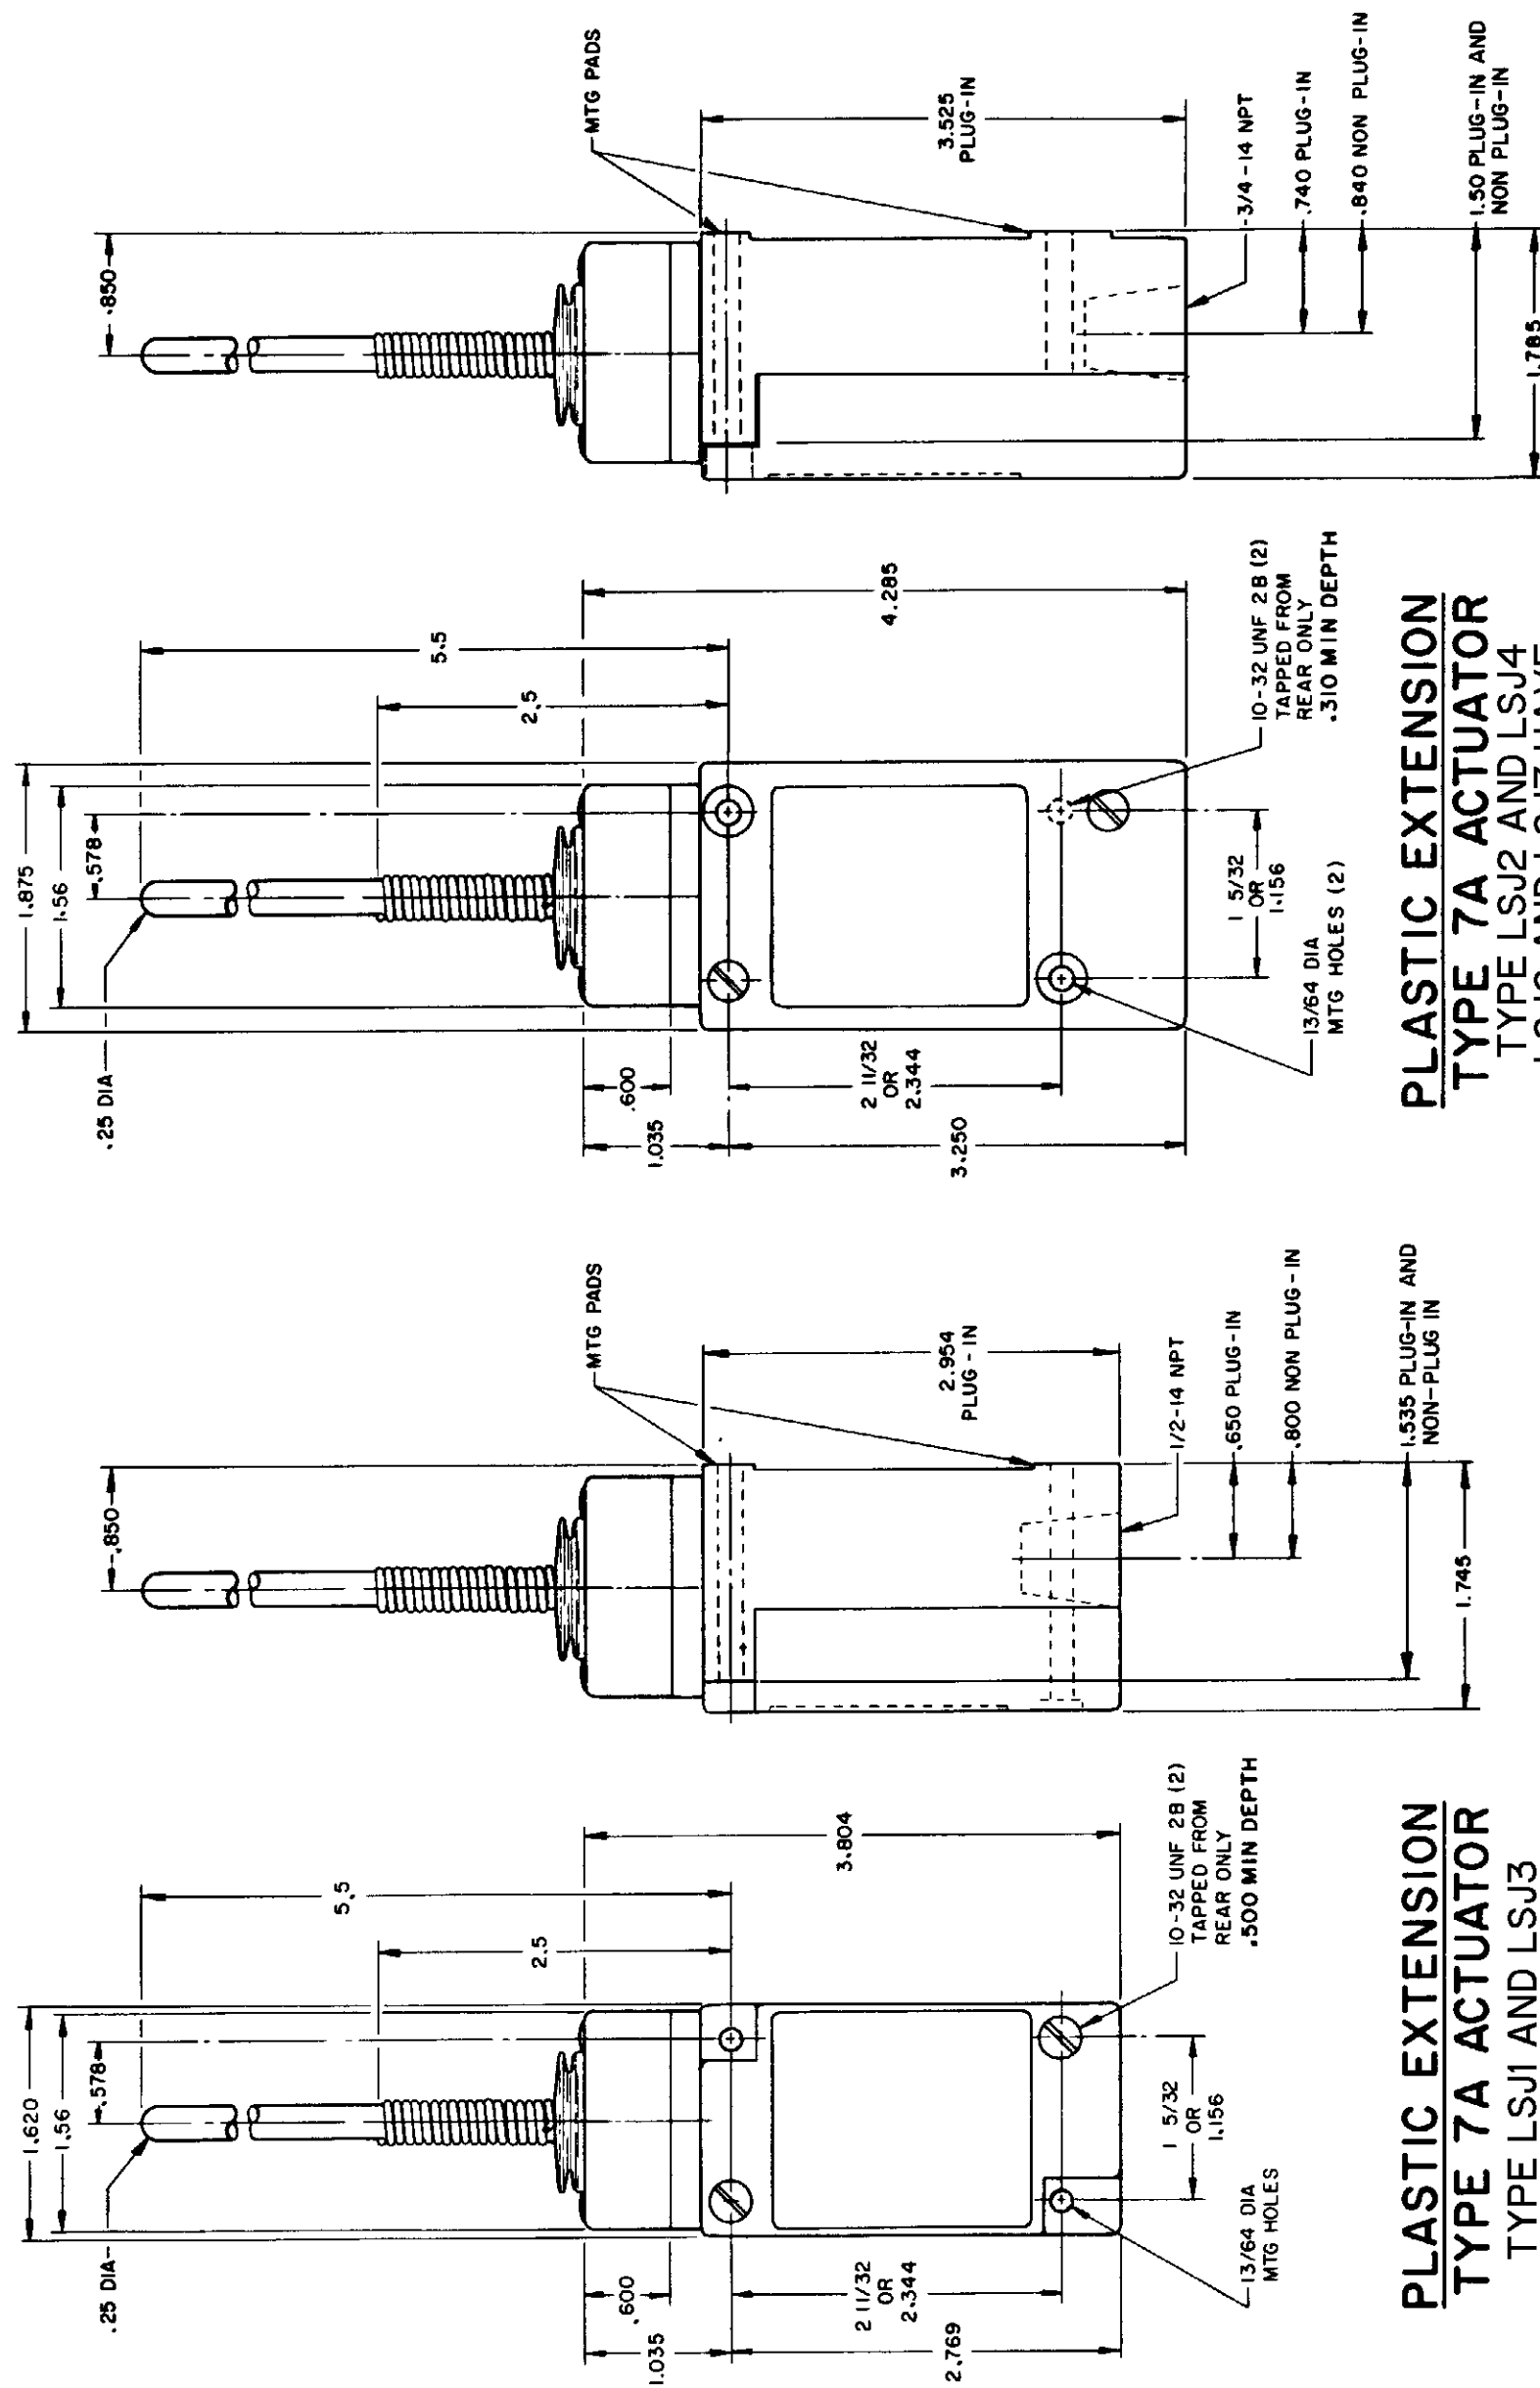

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

MICRO SWITCH
Honeywell Division

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED


LSA-LSW SERIES
CHART 1

CATALOG LISTING


PAGE 7 OF 10

SCALE NONE
DO NOT SCALE PRINT


REPLACEMENT ACTUATOR
LSZ-4009

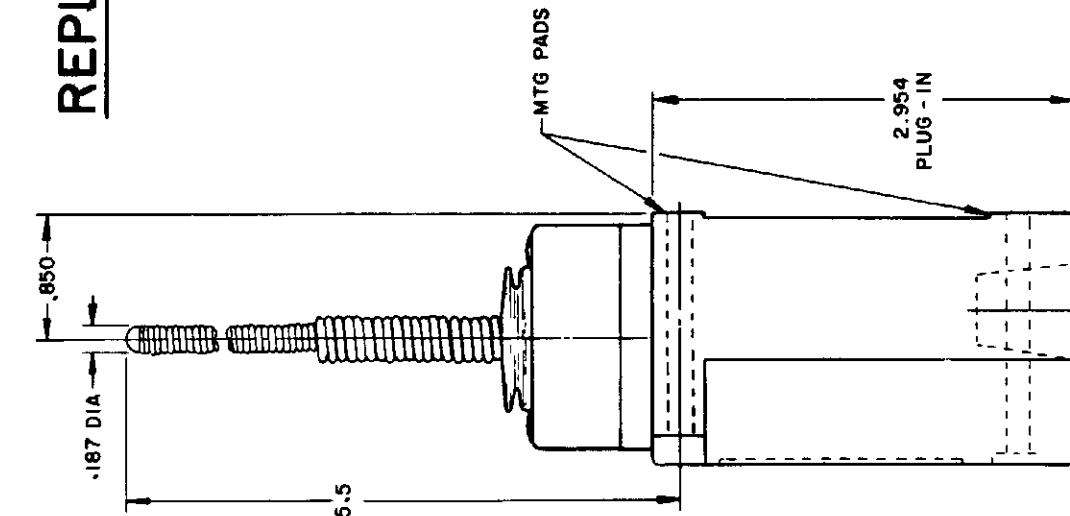

CABLE EXTENSION
TYPE 7N ACTUATOR

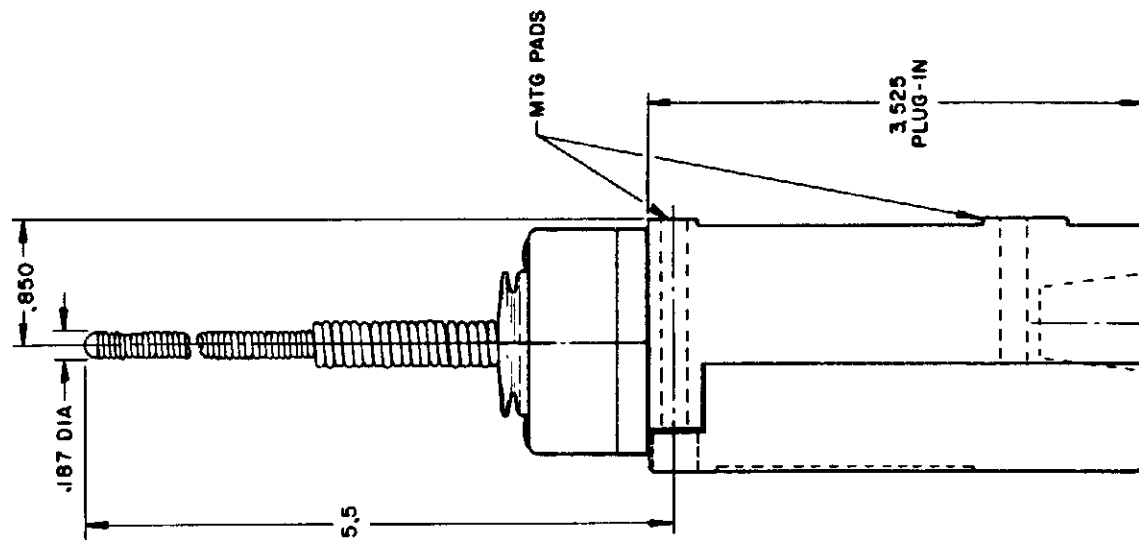

CABLE EXTENSION
TYPE 7 N ACTUATOR

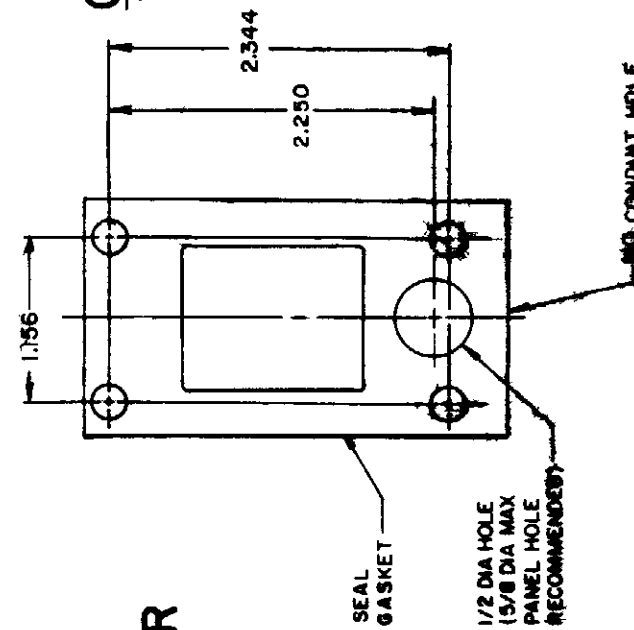


REPLACEMENT ACTUATOR
LSZ-40II


1120 LAMP VOLTAGE TYPE LSJ5
2240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP


180 X 400 LENS
(FLUSH WITH
HOUSING)

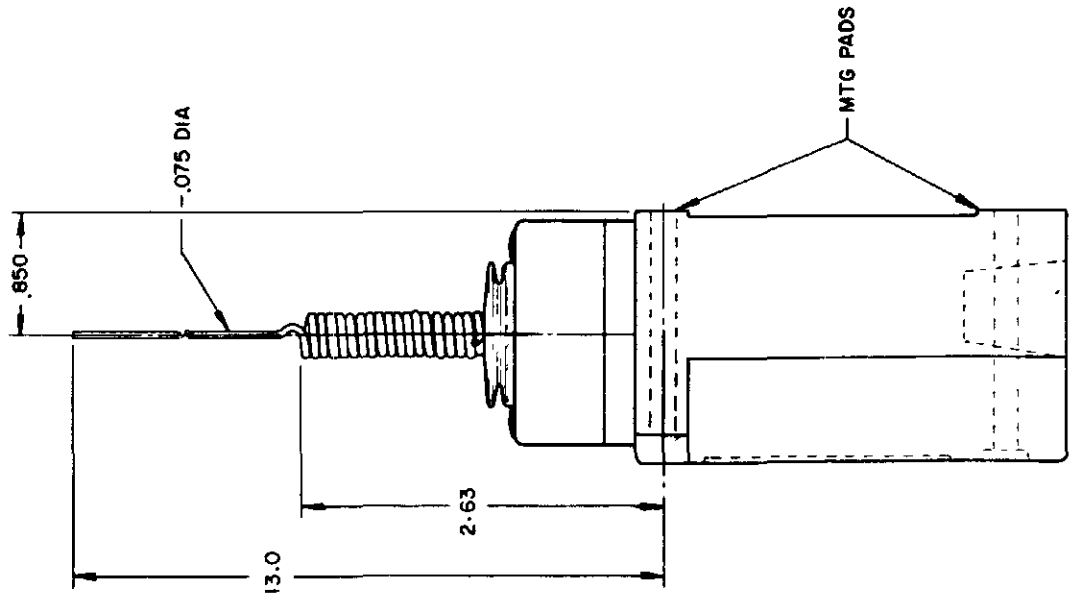

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

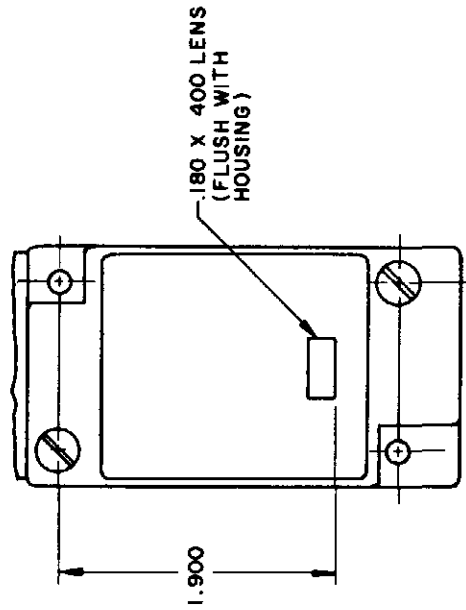

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

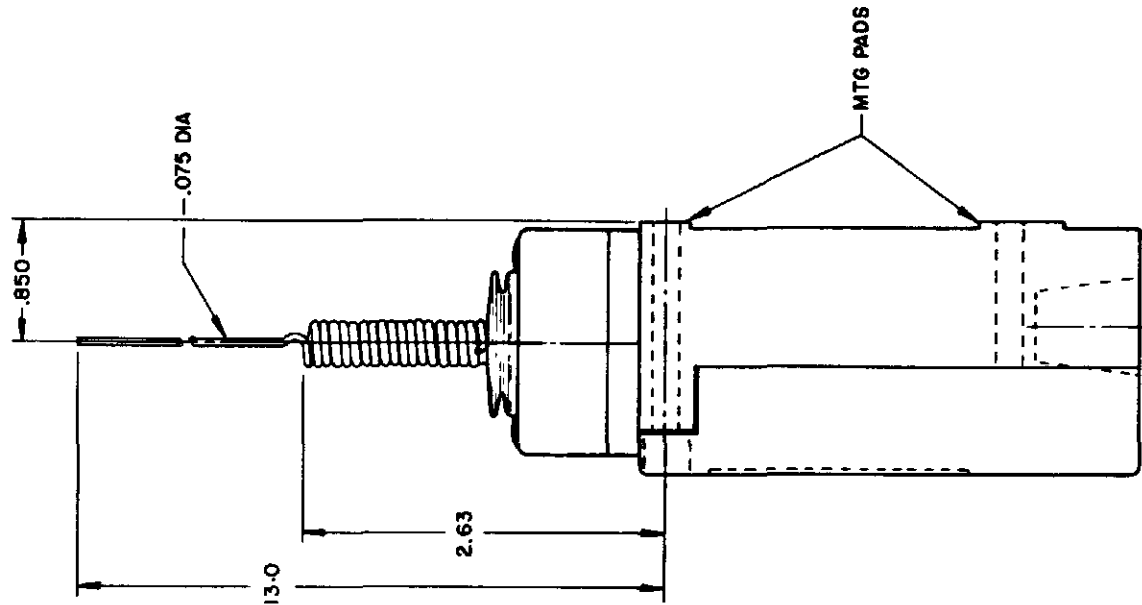

WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ1 and LSJ3

WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE

REPLACEMENT ACTUATOR - LSZ 4010


CAT WHISKER

SINGLE POLE

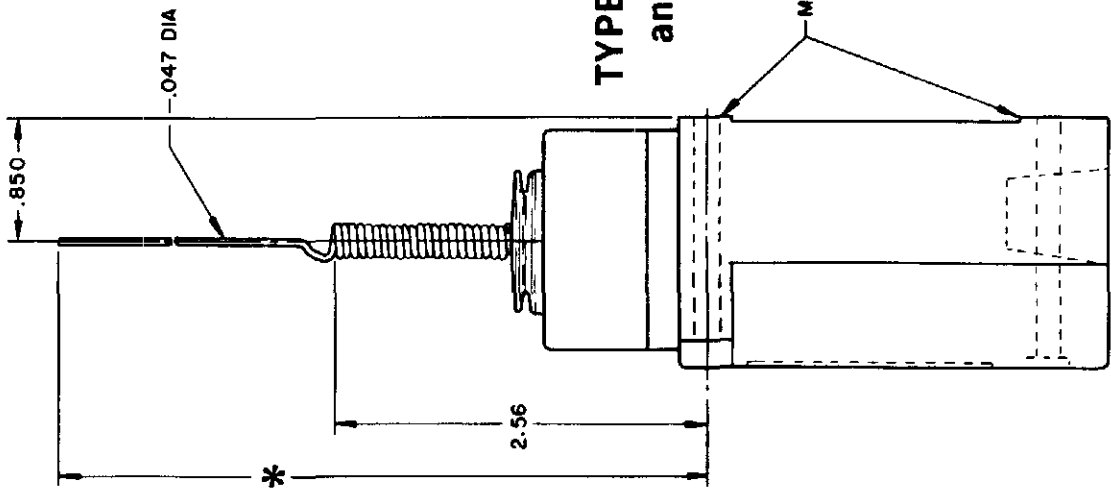

TYPE LSK1
and LSK3

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

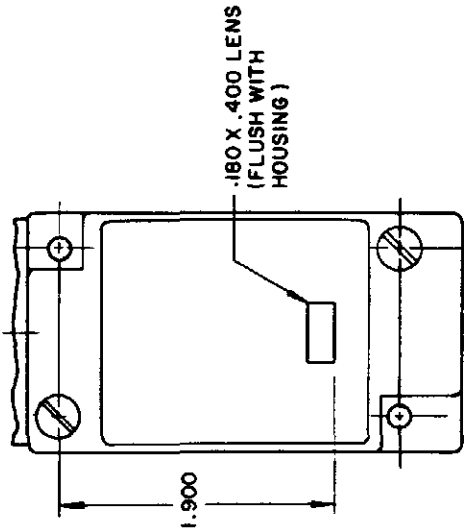


120 LAMP VOLTAGE

TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY

240 LAMP VOLTAGE

TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

DOUBLE POLE

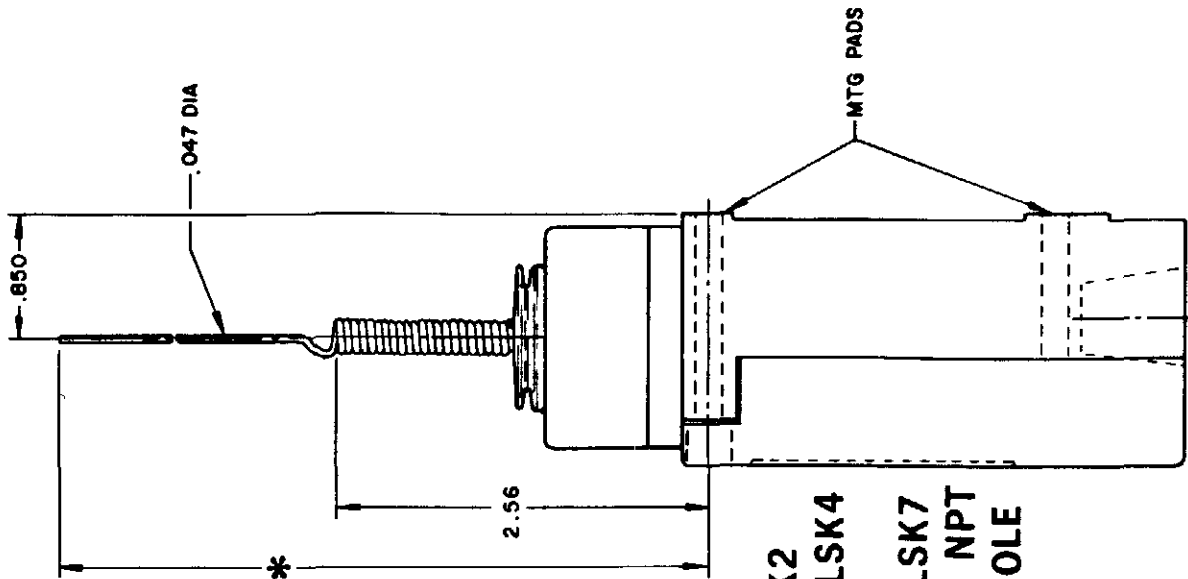

TYPE LSK2
and LSK4

LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

* WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ 4036

WIRE EXTENSION

* TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

PAGE 8 OF 10

SCALE NONE
DO NOT SCALE PRINT

CAT. WHISKER COIL	WOBBLER STICK	
	5/16" WIRE	7/16" WIRE
2	2	4.5
7.0	5.0	3.0
10.0	7.0	5.0

REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL07			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871


ISSUE	CATALOG LISTING	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
M	LSA-LSW SERIES CHART 1	PAGE 9 OF 10						

RASTER
DRAWN

CONVERSION BASES


SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ4004

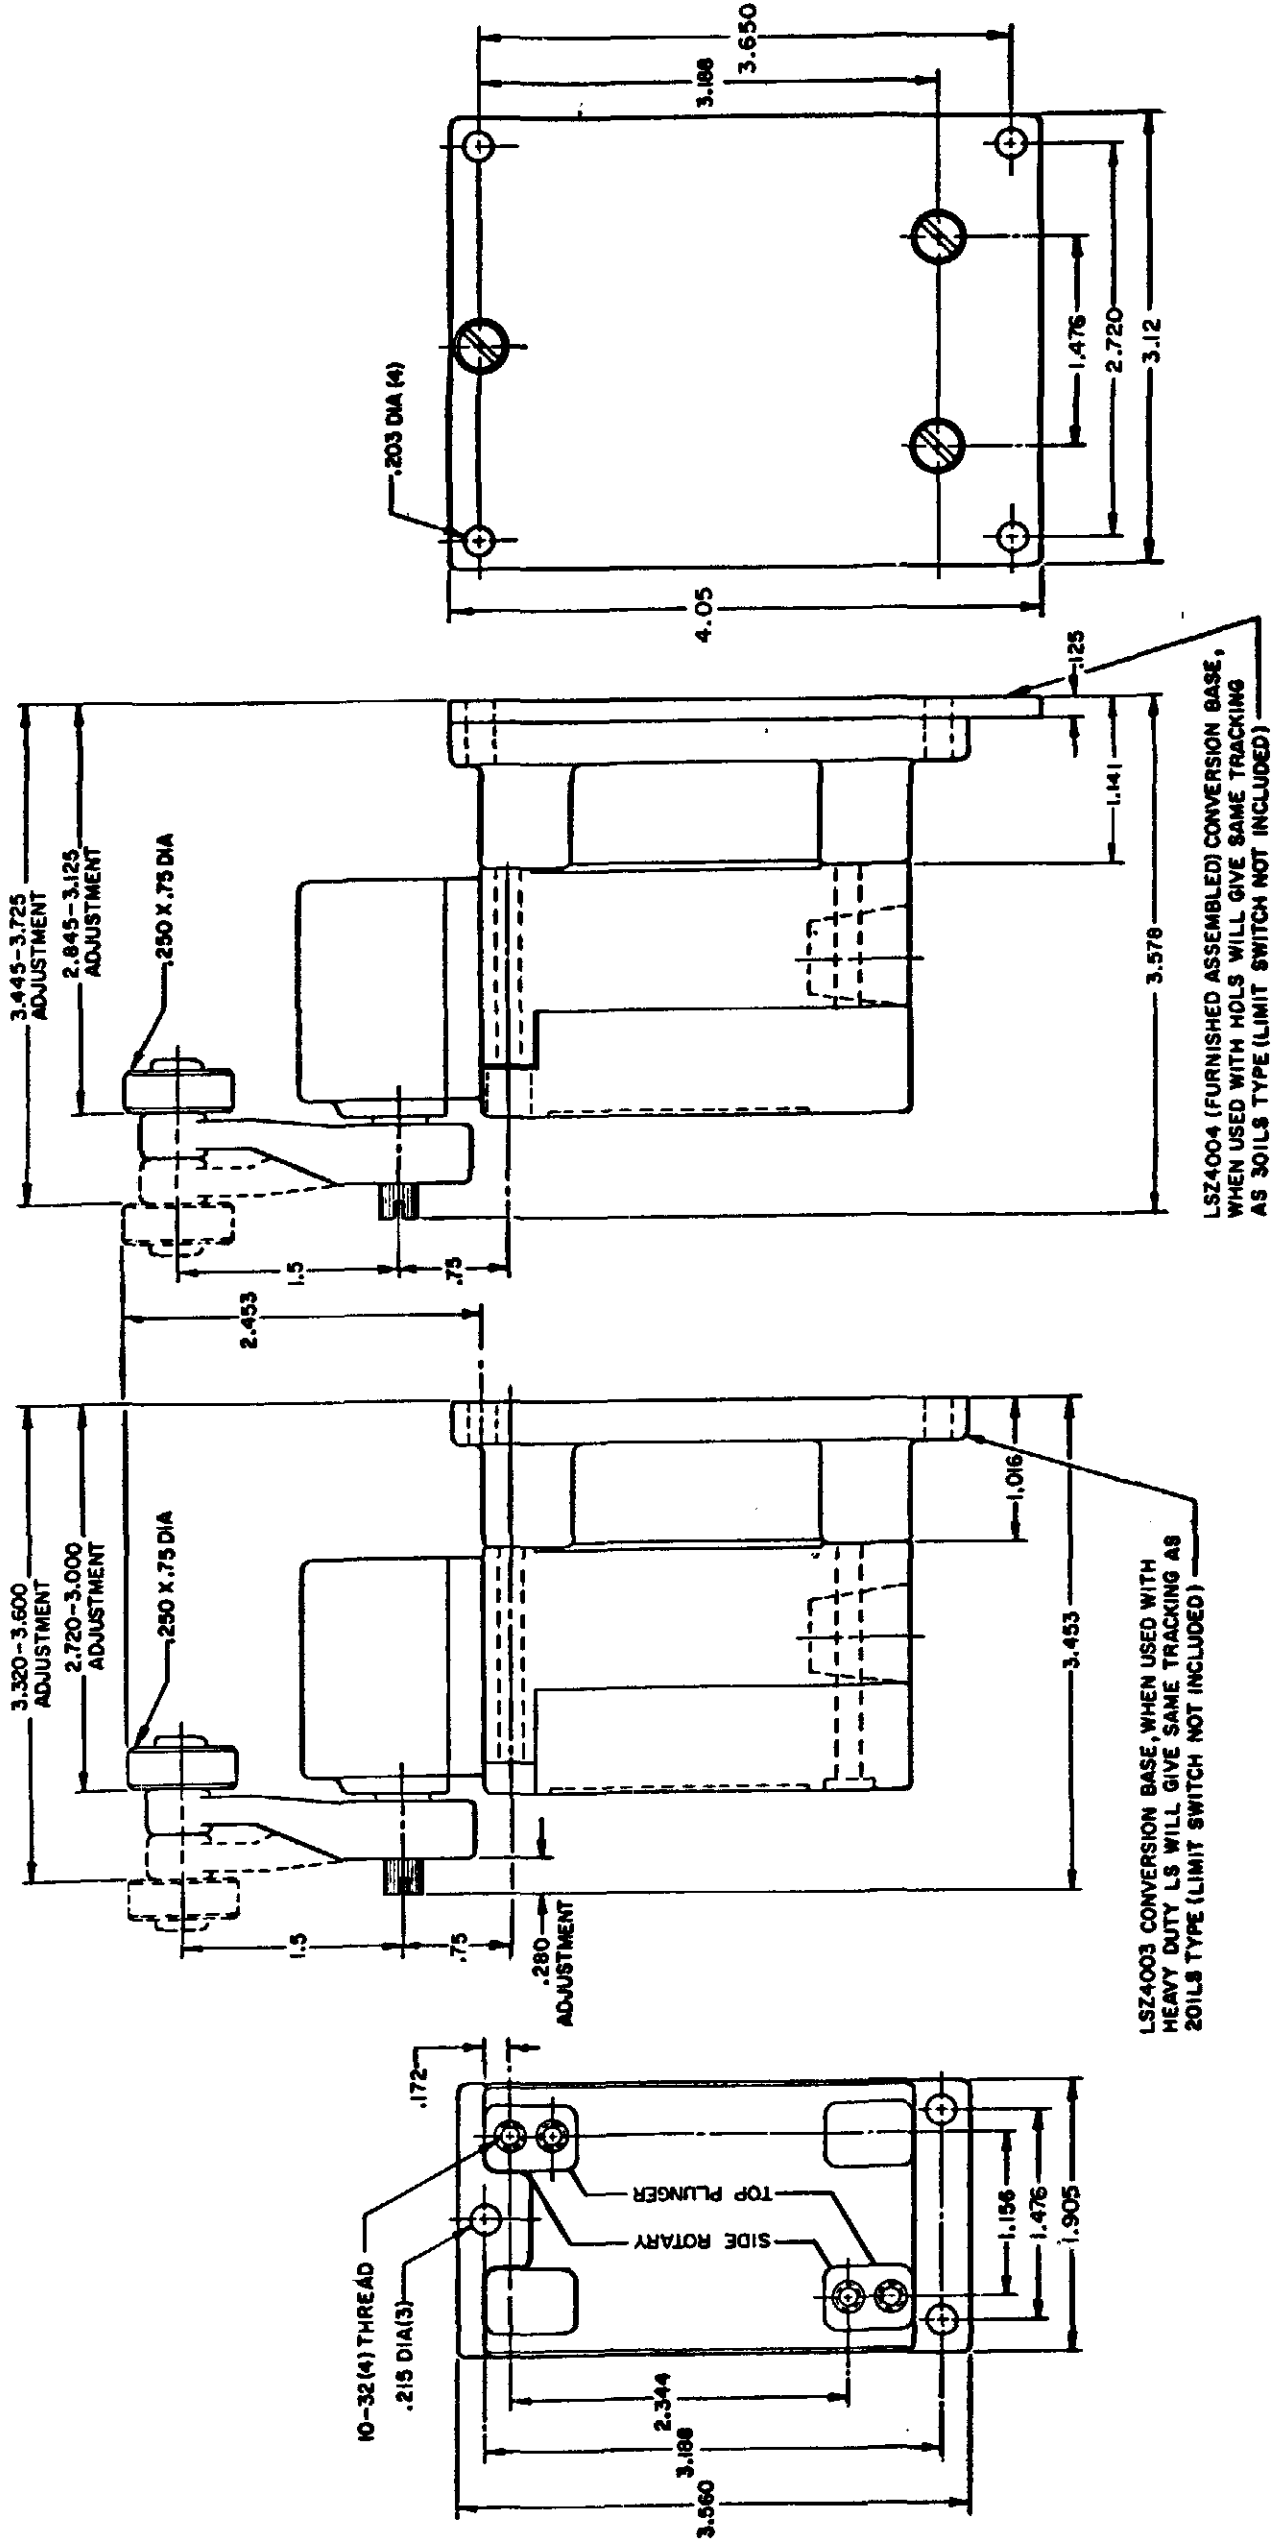

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE
TOP PLUNGER
LSZ4003

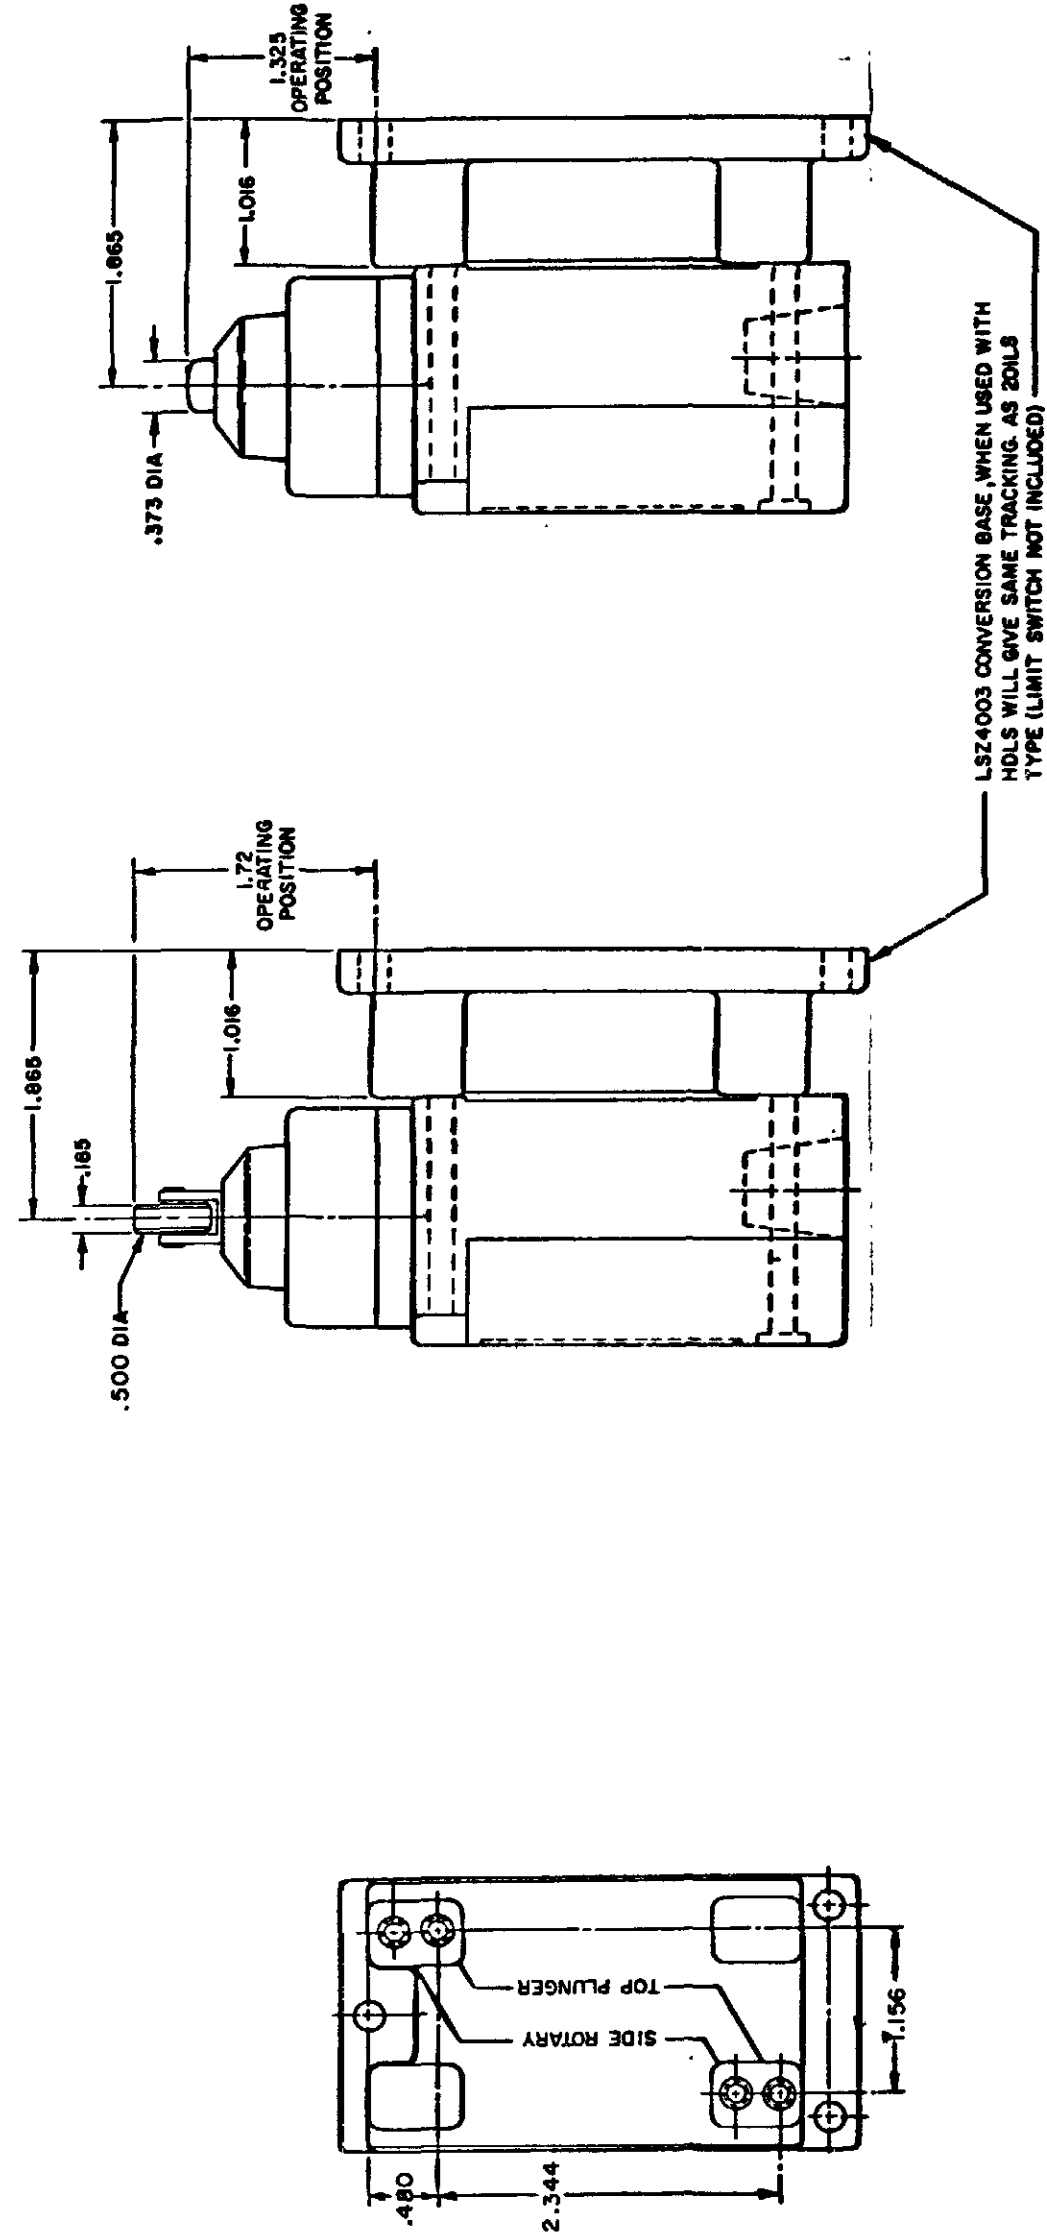

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF
LIMIT SWITCH

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

SCALE



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331