

For More Information

The complete schematic and user's guide for the PICDEM PIC18 Explorer Board, as well as the data sheet for the PIC18F66K80 family of microcontrollers are available on the Microchip web site: <http://www.microchip.com/PIC18K>

PIC18F66K80 Plug-in Module for PICDEM™ PIC18 Explorer Board

Overview

The PIC18F66K80 Plug-in Module (PIM) is an accessory to the PICDEM™ PIC18 Explorer Board that allows users to easily experiment with the PIC18F66K80 family of microcontrollers. PIC18F66K80 is the superset member of the family and this PIM can be used to evaluate and develop with the PIC18F66K80 products. The PIM takes the place of the on-board PIC18F8722 device. This enables users to quickly evaluate the new PIC18FK Flash devices without having to buy a completely new demo board.

Getting Started with the PIM

1. Make sure the on-board PIC18F66K80 is programmed to allow the MCLR Reset pin to function as a Reset pin. If the MCLR is configured to be used for general purpose I/O, the on-board PIC18F66K80 may interfere with PIM usage, even when the board is switched to ICE mode.
2. Verify that the PICDEM PIC18 Explorer Board is not powered.
3. Set switch, S4, to the "ICE" position. This will hold the on-board PIC18F8722 in Reset, allowing the PIM to function instead.
4. Line up the PIM so its 3-pin female header aligns with the 3-pin riser on the PICDEM PIC18 Explorer Board, then plug the PIM into the demo board.
5. Apply power to the demo board. Be sure that VDD is correct for the device being used (5V for PIC18F66K80). If it is not correct, disconnect power and check that the 3-pin female header is aligned properly with the demo board's 3-pin riser.

Changes to PICDEM PIC18 Explorer Board Configuration

The difference of available I/O pins between the PICDEM PIC18 Explorer Board's PIC18F8722 device and the PIM's PIC18F66K80 device causes some changes in the operation of the PICDEM PIC18 Explorer Board.

1. Most I/O lines connected to the PICDEM PIC18 Explorer Board's PICtail™ connector, J3/J5/J7/J11 silkscreen, will map 1:1 with PIC18F66K80 I/O pins.
2. The UART pinout is different on the PIC18F66K80 compared to other PIC18 devices. In order to use serial communication through the serial port on the PIC18 Explorer Board, pin, RG0, must be connected to RC7 and pin, RG1, must be connected to RC6. This can be done with two jumpers connecting the two pins using the two debug headers on the Explorer Board.
3. The PIC18F66K80 can operate between 1.8V and 5V. The supplied voltage can be adjusted by populating the PIM board's R101 and R102 resistors. For more detailed information on varying the device voltage, see "*PICDEM™ PIC18 Explorer Demonstration Board User's Guide*", **Section 2.3.3 "Calculating Other VDD Values"**.

Demonstration Firmware

The PIM is programmed with firmware demonstrating basic features on the PIC18 Explorer Board. The source for the PIC18F66K80 PIM demo code may be downloaded from the Microchip web site.



MICROCHIP

Microchip Technology Inc. • 2355 West Chandler Blvd. • Chandler, AZ 85224-6199
www.microchip.com


The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. PICDEM is a trademark of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies. ISBN: © 2010, Microchip Technology Incorporated, Printed in the U.S.A. All Rights Reserved. 12/10

DS51925A



PIC18F66K80 Plug-in Module for PICDEM™ PIC18 Explorer Board

Board Schematic

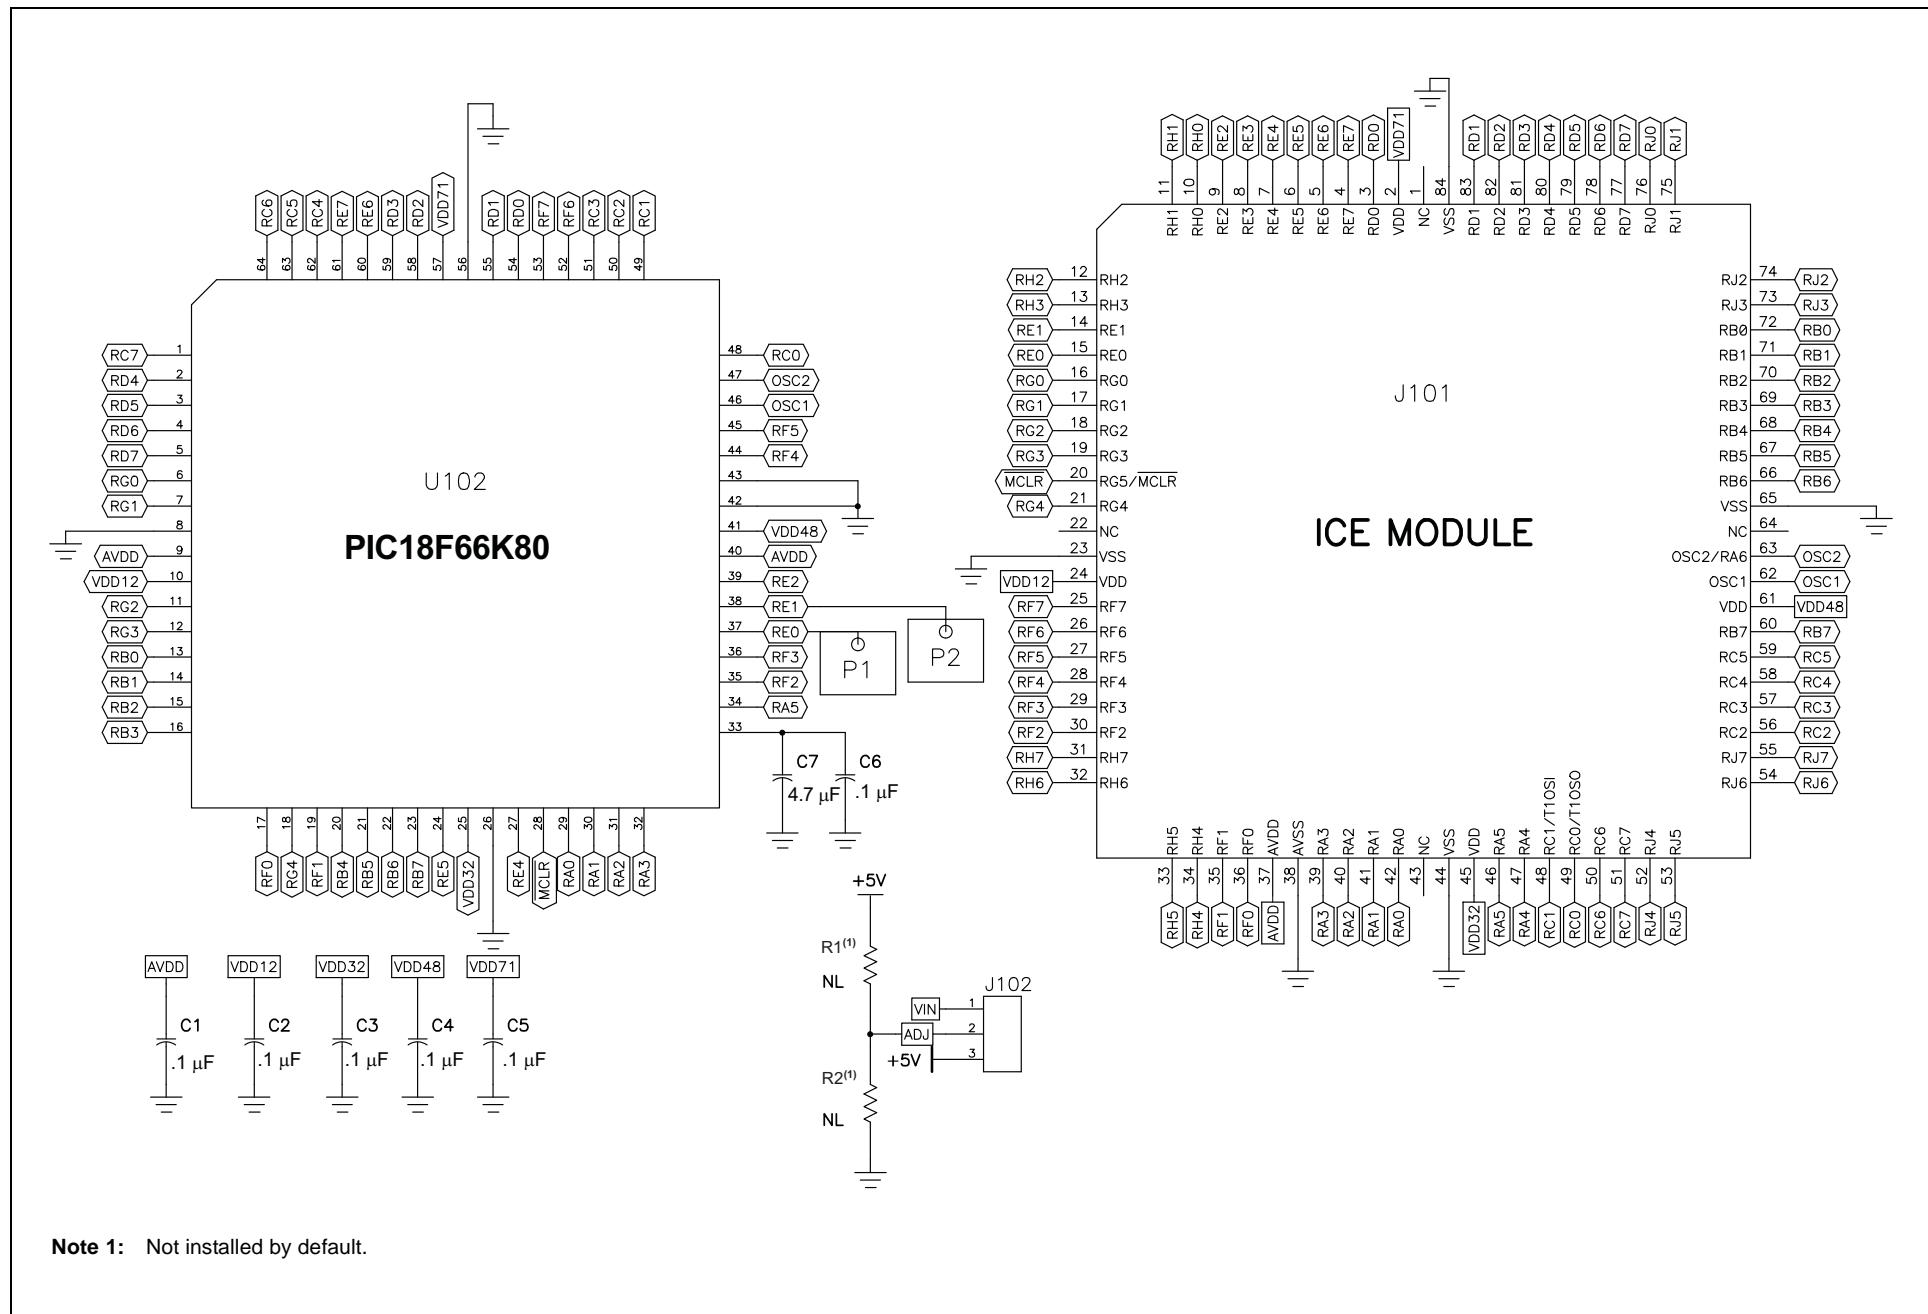



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331