


# Small Planar NFC Antenna with Ferrite



Pulse Part Number W7013

The W7013 is a flexible Near Field Communication (NFC) antenna ideal for tight-space embedded products such as tablets, laptops, printers and other unique system using NFC technology. It is intended for pairing and sharing modes typically found in non-payment NFC applications.



The W7013 has a semi-flexible sintered ferrite backing designed to optimize magnetic fields, thus increasing the corresponding field strength of the antenna. The W7013 is a thin, flexible antenna which can be fed with customer-supplied interconnect cables by using direct-solder methods or with the use of Pulse's own interface connections. Mounting the antenna is easily accomplished using the thin but aggressive holding adhesive backing. Recommended for mounting on the inside of battery covers, directly onto PCB or metal surfaces, or locations where the antenna will be on or in close proximity to ground planes or displays.

## Features

- Excellent performances on metal surfaces
- Thin, semi-flexible structure
- Easily assembles to device covers or mechanics
- Well-known antenna concept, reliable technology
- RoHS compliant product

## Applications

- Mobile devices
- Reader / Writer devices
- Sharing / pairing

## Electrical Specifications

|                                  |                            |
|----------------------------------|----------------------------|
| Frequency [MHz]*                 | 13.56                      |
| Reading Distance on Ground [mm]* | 20 - 25<br>Grid Scan (avg) |
| Impedance [ $\Omega$ ]*          | 50 / 80                    |
| Self Resonance Frequency [MHz]** | 71.5                       |
| Inductance [ $\mu$ H]**          | 1.05                       |
| Resistance [ $\Omega$ ]**        | 2.7                        |
| Q-Factor**                       | 33                         |
| Matched Q Value***               | 5-25                       |

## Environmental Specifications

|                                       |            |
|---------------------------------------|------------|
| Operating Temperature [ $^{\circ}$ C] | -40 to +85 |
|---------------------------------------|------------|

## Mechanical Specifications

|                    |                                        |
|--------------------|----------------------------------------|
| Color              | Black                                  |
| Dimensions [in/mm] | 1.18 x 0.98 x 0.01<br>(30 x 25 x 0.36) |

**NOTE:** Electrical characteristics depend on distance from metal objects and the location of the antenna on the device. Measured in free space

\* With matching network

\*\* Bare coil without any matching network

\*\*\* With matching network (adjustable). Typical network picture refer to page 2.

San Diego, CA 858 674 8100

Vancouver, WA 360 944 7551

Europe 49 7032 7806 0


Asia 86 755 33966678

North Asia 886 3 4356768

China 86 512 6807 9998


# Small Planar NFC Antenna with Ferrite

Pulse Part Number W7013

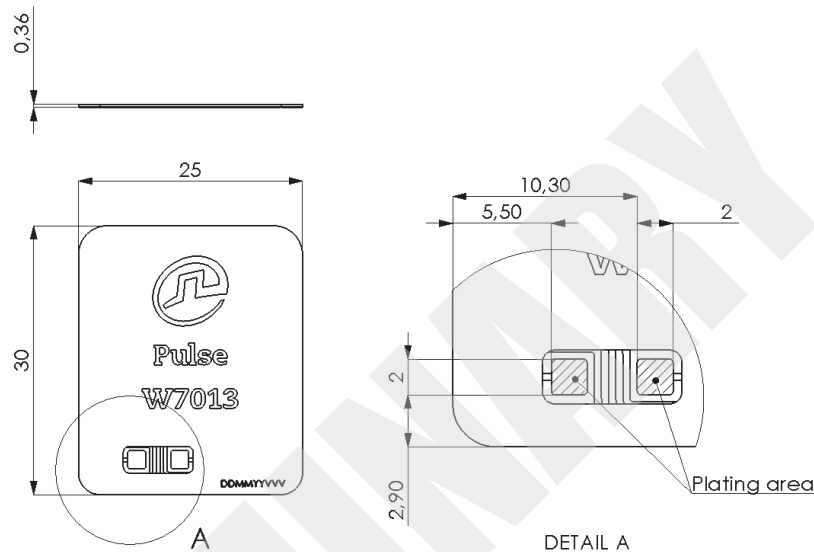

## Recommended matching network

| Component | Value  | Note                                                                                  |
|-----------|--------|---------------------------------------------------------------------------------------|
| Lmc       | 560 nH | Filter resonance at 15.4 MHz                                                          |
| Cmc       | 180 pF | Filter resonance at 15.4 MHz                                                          |
| C1        | 36 pF  | Antenna matching component, value depends on the antenna environment Antenna matching |
| C2        | 124 pF | Antenna matching component, value depends on the antenna environment Antenna matching |
| Rq        | 0 Ohm  | Rq resistors used to lower Q-value if above 35                                        |

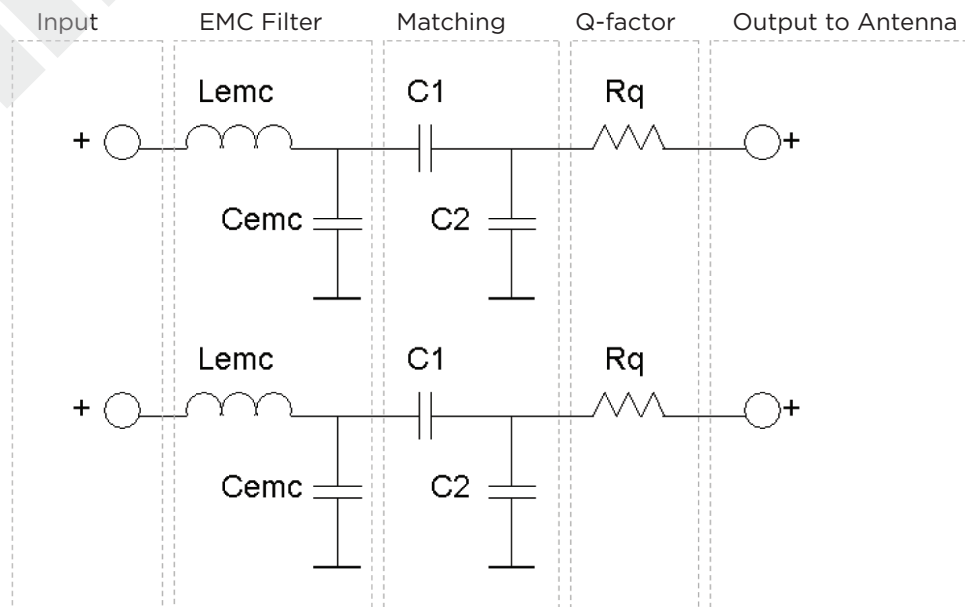



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331