

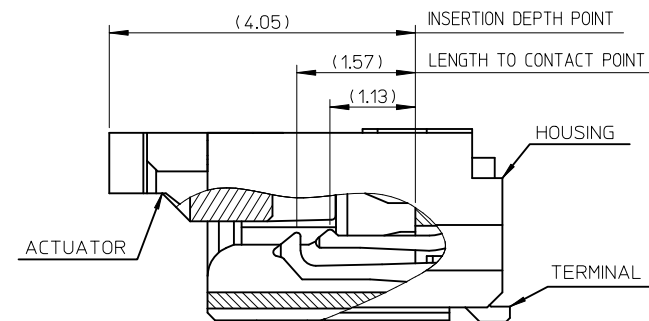
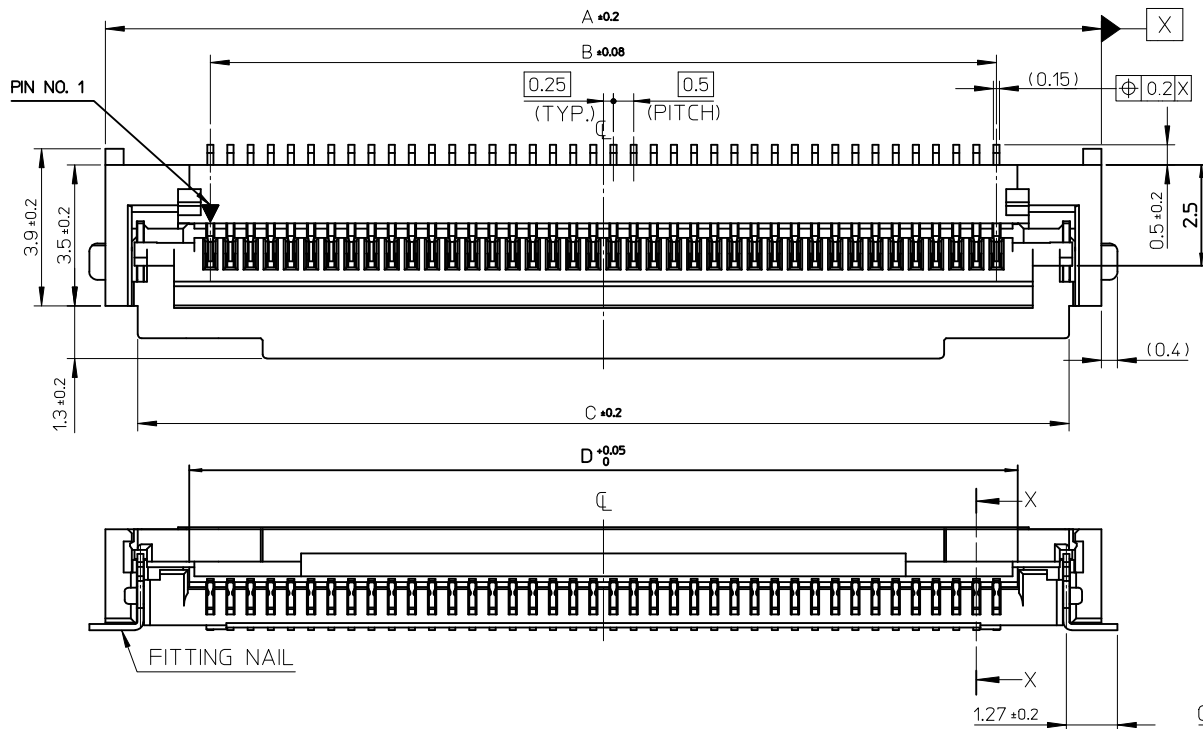




SECTION X-X
Scale 15:1



NOTES

1. MATERIAL

HOUSING LIQUID CRYSTAL POLYMER
GLASS FILLED,UL94V-0(BEIGE)

ACTUATOR PPS GLASS FILLED, UL94V-0(BLACK)

TERMINAL PHOSPHOR BRONZE
(t=0.15)

FITTING NAIL PHOSPHOR BRONZE

2. PLATING

TERMINAL

CONTACT AREA : SEPARATED GOLD PLATING
(0.05 MICROMETER MINIMUM)

SOLDER TAIL AREA : SEPARATED GOLD PLATING

UNDERPLATE : NICKEL OVERALL

(1.0 MICROMETER MINIMUM)

FITTING NAIL

TIN PLATING (1.0 MICROMETER MIN.)

UNDER PLATING : NICKEL PLATING

(1.0 MICROMETER MIN.)

3. IN THE PACKAGE, ACTUATOR OF PART 104060-**10 SHOULD BE CLOSED.

4. FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.

5. R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC/FFC.

6. N: CIRCUIT.

7. ELV AND RoHS COMPLIANT

8. TAILS AND NAILS COPLANALITY TO BE 0.1mm MAX.

40.55	43.1	39.5	44.7	104060-8010	104060-8017	80
30.55	33.1	29.5	34.7	104060-6010	104060-6017	60
D	C	B	A	MATERIAL NO.	EMBOSSED PACKAGE	CIRCUIT

CONNECTOR SERIES No. 104060-**10

SCALE 1:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION

0.5 FFC E/O DUAL CONTACT
HOUSING ASS'Y

MOLEX INCORPORATED

SD-104060-001

SHEET NO.
1 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

10 9 8 7 6 5 4 3 2 1

F



E

D

C

B




A

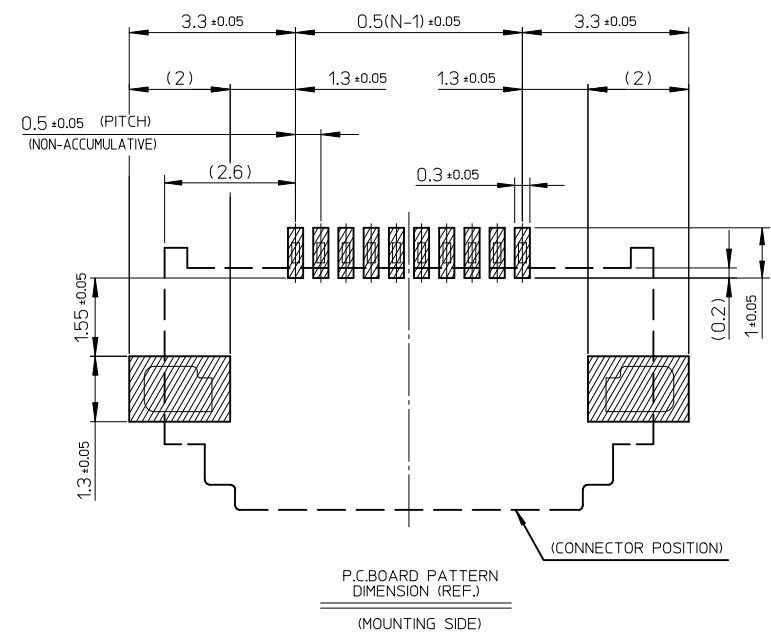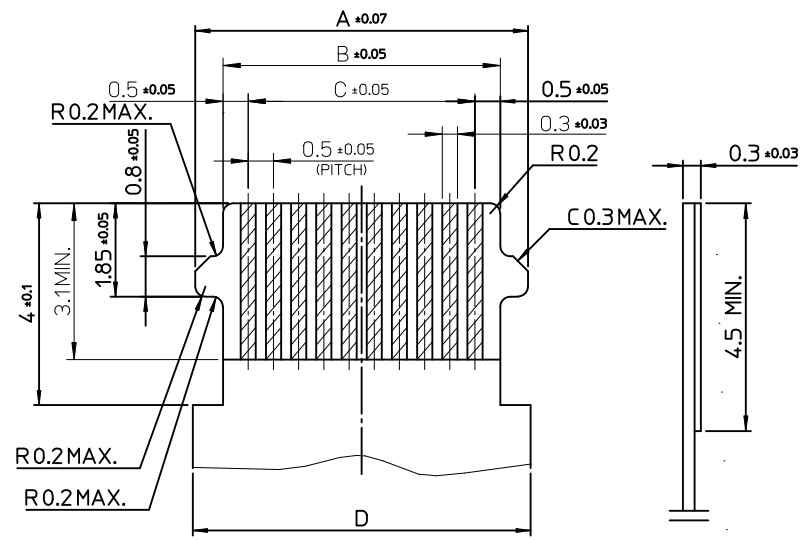

42.3	39.5	40.5	42.2	80
32.3	29.5	30.5	32.2	60
D	C	B	A	CIRCUIT


NEW RELEASED EC NO: KOR2010-0190 DRWN: HYOU CHKD: YS.KIM APPR: YUNS IKKIM	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY YR.KIM	DATE 2009/06/26	TITLE 0.5 FFC E/O DUAL CONTACT HOUSING ASS'Y				
			4 PLACES	± ---	± ---	CHECKED BY YS00.KIM	DATE 2009/06/26	MOLEX INCORPORATED				
			3 PLACES	± ---	± ---	APPROVED BY YS00.KIM	DATE 2009/06/26					
			2 PLACES	± ---	± ---	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-104060-001	SHEET NO. 2 OF 3			
			1 PLACE	± 0.3	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
			ANGULAR ± 1 °									
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

9 8 7 6 5 4 3 2 1

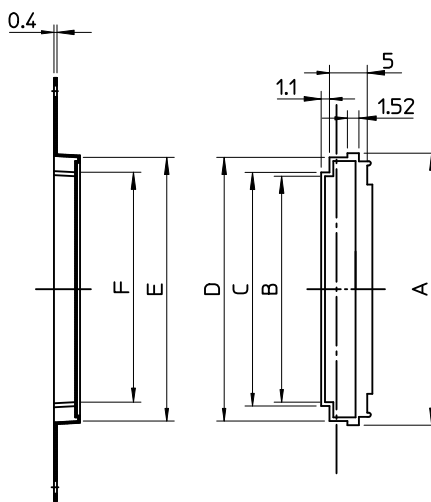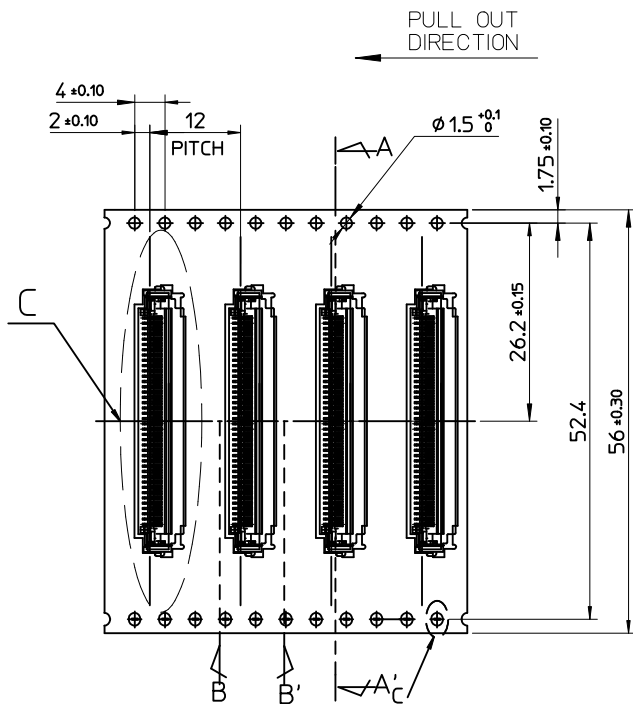

SECTION A-A'


DETAIL C

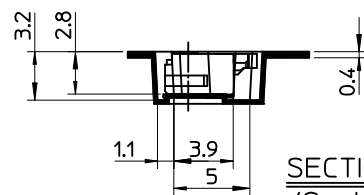

SECTION B-B'
(Scale 2/1)

NOTES

1. NUMBER OF CONNECTORS : 2,400PCS/REEL
2. LEAD TAPE LENGTH
3. FOR DIMENSIONS OF PRODUCT, REFER TO SD-104060-001.
4. MATERIAL
 CARRIER TAPE : POLYETHYLENE TEREPHTHALATE
 TOP TAPE : POLYETHYLENE TEREPHTHALATE , POLYETHYLENE
 REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>
5. ELV AND RoHS COMPLIANT
6. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2GF~60GF)
 (PEELING DIRECTION AS SHOW IN FOLLOW FIG.)
 PEELING OFF SPEED : 300mm/Min.(Ref.)

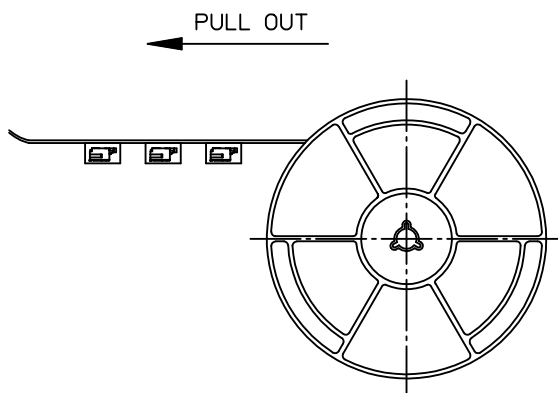

35902-0021	104060-8099	40.9	44.9	44.9	40.9	40	46	104060-8017	80
35902-0021	104060-6099	30.9	34.9	34.9	30.9	30	36	104060-6017	60
COVER TAPE	EMBOSS TAPE	F	E	D	C	B	A	MATERIAL NO.	CIRCUIT

NEW RELEASED EC NO: KOR2010-0190 DRWN: HYOU 2010/06/09 CHKD:KS.KIM 2010/06/09 APPR: YUNSIKKIM 2010/06/09	QUALITY SYMBOLS ▽=0 ◻=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY YR.KIM	DATE 2009/06/26	TITLE 0.5 FFC E/O DUAL CONTACT HOUSING ASS'Y			
			4 PLACES	± ---	± ---	CHECKED BY YS00.KIM	DATE 2009/06/26				
			3 PLACES	± ---	± ---	APPROVED BY YS00.KIM	DATE 2009/06/26				
			2 PLACES	± ---	± ---	MOLEX MOLEX INCORPORATED					
			1 PLACE	± 0.3	± ---						
			ANGULAR ± 1 °		MATERIAL NO.	DOCUMENT NO.	SHEET NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-104060-001		3 OF 3					
A	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331