



HHR200A Cylindrical 4/5A size (HR17/43)

S type


■ Dimensions (with tube) (mm)

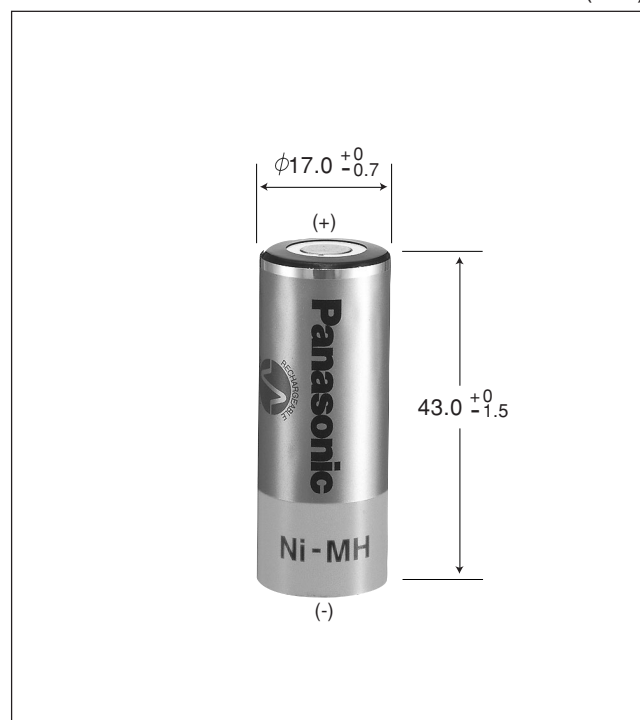

■ Typical charge characteristics

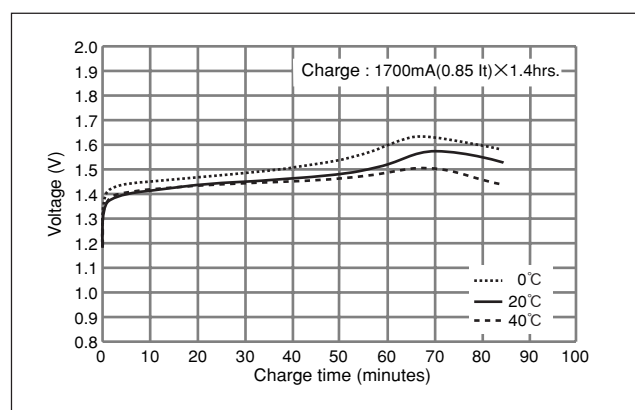

■ Typical discharge characteristics

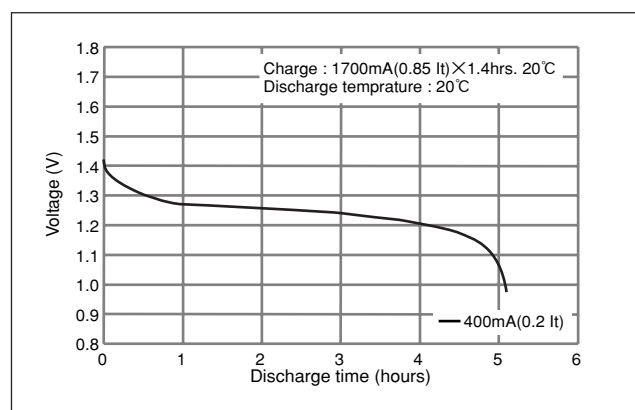

■ Specifications


Diameter	17.0+0 / -0.7mm
Height	43.0+0 / -1.5mm
Approximate Weight	32g

Nominal Voltage		1.2V	
Discharge Capacity ^{*1}	Average ^{*2}	2040mAh	
	Rated (min.)	2000mAh	
Approx. Internal impedance at 1000Hz at charged state.		20m Ω	
Charge	Standard	200mA X 16hrs.	
	Rapid	1700mA X 1.4hrs.	
Ambient Temperature	Charge	Standard	0℃ to 45℃
		Rapid	0℃ to 40℃
	Discharge		-10℃ to 65℃
	Storage	<1 year	-20℃ to 35℃
		<3 months	-20℃ to 45℃
		<1 month	-20℃ to 55℃

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.

*2 For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

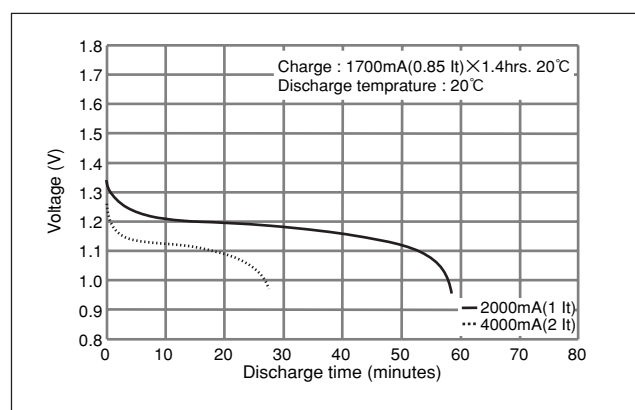

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331