

SHELL SIZE	A THREAD	B		C		D		L MIN	M NOM	Δ N ±.005	MAX ENTRY SIZE
		MAX	NOM	NOM	NOM	NOM	NOM				
09	M12 x 1.0 - 6H	.83	156	1.63	4.75	N/A	TBD	06			
11	M15 x 1.0 - 6H	.97	381	3.25	5.50	N/A	TBD	10			
13	M18 x 1.0 - 6H	1.10	391	7.50	5.75	.25	TBD	12			
15	M22 x 1.0 - 6H	1.18	516	8.75	6.25	.35	1.110	16			
17	M25 x 1.0 - 6H	1.33	656	1.005	6.50	.50	1.235	16			
19	M28 x 1.0 - 6H	1.48	750	1.125	7.00	.63	1.360	20			
21	M31 x 1.0 - 6H	1.60	891	1.250	7.50	.75	1.658	20			
23	M34 x 1.0 - 6H	1.72	969	1.250	7.50	.88	1.658	20			
25	M37 x 1.0 - 6H	1.85	1,125	1.500	8.50	1.00	1.908	24			

TABLE II



	TABLE II					
	ENTRY SIZE	E		F		F MAX
		MIN	MAX	MIN	MAX	
04	04	0.125	0.312	0.957	0.906	
06	06	0.281	0.437	1.145	1.093	
08	08	0.387	0.562	1.332	1.187	
10	10	0.375	0.625	1.332	1.281	
12	12	0.500	0.750	1.551	1.500	
16	16	0.625	0.937	1.770	1.719	
20	20	0.875	1.250	2.113	2.062	
24	24	1.000	1.375	2.363	2.312	

--	--

	TABLE II					
	ENTRY SIZE	E		F		F MAX
		MIN	MAX	MIN	MAX	
04	04	0.125	0.312	0.957	0.906	
06	06	0.281	0.437	1.145	1.093	
08	08	0.387	0.562	1.332	1.187	
10	10	0.375	0.625	1.332	1.281	
12	12	0.500	0.750	1.551	1.500	
16	16	0.625	0.937	1.770	1.719	
20	20	0.875	1.250	2.113	2.062	
24	24	1.000	1.375	2.363	2.312	

SYM	FINISH DESCRIPTION
B	CADMIUM PLATE/OLIVE DRAB
J	GOLD IRRIDIUM OVER CADMIUM PLATE OVER NICKEL
M	ELECTROLESS NICKEL
NF	CAD/C. D. OVER ELECTROLESS NICKEL (500 HOUR SALT SPRAY)
T	CADMIUM PLATE/BRIGHT DIP OVER NICKEL

TABLE III

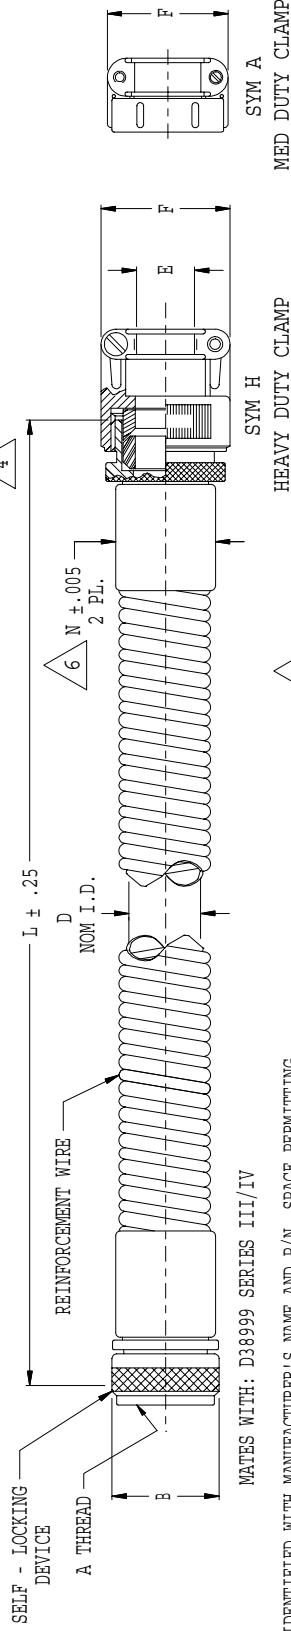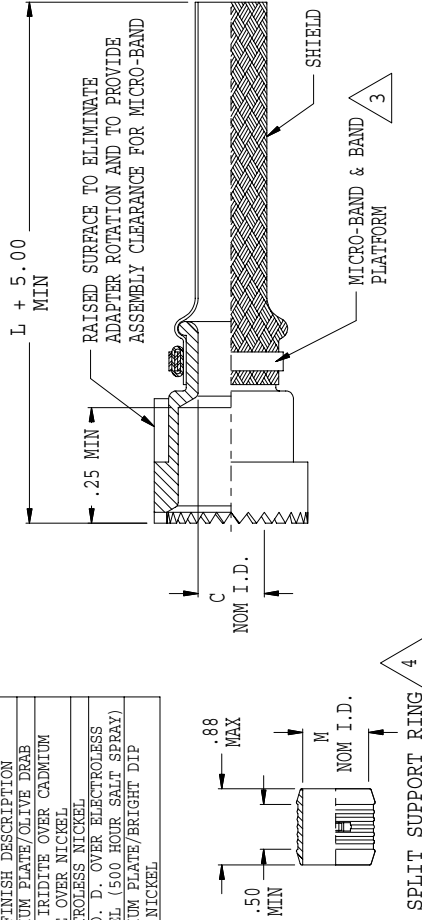

NOTE:

1. ASSEMBLY IDENTIFIED WITH MANUFACTURER'S NAME AND P/N, SPACE PERMITTING.
2. GLENAIR 600 SERIES BACKSHELL ASSEMBLY TOOLS ARE RECOMMENDED FOR ASSEMBLY AND INSTALLATION
3. MICRO-BAND ORDERED SEPARATELY (P/N #600-083), UNLESS "S" OPTION IS SPECIFIED.
4. SPLIT SUPPORT RING (687-207) SIZE PER TABLE I. 600-052 & 600-083 BANDS ORDERED SEPARATELY
5. SIZE 12 MEDIUM DUTY CLAMP (SYM A) SHALL ALLOW FOR .825 MAX BUNDLE AT THE CABLE ENTRY.
SEALING GLAND ENTRY RANGE SHALL ACCOMMODATE .500 MIN TO .750 MAX.
6. 100% "N" CRIMP DIAMETER VERIFICATION REQUIRED. DOCUMENT RESULTS IN VERIFICATION TABLE.

7. MATERIAL/FINISH:

CONDUIT - PFA/NA
ADAPTERS, COUPLING NUTS, RING, CLAMP, SADDLE BARS - AL ALLOY/SEE TABLE III
REINFORCEMENT WIRE, SWAGE RINGS - CRES/PASSIVATE
SHIELD - COPPER/TIN PLATE
SPLIT SUPPORT RING - HIGH PERFORMANCE THERMOPLASTIC/NA
SEALING GLAND & O-RING - SILICONE/NA
MISC. HARARE - CRES/PASSIVATE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN D. MONTVOYA CHECK MP ENGR MP		07/24/02 07/24/02 07/24/02	GLENAIR, INC. 1211 AIR WAY - GLENDALE - CALIFORNIA 91201		CAD 1991
TOLERANCES:							
FRACTIONS		± 1/16					
DECIMALS		.XX ±.03 .XXX ±.015					
ANGLES		± °					
B/F		DO NOT SCALE THIS DRAWING					
		ASSIGNED  APPROVED					
		REBARE DATE ORIGINAL REBARE DATE					
		CODE IDENT. NO.		SIZE		REV.	
		06324		C		749-657 L	
02-1639		P/C		74		SHEET 1 OF 1	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331