


4

3

2

1

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
1	-		A	FIRST ISSUE	12SEP2008	D.C. G.T.
			A8	REVISED: DRAWING FOR EUROPE VERSIONS	08APR2010	D.C. G.T.
			A9	REVISED: CHANGED SALES CONDITIONS	30AUG2010	D.C. G.T.
			B	RELEASED FOR PRODUCTION	30NOV2010	D.C. G.T.

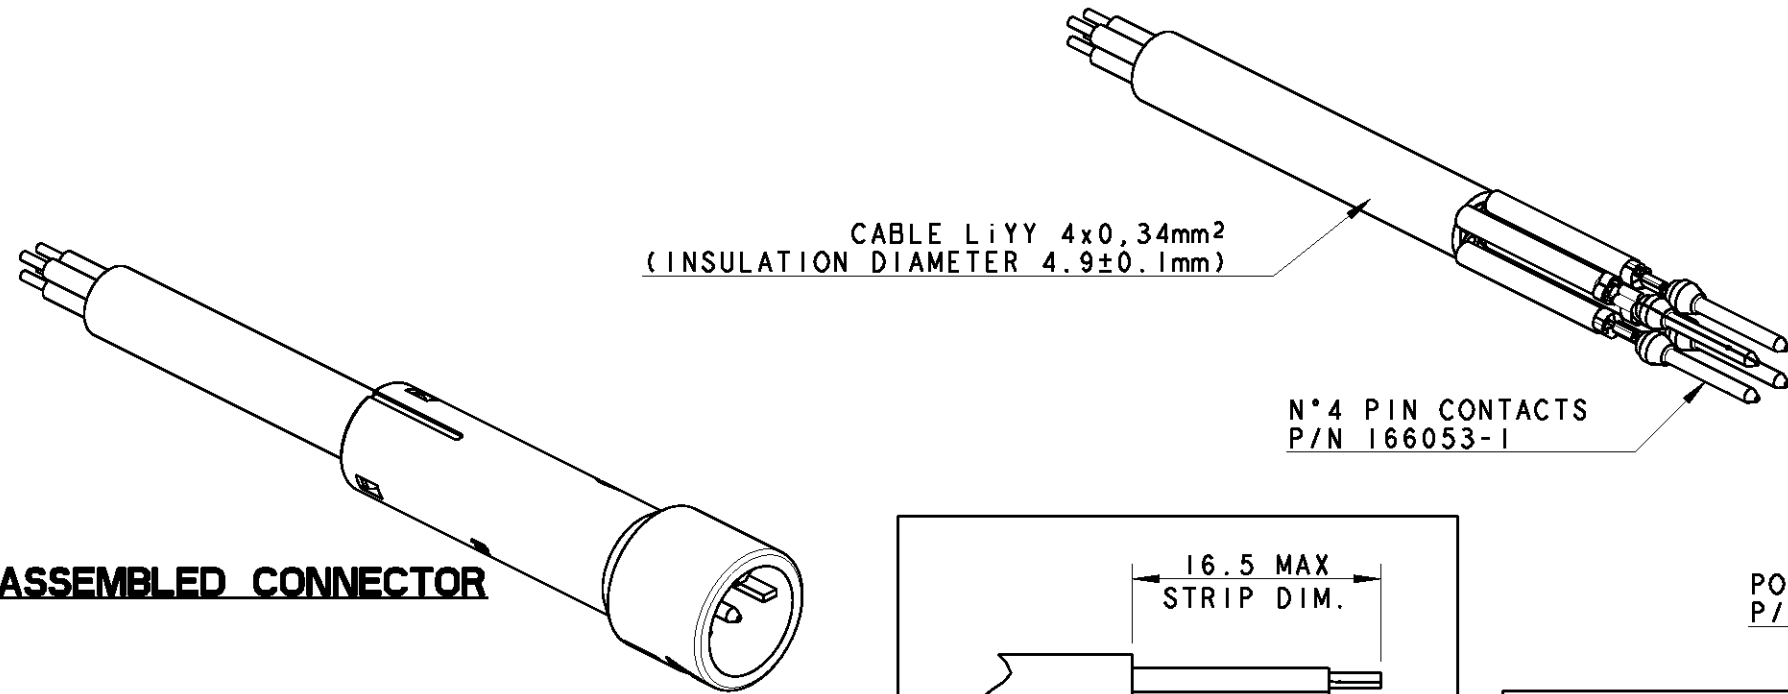


CABLE LiYY 4x0,34mm²
(INSULATION DIAMETER 4.9±0.1mm)

N°4 PIN CONTACTS
P/N 166053-1

MOUNTING OVERVIEW


CONTACTS MUST BE MOUNTED ON THE POSITIONER BEFORE TO INSERT THEM INTO THE HOUSING. MOUNTING SHALL BE ACCORDING TO THE TYCO ELECTRONICS APPLICATION SPEC. 114-20147.



POSITIONER
P/N 293410-3

ASSEMBLED CONNECTOR


VOLTAGE: < 30V r.m.s. (42V PEAK)
MAXIMUM CURRENT: 2A PER WAY (FULL LOADED)

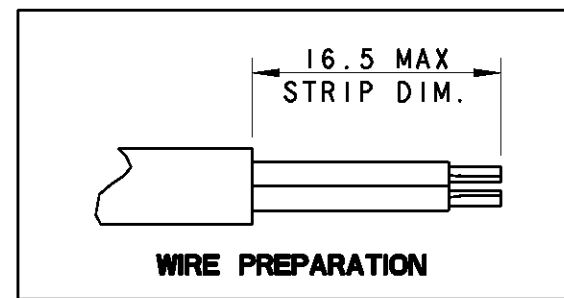

WIRE PREPARATION

THE PRESENTED PRODUCT / DESIGN WILL BE RELEASED FOR THE MANUFACTURING OF THE NECESSARY PRODUCTION TOOLS HEREBY. FURTHER CHANGES HAS TO BE PAYED BY CUSTOMER.


DATE, SIGN OF THE CUSTOMER

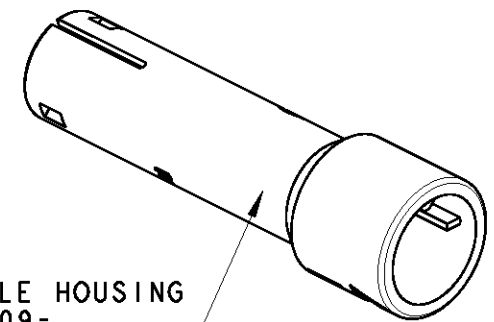

RECEPTACLE HOUSING
P/N 293409-...

- MALE HOUSING (N° 3 VERSIONS):
- P/N 293409-1 (REV. B) IN WHITE COLOUR
 - P/N 293409-2 (REV. B) IN BLACK COLOUR
 - P/N 293409-3 (REV. B) IN GRAY COLOUR

Ø7.90 INCLUDING MARKS & WRITINGS

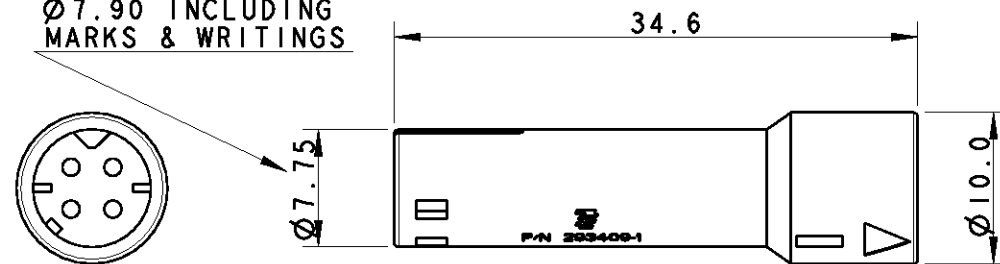


KEYING POLARIZATION FOR
P/N 293409-1 (WHITE VERSIONS)
AND FOR
P/N 293409-2 (BLACK VERSIONS)

KEYING POLARIZATION FOR
P/N 293409-3 (GRAY VERSIONS)

PACKAGING: N° 1500 PCS INTO CARTON BOX, ACCORDING TO PACKAGING SPEC. 107-20289.

293409-3	293410-3	293412-3 (GRAY VERSION)	B
293409-2	293410-3	293412-2 (BLACK VERSION)	B
293409-1	293410-3	293412-1 (WHITE VERSION)	B
MALE HOUSING P/N	POSITIONER P/N	PART NUMBER (KIT)	REV.

- POSITIONER (N° 1 VERSION):
- P/N 293410-3 (REV. B), IN GRAY COLOUR

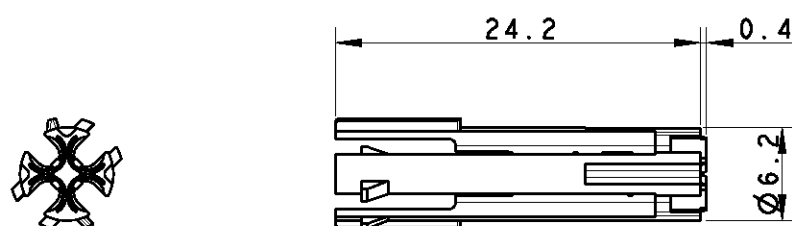

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN D. CHIARELLI 12SEP2008	Tyco Electronics Tyco Electronics AMP Italia S.r.l. C.so F.lli Cervi, 15 - Collegno (TO)		
DIMENSIONS: mm		CHK D. CHIARELLI 12SEP2008			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. TURCO 12SEP2008	NAME 4 POS. LOW VOLTAGE, FREE HANGING, MALE CONNECTOR FOR EUROPE MARKET		
0 PLC ±0.5 1 PLC ±0.3 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-20293	SIZE A3		
MATERIAL PLASTIC PARTS: PA, ACC. TO GLOW WIRE 750°C NO FLAME		APPLICATION SPEC 114-20147	CAGE CODE 00779		
FINISH -		WEIGHT -	DRAWING NO C-293412		
CUSTOMER DRAWING		SCALE 2:1	RESTRICTED TO -		
		SHEET 1	OF 1		
		REV B			



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331