

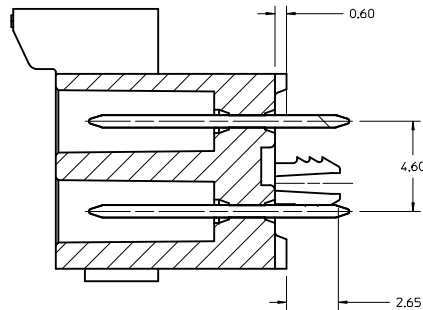
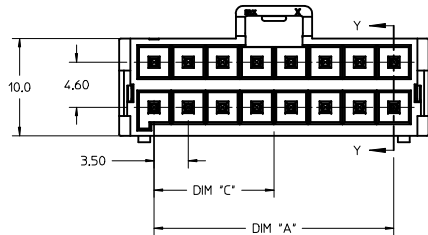



20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1


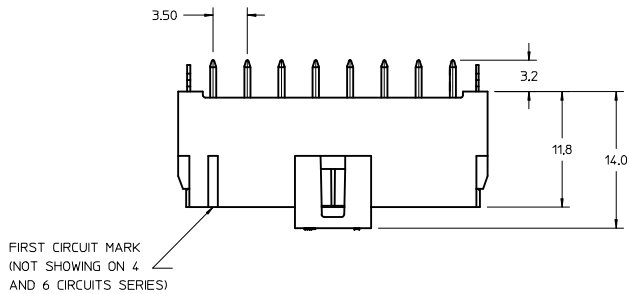


SECTION Y-Y
SCALE 8:1

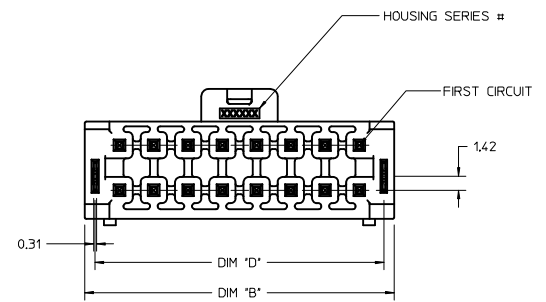










NOTES:

- MATERIAL :
HOUSING
OPTION 1: LCP E130i BLACK
OPTION 2: LCP E130i NATURAL
TERMINAL: COPPER ALLOY
- PLATING FINISH:
OPTION 1 - 1.5µm(60µin)-2.5µm(100µin) TIN OVER
1.25µm(50µin)-2.5µm(100µin) NICKEL OVERALL
OPTION 2 - 0.35µm(15µin) GOLD CONTACT AREA,
1.5µm(60µin)-2.5µm(100µin) TIN TAIL AREA OVER
1.25µm(50µin)-2.5µm(100µin) NICKEL OVERALL
OPTION 3 - 0.70µm(30µin) GOLD CONTACT AREA,
1.5µm(60µin)-2.5µm(100µin) TIN TAIL AREA OVER
1.25µm(50µin)-2.5µm(100µin) NICKEL OVERALL
- PARTS TO BE PACKAGED PER PK-172299-9001
- PRODUCT SPECIFICATION PS-172323-0001
- PART MATES WITH MOLEX RECEPTACLE HOUSING
172258 AND 172262
- PART CONFORMS TO CLASS "C" REQUIREMENTS OF SPECIFICATION
PS-45499-002 WITH 0.13 MM MAXIMUM FLASH ALLOWED IN CORE
HOLES AND FRONT SURFACE.
- DISCOLORATION IN THE BANDOLIER AREA OF THE PIN IS
INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING
EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL
AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE
HEADER ASSEMBLY.
- APPLICATION SPECIFICATION: AS-172323-0001

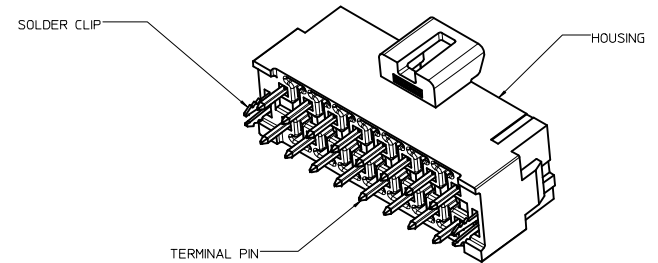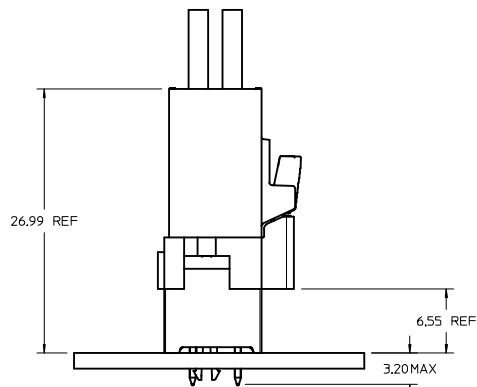

X RELEASE EC NO: UCP2015-4103 DRAWN: DROSCA CHKD: CHYK APPR: RHODGE REV	2015/04/14	2015/04/15	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION																			
				▽=0	<table><tr><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± --- ± ---</td></tr><tr><td>3 PLACES</td><td>± --- ± ---</td></tr><tr><td>2 PLACES</td><td>± 0.25 ± ---</td></tr><tr><td>1 PLACE</td><td>± 0.5 ± ---</td></tr><tr><td>0 PLACE</td><td>± --- ± ---</td></tr></table>	mm	INCH	4 PLACES	± --- ± ---	3 PLACES		± --- ± ---	2 PLACES	± 0.25 ± ---	1 PLACE	± 0.5 ± ---	0 PLACE	± --- ± ---	<table><tr><td>DRAWN BY</td><td>DATE</td></tr><tr><td>DROSCA</td><td>2014/03/04</td></tr><tr><td>CHECKED BY</td><td>DATE</td></tr><tr><td>APPROVED BY</td><td>DATE</td></tr><tr><td>JCOMERCI</td><td>2014/04/24</td></tr></table>	DRAWN BY	DATE	DROSCA	2014/03/04	CHECKED BY	DATE	APPROVED BY	DATE	JCOMERCI	2014/04/24	TITLE ULTRA-FIT VERT HEADER 4-16 CKTS DUAL ROW WITH SOLDER CLIP
	mm	INCH																												
	4 PLACES	± --- ± ---																												
	3 PLACES	± --- ± ---																												
	2 PLACES	± 0.25 ± ---																												
	1 PLACE	± 0.5 ± ---																												
	0 PLACE	± --- ± ---																												
	DRAWN BY	DATE																												
	DROSCA	2014/03/04																												
CHECKED BY	DATE																													
APPROVED BY	DATE																													
JCOMERCI	2014/04/24																													
		▽=0																												
		▽=0																												
		▽=0																												

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

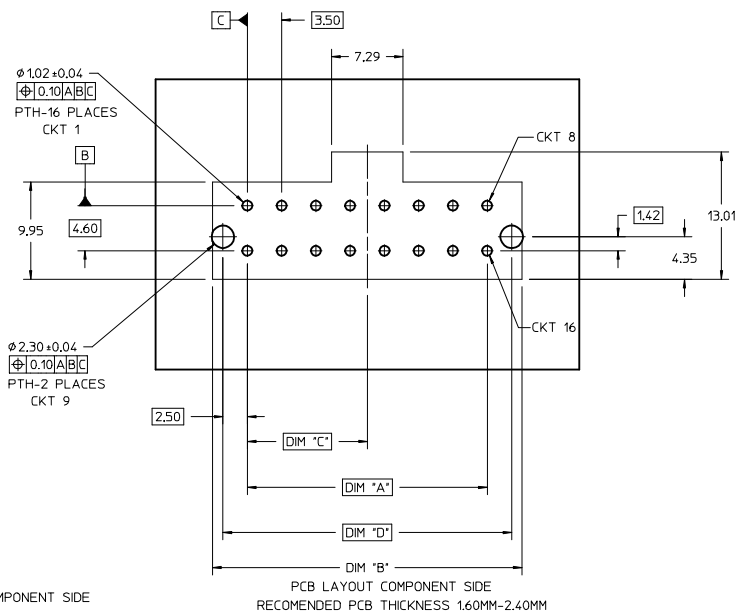

TIN PLATING							
PART NO.	COLOR	CIRCUIT SIZE	KEY OPTION	DIM A	DIM B	DIM C	DIM D
172299-1104	BLACK	4	KEY A	3.50	10.60	1.75	8.50
172299-1106	BLACK	6	KEY A	7.00	14.10	3.50	12.00
172299-1108	BLACK	8	KEY A	10.50	17.60	5.25	15.50
172299-1110	BLACK	10	KEY A	14.00	21.10	7.00	19.00
172299-1112	BLACK	12	KEY A	17.50	24.60	8.75	22.50
172299-1114	BLACK	14	KEY A	21.00	28.10	10.50	26.00
172299-1116	BLACK	16	KEY A	24.50	31.60	12.25	29.50
172299-2104	NATURAL	4	KEY B	3.50	10.60	1.75	8.50
172299-2106	NATURAL	6	KEY B	7.00	14.10	3.50	12.00
172299-2108	NATURAL	8	KEY B	10.50	17.60	5.25	15.50
172299-2110	NATURAL	10	KEY B	14.00	21.10	7.00	19.00
172299-2112	NATURAL	12	KEY B	17.50	24.60	8.75	22.50
172299-2114	NATURAL	14	KEY B	21.00	28.10	10.50	26.00
172299-2116	NATURAL	16	KEY B	24.50	31.60	12.25	29.50

15 MICROINCH GOLD PLATING							
PART NO.	COLOR	CIRCUIT SIZE	KEY OPTION	DIM A	DIM B	DIM C	DIM D
172299-1204	BLACK	4	KEY A	3.50	10.60	1.75	8.50
172299-1206	BLACK	6	KEY A	7.00	14.10	3.50	12.00
172299-1208	BLACK	8	KEY A	10.50	17.60	5.25	15.50
172299-1210	BLACK	10	KEY A	14.00	21.10	7.00	19.00
172299-1212	BLACK	12	KEY A	17.50	24.60	8.75	22.50
172299-1214	BLACK	14	KEY A	21.00	28.10	10.50	26.00
172299-1216	BLACK	16	KEY A	24.50	31.60	12.25	29.50
172299-2204	NATURAL	4	KEY B	3.50	10.60	1.75	8.50
172299-2206	NATURAL	6	KEY B	7.00	14.10	3.50	12.00
172299-2208	NATURAL	8	KEY B	10.50	17.60	5.25	15.50
172299-2210	NATURAL	10	KEY B	14.00	21.10	7.00	19.00
172299-2212	NATURAL	12	KEY B	17.50	24.60	8.75	22.50
172299-2214	NATURAL	14	KEY B	21.00	28.10	10.50	26.00
172299-2216	NATURAL	16	KEY B	24.50	31.60	12.25	29.50

30 MICROINCH GOLD PLATING							
PART NO.	COLOR	CIRCUIT SIZE	KEY OPTION	DIM A	DIM B	DIM C	DIM D
172299-1304	BLACK	4	KEY A	3.50	10.60	1.75	8.50
172299-1306	BLACK	6	KEY A	7.00	14.10	3.50	12.00
172299-1308	BLACK	8	KEY A	10.50	17.60	5.25	15.50
172299-1310	BLACK	10	KEY A	14.00	21.10	7.00	19.00
172299-1312	BLACK	12	KEY A	17.50	24.60	8.75	22.50
172299-1314	BLACK	14	KEY A	21.00	28.10	10.50	26.00
172299-1316	BLACK	16	KEY A	24.50	31.60	12.25	29.50
172299-2304	NATURAL	4	KEY B	3.50	10.60	1.75	8.50
172299-2306	NATURAL	6	KEY B	7.00	14.10	3.50	12.00
172299-2308	NATURAL	8	KEY B	10.50	17.60	5.25	15.50
172299-2310	NATURAL	10	KEY B	14.00	21.10	7.00	19.00
172299-2312	NATURAL	12	KEY B	17.50	24.60	8.75	22.50
172299-2314	NATURAL	14	KEY B	21.00	28.10	10.50	26.00
172299-2316	NATURAL	16	KEY B	24.50	31.60	12.25	29.50

SEE PAGE 1 EC NO: UC2015-4103 IDW:DWSCROSCA CHKD: APPR:RHOJGE 2015/04/14 2015/04/15 B5	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
	▽=0 ▽=0 ▽=0		mm	INCH	DRAWN BY	DATE	TITLE ULTRA-FIT VERT HEADER 4-16 CKTS DUAL ROW WITH SOLDER CLIP molex SD-172299-1000				
		4 PLACES	±	±	DWSCROSCA	2014/03/04					
		3 PLACES	±	±	CHECKED BY	DATE					
		2 PLACES	±	±	APPROVED BY	DATE					
		1 PLACE	±	±	JCOMERC I	2014/04/24					
		0 PLACES	±	±	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	B5	REVISION	ANGULAR ±1/2°		SEE PAGE 1		SD-172299-1000				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331